

InvisiLED® Classic 24V

24V LED Tape Light

WAC LIGHTING

Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION

Our versatile 24 volt tape light comes in four colors making it perfect for unique accent lighting applications. This easily customized system brings life to spaces normally left dull and boring.

FEATURES


- Ultra thin profile at 1/8"
- Diodes spaced evenly at 1" on center
- Minimum run length of 1'
- May be field cut every 2" at the end of a run
- Three mounting methods provided for different surfaces
- Specially rated for installation in the storage area of a clothes closet
- 50,000 hour rated life
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Flexible, silicone cased tape light. Peel and stick 3M construction adhesive on back. Indicating marks on back for field cutting.
- Power Supply:** Remote and plug-in electronic Class 2 transformers. 120VAC 50/60Hz input, 24V 60W and 96W output.
- Light Source:** 12 LEDs per foot
- Dimming:** May be dimmed with electronic low voltage (ELV) dimmer.
- Operating Temp:** -4°F – 122°F (-20°C – 50°C), relative humidity 95%.
- Standards:** UL & CUL Listed for damp locations.

ORDER NUMBER – TAPE SECTION

Model	Watts/ft	Length	Qty	Light Color	Lumens/ft
LED-T24	2	2IN 2 inches	1	AM Amber 595nm	22
		1 1 foot	1	BL Blue 465nm	20
		5 5 feet	1	GR Green 520nm	60
				RD Red 630nm	30
LED-T2430	2	2IN 2 inches	1	WT White 3000K 85CRI	115
		2IN-10 2 inches	10		
		1 1 foot	1		
		1-40 1 foot	40		
		5 5 feet	1		

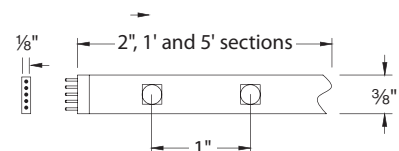


LED-T24 ____ - ____ - ____

Example: **LED-T2430-2IN-10-WT**

ORDER NUMBER – 3 LED "L" CONNECTOR

Model	Watts	Light Color	Lumens
LED-T2430-3L-WT	0.5	White 3000K 85CRI	30



LED-T2430-3L-WT

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050




Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

InvisiLED® Pro 2



24V LED Tape Light






Class 2 Power Supply (Required)

Type		Model	Input	Output	Max Run	Dim	
Remote		EN-2460-RB2-T	120VAC	24VAC / 60W	30 feet	Yes	<i>Includes a 6 foot lead wire</i>
		EN-24100-RB2-T	120VAC	24VAC / 96W	40 feet	Yes	
Plug-in		EN-2460-P-AR-T	120VAC	24VAC / 60W	30 feet	Yes	<i>Includes a 6 foot lead wire</i>
		EN-24100-P-AR-T	120VAC	24VAC / 96W	40 feet	Yes	
Remote 277V		EN-24100-277-RB2-T	277VAC	24VDC / 96W	40 feet	No	<i>Includes a 6 foot lead wire</i>

Accessories

Aluminum Channel		LED-T-CH	5 feet	<i>Includes a diffuser, two end caps, and five screws</i>
Deep Aluminum Channel		LED-T-CH1	5 feet	<i>Includes a diffuser, two end caps, and five screws</i>
45° Angled Aluminum Channel		LED-T-CH2	5 feet	<i>Includes a diffuser, two end caps, and five screws</i>
Fixed Angle Channel Clip		LED-T-CL3-PT	5 feet	<i>Used to mount any aluminum channel Includes 2 pieces, 4 screws</i>
Adjustable Channel Clip		LED-T-CL2-PT	5 feet	<i>Used to mount any aluminum channel Adjusts 50° from center either way Includes 2 pieces, 4 screws</i>
Retrofit Channel		LED-T-RC	3 feet	<i>Creates fixed curves</i>
Clip		LED-T-CL	10 pcs	<i>Holds the tape from the underside Includes 10 pieces, 10 screws</i>
Curve Clip		LED-T-CL1	10 pcs	<i>Runs over the tape to secure the angled tape Includes 2 pieces, 4 screws</i>

Lead Wire		LED-TC-P-2 LED-TC-P-12	2 ft 12 ft	<i>Alternative lengths for plug-in power supplies</i>
Extension Cable		LED-TC-EXT-144	12 ft	<i>Extends distance between a hard wired power supply or wiring box to a tape section</i>
Low Voltage Wiring Box With Feed		LED-TC-B-2	L: 1½ in W: ¾ in H: 7⁄8 in	<i>Neatly houses up to two wires with 2" female feed</i>
Low Voltage Wiring Box		LED-T-B	L: 1½ in W: ¾ in H: 7⁄8 in	<i>Neatly houses up to two wires</i>
Wiring Box With Switch		TB-S	L: 6¼ in W: 1½ in H: 1¼ in	<i>Use when spanning a large gap in a system layout without leaving exposed wiring</i>

Joiner Cable		LED-TC-IC2 LED-TC-IC6 LED-TC-IC12 LED-TC-IC36 LED-TC-IC72	2 in 6 in 12 in 36 in 72 in	<i>Connects tape sections</i>
3-Way "Y" Connector		LED-TC-Y		<i>Connects tape sections</i>
4-Way "X" Connector		LED-TC-X		<i>Connects tape sections</i>
"L" Connector		LED-TC-L		<i>Connects tape sections</i>
End cap		LED-TC-EC		<i>1 cut end cap 1 male end cap</i>