

HIGHLIGHTS


- IC Rated - No Housing Required
- Suitable for Damp Locations
- Energy Star, ETL, ROHS compliant
- Choice of CCT: 30K 40K & 50K
- 50,000hr Extra-Long Life
- Dimmable
- Ultra Sleek Design
- Simple Recessed installation
- Available in 2 and 3 inch
- Available in Round and Square

LUXRITE LED

2"-3"
GIMBAL
SHAPE



3" Gimbal Round

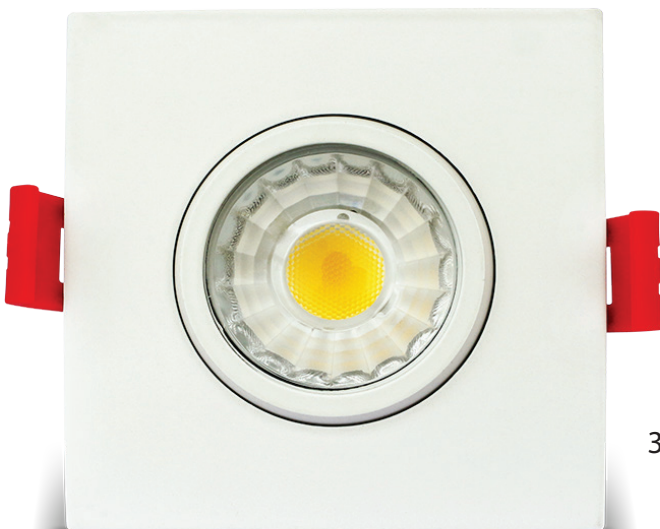

3" Gimbal Square



2" Gimbal Round


SPECIFICATIONS

LUXRITE


MODEL	FLOOD	AVERAGE LIFETIME	TRIM COLOR	WARRANTY	CRI	INPUT VOLTS	DIMMABLE	BOX SIZE
ALL	40°	50000hrs (45.7yrs)	White	3 Year	80	120	Yes	2.32" (59mm) x 3.22" (82mm) x 1.50" (38mm)

	MODEL	DESCRIPTION	WATT	LUMENS	COLOR	TEMPERATURE	LUMEN EFFICACY	POWER FACTOR	CUTOUT
2"	LR23237	LED5W/DL2/GB/30K/FL	5	400	3000K	SOFT WHITE	80.0	>0.90	2.5" (50mm)
	LR23238	LED5W/DL2/GB/40K/FL	5	400	4000K	COOL WHITE	80.0	>0.90	2.5" (50mm)
	LR23239	LED5W/DL2/GB/50K/FL	5	400	5000K	BRIGHT WHITE	80.0	>0.90	2.5" (50mm)
3"	LR23240	LED8W/DL3/GB/30K/FL	8	600	3000K	SOFT WHITE	75.0	>0.98	2.75" (70mm)
	LR23245	LED8W/DL3/GB/50K/SQ	8	600	5000K	BRIGHT WHITE	75.0	>0.98	2.75" (70mm)
	LR23247	LED8W/DL3/GB/30K/SQ	8	600	3000K	SOFT WHITE	75.0	>0.90	2.75" (70mm)
	LR23249	LED8W/DL3/GB/50K/SQ	8	600	5000K	BRIGHT WHITE	75.0	>0.90	2.75" (70mm)

3" ROUND DIMENSIONS

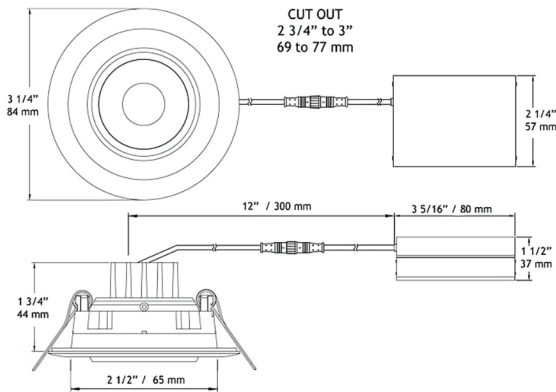

3" SQUARE DIMENSIONS

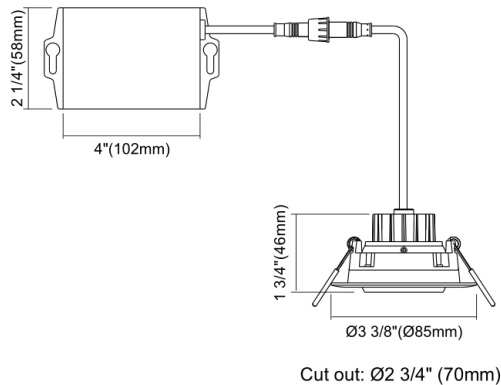

2" DIMENSIONS

