




RECESSED REGRESSED DOWNLIGHT ROUND & SQUARE 2"



2"

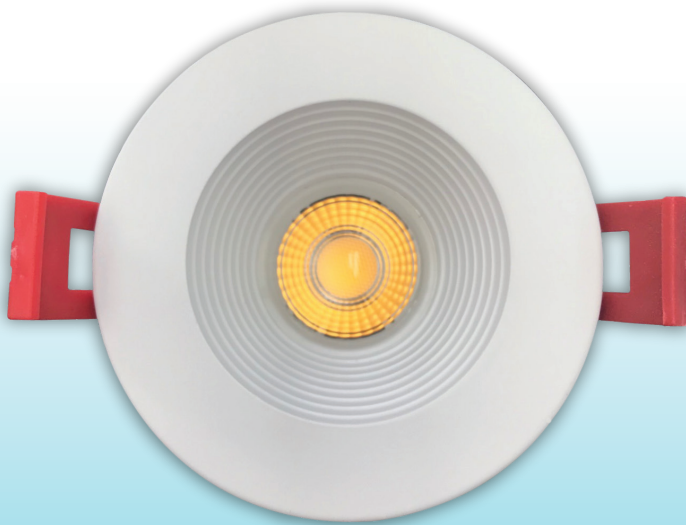

2"

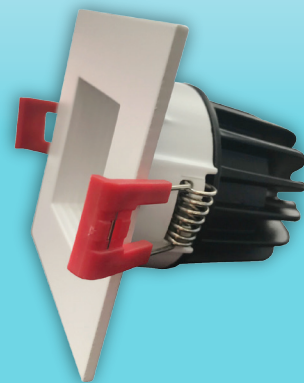

SPECIFICATIONS

ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	WATT REPLACEMENT	LIFETIME	IC RATED
LR23271	LED/RDL3/30K/RD	8	120	YES	75	50	50,000	YES
LR23273	LED/RDL3/40K/RD	8	120	YES	75	50	50,000	YES
LR23274	LED/RDL3/50K/RD	8	120	YES	75	50	50,000	YES
LR23276	LED/RDL3/30K/SQ	8	120	YES	75	50	50,000	YES
LR23278	LED/RDL3/40K/SQ	8	120	YES	75	50	50,000	YES
LR23279	LED/RDL3/50K/SQ	8	120	YES	75	50	50,000	YES




PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI
LR23271	3000K	SOFT WHITE	600	36°	80
LR23273	4100K	COOL WHITE	600	36°	80
LR23274	5000K	BRIGHT WHITE	600	36°	80
LR23276	3000K	SOFT WHITE	600	36°	80
LR23278	4100K	COOL WHITE	600	36°	80
LR23279	5000K	BRIGHT WHITE	600	36°	80


GENERAL

DAMP LOCATION	COST/YR	ENERGY STAR	ETL LISTED
YES	\$ 0.96	YES	YES
YES	\$ 0.96	YES	YES
YES	\$ 0.96	YES	YES
YES	\$ 0.96	YES	YES
YES	\$ 0.96	YES	YES
YES	\$ 0.96	YES	YES

DIMENSIONS

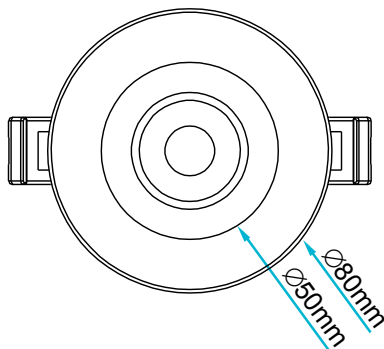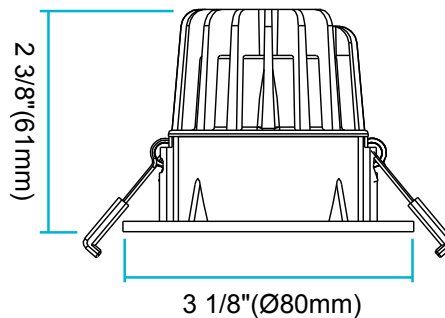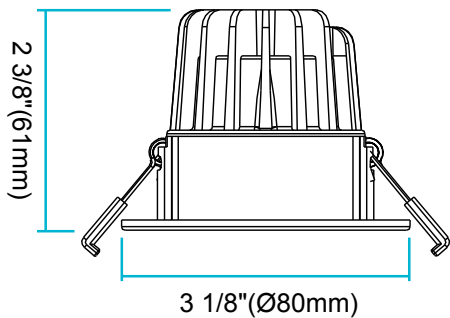


2" ROUND

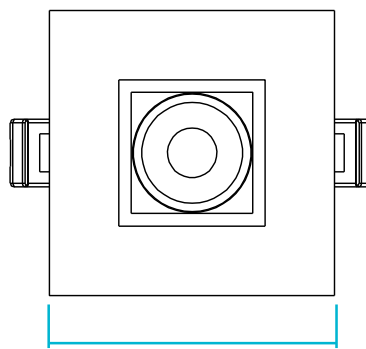

2" SQUARE

INSTALLATION

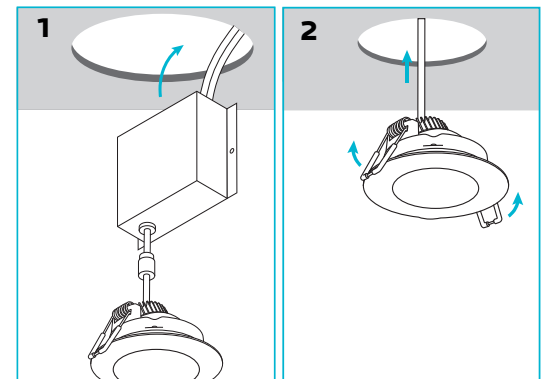

COMPATIBLE WITH THE
LR41001 MOUNTING PLATE

