

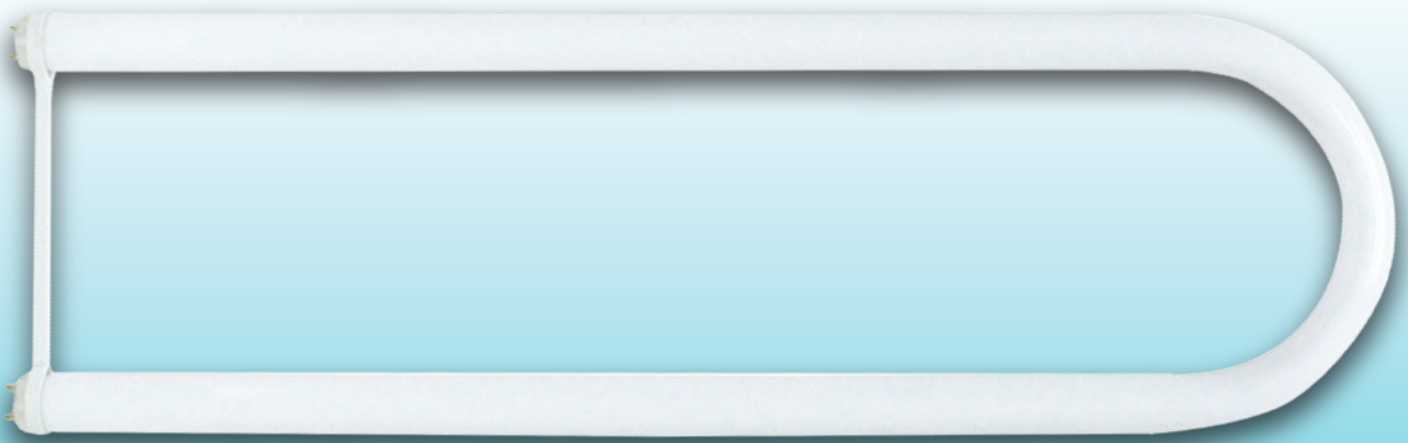



RETROFIT TUBE T8 U6



T8 U6



SPECIFICATIONS

ELECTRICAL

MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMABLE	EFFICACY (LPW)	WATT REPLACEMENT	LIFETIME	POWER FACTOR
LR23505	LED16T8/30K/U6	15	BALLAST DEPENDANT	NO	120.0	32	50,000	>0.96
LR23506	LED16T8/35K/U6	16	BALLAST DEPENDANT	NO	112.5	32	50,000	>0.96
LR23507	LED16T8/40K/U6	16	BALLAST DEPENDANT	NO	115.6	32	50,000	>0.96
LR23508	LED16T8/50K/U6	16	BALLAST DEPENDANT	NO	118.9	32	50,000	>0.96

PHOTOMETRIC

GENERAL

MODEL	COLOR (CCT)	TEMP	LUMEN	FLOOD	CRI	DAMP LOCATION	COST/YR	UL LISTED
LR23505	3000K	SOFT WHITE	1800	240°	83	NO	\$1.81	YES
LR23506	3500K	NATURAL	1800	240°	83	NO	\$1.93	YES
LR23507	4100K	COOL WHITE	1850	240°	83	NO	\$1.93	YES
LR23508	5000K	BRIGHT WHITE	1900	240°	83	NO	\$1.93	YES

DIMENSIONS

