

COMMERCIAL DOWNLIGHT

**CCT SELECT
WATTAGE SELECT**
4", 6" & 8"



**CCT & WATTAGE
SELECT SWITCHES
ON THE BACK**

COMPATIBLE WITH:

**LR35123
LR35124**


EM LED DRIVER



**LR23948, LR23951
COMPATIBLE WITH:**

LR41002

**NEW
CONSTRUCTION
MOUNTING PLATE**



SPECIFICATIONS

ELECTRICAL







MODEL	DESCRIPTION	POWER	LUMEN	EFFICACY	INPUT VOLTS	DIMMABLE	FREQUENCY	LIFETIME	POWER FACTOR
LR23948	LED/CDL4HO/3WO/3CCT/B/3B	9W	810	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		12W	1080						
		15W	1350						
LR23951	LED/CDL6HO/3WO/3CCT/B/3B	12W	1140	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		16W	1520						
		20W	1900						
LR23959	LED/CDL8HO/3WO/3CCT/B/3B	16W	1600	90	120-277V	0-10V	50/60Hz	50,000	>0.9
		21W	2100						
		27W	2700						

PHOTOMETRIC

MODEL	COLOR (CCT)	TEMP	FLOOD	CRI	IC RATED	WET LOCATION	UL LISTED	ENERGY STAR
LR23948	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES
LR23951	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES
LR23959	3000K/4000K/5000K	SOFT/COOL/BRIGHT	120°	80	YES	YES	YES	YES

GENERAL

DIMENSIONS

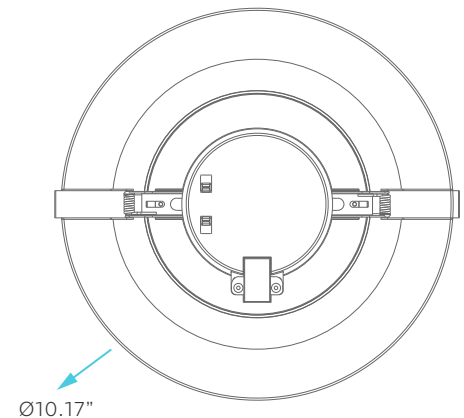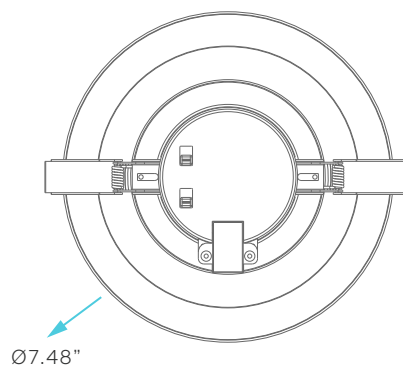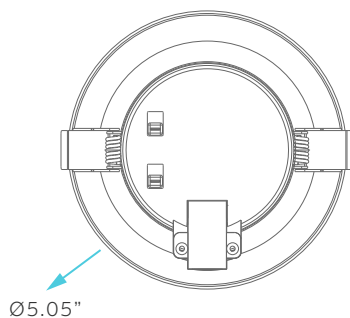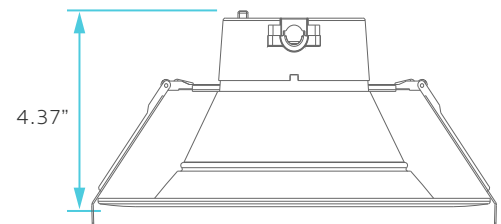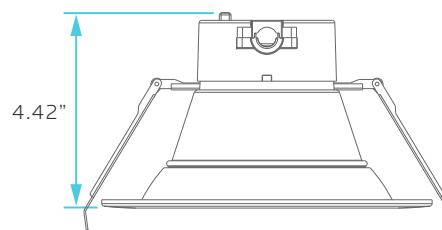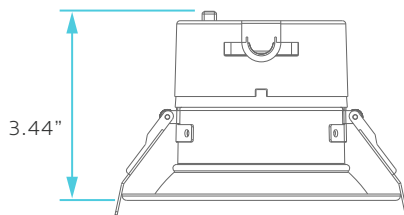

4"

6"

8"



Cutout: Ø 4.30"



Cutout: Ø 6.30"



Cutout: Ø 7.87"