

LED SURFACE MOUNT SLIM PANEL - CCT & WATTAGE SELECTABLE 1X1, 1X2, 2X2, 1X4



1X1 LR24010

12W 16W 20W



1X2 LR24011

18W 24W 30W



2X2 LR24012

30W 40W 50W



1X4 LR24013

30W 40W 50W



2X4 LR24014

40W 50W 62W



COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

**WATTAGE
SELECTABLE**

3 OPTIONS

DIMMABLE

0-10V





ELECTRICAL

	MODEL	DESCRIPTION	POWER	LUMEN	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
1x1	LR24010	LED1X1SPNL/3WO/5CCT	12	1400	120-277V	110	50,000	\$ 2.40
			16	1800				
			20	2200				
1X2	LR24011	LED1X2SPNL/3WO/5CCT	18	2000	120-277V	110	50,000	\$ 3.61
			24	2650				
			30	3300				
2X2	LR24012	LED2X2SPNL/3WO/5CCT	30	3300	120-277V	110	50,000	\$ 6.02
			40	4400				
			50	5500				
1X4	LR24013	LED1X4SPNL/3WO/5CCT	30	3300	120-277V	110	50,000	\$ 6.02
			40	4400				
			50	5500				
2X4	LR24014	LED2X4SPNL/3WO/5CCT	40	5000	120-277V	110	50,000	\$ 7.46
			50	6000				
			62	7500				

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	FLOOD*	CRI	ETL	DLC
LR24010	LED1X1SPNL/3WO/5CCT	2700K/3000K/3500K/4000K/5000K	CCT SELECTABLE	120°	80	YES	S-05LSL7
LR24011	LED1X2SPNL/3WO/5CCT	2700K/3000K/3500K/4000K/5000K	CCT SELECTABLE	120°	80	YES	S-VB8GMS
LR24012	LED2X2SPNL/3WO/5CCT	2700K/3000K/3500K/4000K/5000K	CCT SELECTABLE	120°	80	YES	S-F7HC4G
LR24013	LED1X4SPNL/3WO/5CCT	2700K/3000K/3500K/4000K/5000K	CCT SELECTABLE	120°	80	YES	S-CQ5GQH
LR24014	LED2X4SPNL/3WO/5CCT	2700K/3000K/3500K/4000K/5000K	CCT SELECTABLE	120°	80	YES	S-DW7H84

DIMENSIONS

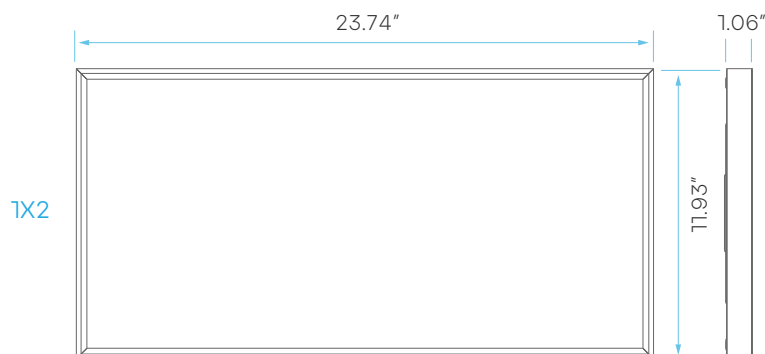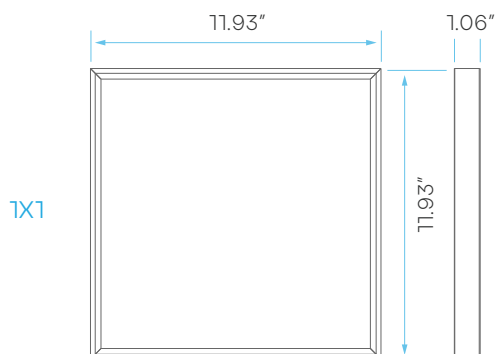

DIMENSIONS

