
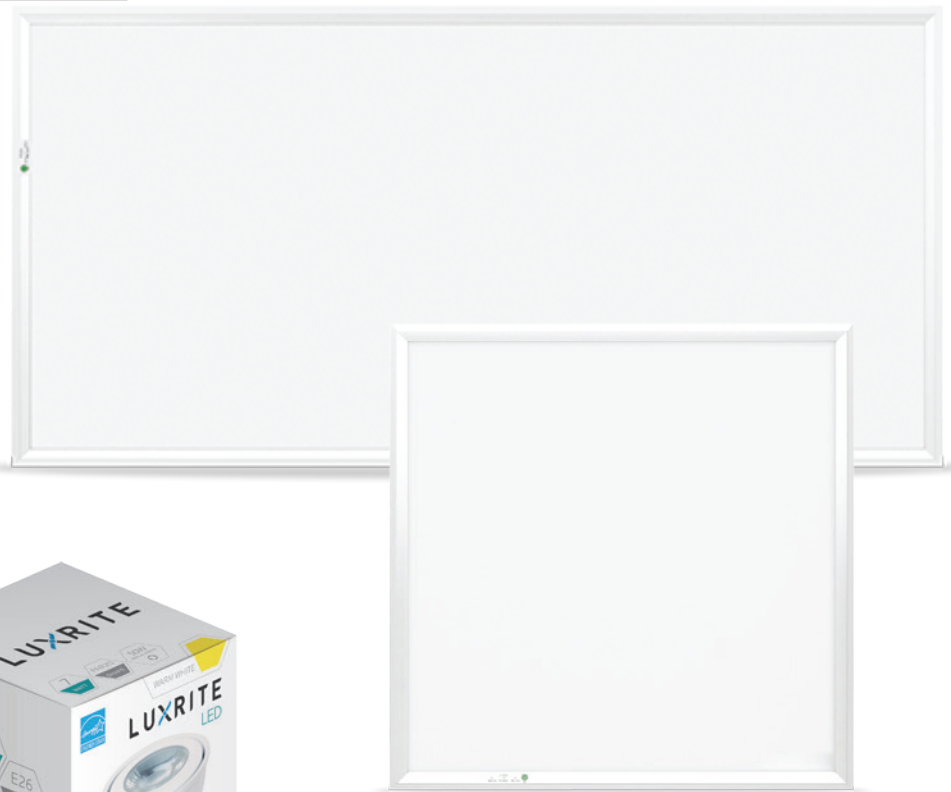


HIGHLIGHTS

- 120 Min Integrated Battery
- DLC -UL-cUL listed
- Choice of CCT: 3000k, 3500k, 4000k, 5000k, 6500k
- Available in
2' X 2' and 2' X 4' Panel's
- 50,000hr extra-long life
- 0-10V dimming
- Ultra sleek design
(1/2 inch thick panel)

LUXRITE LED

Integrated Emergency Backup



LUXRITE

SPECIFICATIONS

MODEL	CASE	FLOOD	AVERAGE LIFETIME	INPUT VOLTS	POWER FACTOR	FREQUENCY	DIMMABLE
ALL	2	120°	50000hrs (45.7yrs)	120-277	>0.90	50-60Hz	Yes

MODEL	DESCRIPTION	WATT	LUMENS	COLOR	TEMPERATURE	CRI	LUMEN EFFICACY	CURRENT	DLC	UL LISTED
LR24060	LED45W2X2PANEL/30K/DIM/EMR	45	4390	3000K	SOFT WHITE	>80	97.6	480mA		
LR24061	LED45W2X2PANEL/35K/DIM/EMR	45	4720	3500K	NATURAL	>80	104.9	480mA		
LR24062	LED45W2X2PANEL/40K/DIM/EMR	45	4800	4000K	COOL WHITE	>80	106.7	480mA		
LR24063	LED45W2X2PANEL/50K/DIM/EMR	45	5000	5000K	BRIGHT WHITE	>80	111.1	480mA		
LR24064	LED45W2X2PANEL/65K/DIM/EMR	45	5000	6500K	DAYLIGHT	>80	111.1	480mA		

Battery Characteristics:

* Battery Power Wattage: 10

* Battery Power Time: 120 Minutes

LR24065	LED60W2X4PANEL/30K/DIM/EMR	60	6540	3000K	SOFT WHITE	>80	109.0	630mA		
LR24066	LED60W2X4PANEL/35K/DIM/EMR	60	6630	3500K	NATURAL	>80	110.5	630mA		
LR24067	LED60W2X4PANEL/40K/DIM/EMR	60	6720	4000K	COOL WHITE	>80	112.0	630mA		
LR24068	LED60W2X4PANEL/50K/DIM/EMR	60	6960	5000K	BRIGHT WHITE	>80	116.0	630mA		
LR24069	LED60W2X4PANEL/65K/DIM/EMR	60	6960	6500K	DAYLIGHT	>80	116.0	630mA		

Battery Characteristics:

* Battery Power Wattage: 17

* Battery Power Time: 120 Minutes

2'x2'

2'x4'