

FLAT PANEL


1x4ft, 2x2ft, 2x4ft



2x4 ft



2x2 ft

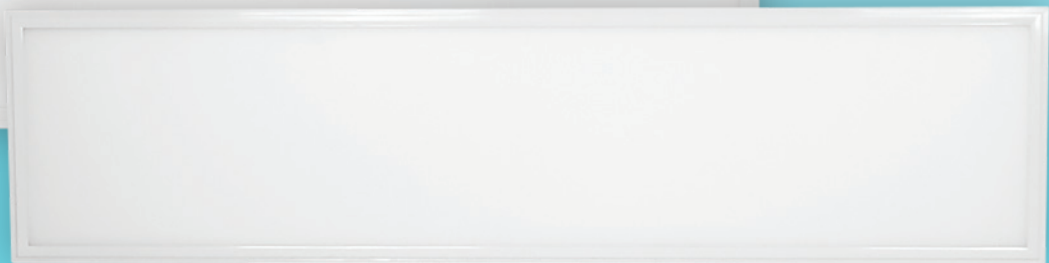

1x4 ft



SPECIFICATIONS

1x4 Flat Panels

Item Description	LED45W1X4PANEL/30K/DIM	LED45W1X4PANEL/35K/DIM	LED45W1X4PANEL/40K/DIM	LED45W1X4PANEL/50K/DIM	LED45W1X4PANEL/65K/DIM
Model	LR24145	LR24146	LR24147	LR24148	LR24149
Power (W)	44	45	45	45	45
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color Temp. (ANSI)	3000K	3500K	4000K	5000K	6500K
CRI (Ra)	80	80	80	80	80
Typical Lumens (lm)	4400	4725	4725	4725	4725
Efficacy (LPW)	100	105	105	105	105
Beam Angle	120°	120°	120°	120°	120°
Dimmable 0-10V	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
THD	<15%	<15%	<15%	<15%	<15%
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime - L70 (Hrs)	45.7	45.7	45.7	45.7	45.7
Dimensions (LxWxH)	47.7"x11.8"x0.38"	47.7"x11.8"x0.38"	47.7"x11.8"x0.38"	47.7"x11.8"x0.38"	47.7"x11.8"x0.38"
DLC Listed 	Yes	Yes	Yes	Yes	Yes

SPECIFICATIONS

2x2 Flat Panels


Item Description	LED45W2X2PANEL/30K/DIM	LED45W2X2PANEL/35K/DIM	LED45W2X2PANEL/40K/DIM	LED45W2X2PANEL/50K/DIM	LED45W2X2PANEL/65K/DIM
Model	LR24150	LR24151	LR24152	LR24153	LR24154
Power (W)	45	45	45	45	45
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color Temp. (ANSI)	3000K	3500K	4000K	5000K	6500K
CRI (Ra)	80	80	80	80	80
Typical Lumens (lm)	4550	4650	4700	4850	4850
Efficacy (LPW)	101.1	103.3	104.4	107.8	107.8
Beam Angle	120°	120°	120°	120°	120°
Dimmable 0-10V	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
THD	<15%	<15%	<15%	<15%	<15%
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime - L70 (Hrs)	45.7	45.7	45.7	45.7	45.7
Dimensions (LxWxH)	23.7"x23.7"x0.38"	23.7"x23.7"x0.38"	23.7"x23.7"x0.38"	23.7"x23.7"x0.38"	23.7"x23.7"x0.38"
DLC Listed 	Yes	Yes	Yes	Yes	Yes

SPECIFICATIONS


2x4 Flat Panels

Item Description	LED72W2X4PANEL/30K/DIM	LED72W2X4PANEL/35K/DIM	LED72W2X4PANEL/40K/DIM	LED72W2X4PANEL/50K/DIM	LED72W2X4PANEL/65K/DIM
Model	LR24155	LR24156	LR24157	LR24158	LR24159
Power (W)	72	72	72	72	72
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color Temp. (ANSI)	3000K	3500K	4000K	5000K	6500K
CRI (Ra)	80	80	80	80	80
Typical Lumens (lm)	8050	8150	8250	8550	8550
Efficacy (LPW)	111.8	113.2	114.6	118.8	118.8
Beam Angle	120°	120°	120°	120°	120°
Dimmable 0-10V	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9
THD	<15%	<15%	<15%	<15%	<15%
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime - L70 (Hrs)	45.7	45.7	45.7	45.7	45.7
Dimensions (LxWxH)	47.7" x 23.7" x 0.38"	47.7" x 23.7" x 0.38"	47.7" x 23.7" x 0.38"	47.7" x 23.7" x 0.38"	47.7" x 23.7" x 0.38"
DLC Listed 	Yes	Yes	Yes	Yes	Yes


DIMENSIONS

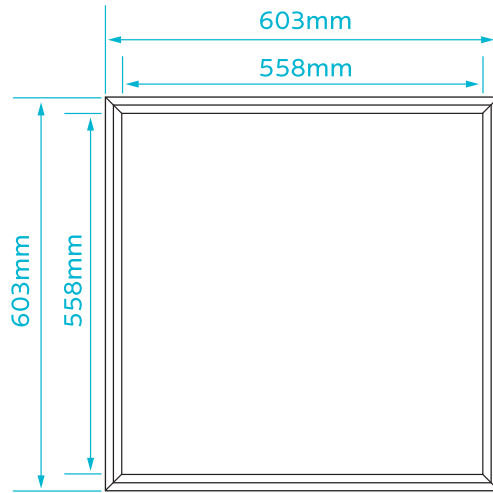

603mm * 603mm (2 * 2 ft)

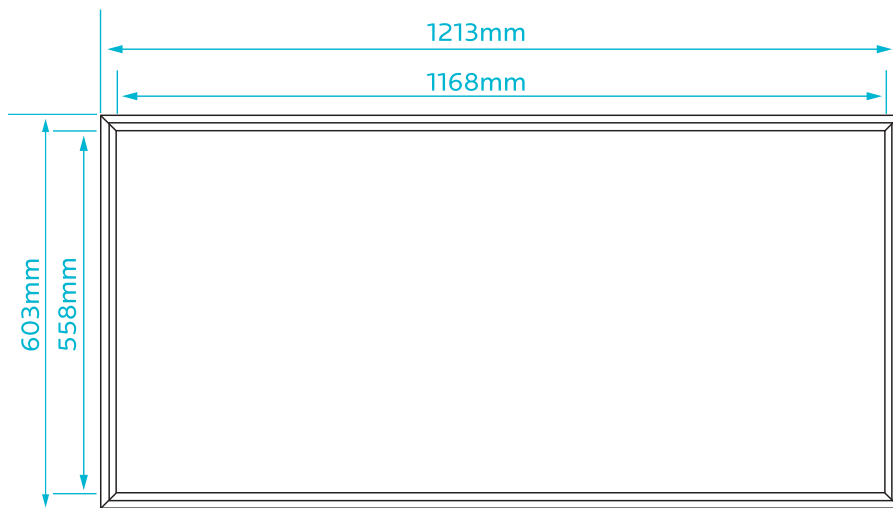

603mm * 1213mm (2 * 4 ft)

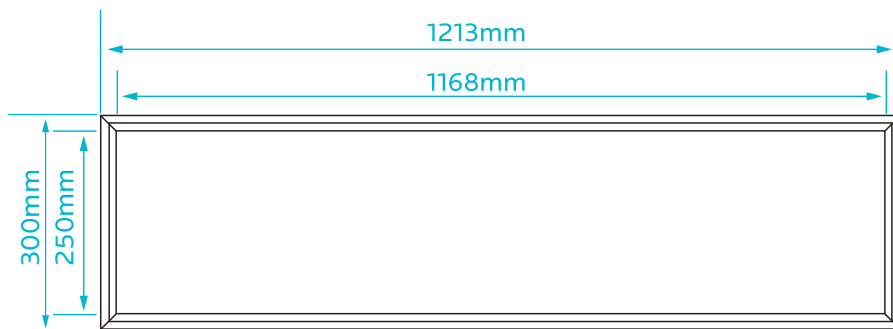

300mm * 1213mm (1 * 4ft)