


# HIGHLIGHTS

- Available in 3000K, 4000K, and 5000K
- Steel Housing + Acrylic Lens
- 120-277 Volt Input
- ETL Approved
- Easy Installation
- Damp Location Rated
- 25,000 Hour Life
- US based Quantum Lighting Technologies Driver & modules

# LUXRITE LED

LINEAR  
FIXTURE  
SHAPE

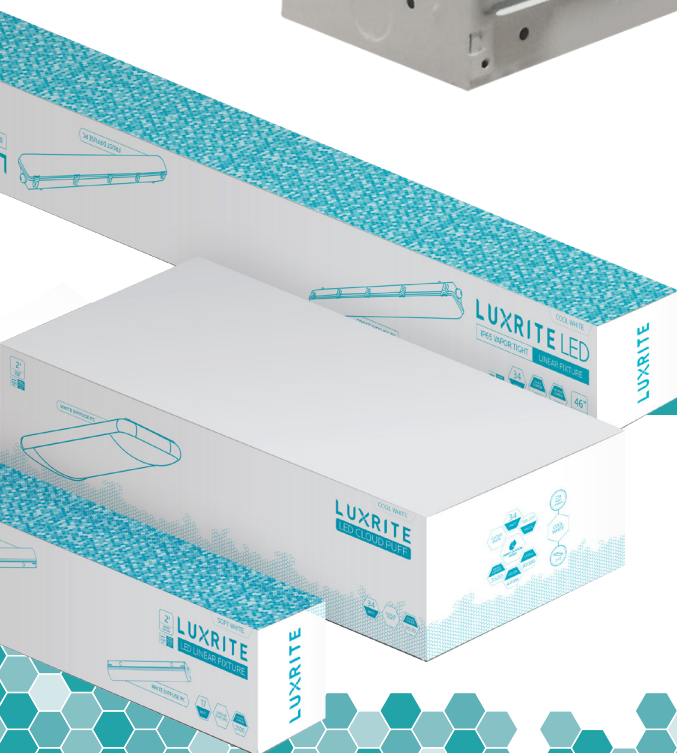

## MODULE & DRIVER MANUFACTURER WARRANTY

### 5-Year Life

Based on normal household usage  
(3 hours a day/7 days a week) in accordance  
with package and bulb directions.

Quantum Lighting Technologies  
Ontario, CA 91761

5 Year  
Warranty



# LUXRITE

## SPECIFICATIONS

| MODEL | FINISH           | MERCURY FREE                                                                        | DAMP LOCATION                                                                       |
|-------|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| ALL   | WHITE DIFFUSE PC |  |  |

| MODEL   | DESCRIPTION          | DIMENSION      | COLOR TEMPERATURE  | LUMENS | CRI | WATT | AVERAGE LIFETIME   | VOLTS   | LUMEN EFFICACY | ETL                                                                                   | DLC                                                                                   |
|---------|----------------------|----------------|--------------------|--------|-----|------|--------------------|---------|----------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| LR25120 | LED24/LINEAR/830/UNV | 24"L*5"W*3.3"H | 3000K SOFT WHITE   | 2100   | 80  | 17   | 25000hrs (22.8yrs) | 120-277 | 123.5          |    |    |
| LR25121 | LED24/LINEAR/840/UNV | 24"L*5"W*3.3"H | 4000K COOL WHITE   | 2100   | 80  | 17   | 25000hrs (22.8yrs) | 120-277 | 123.5          |    |    |
| LR25122 | LED24/LINEAR/850/UNV | 24"L*5"W*3.3"H | 5000K BRIGHT WHITE | 2100   | 80  | 17   | 25000hrs (22.8yrs) | 120-277 | 123.5          |    |    |
| LR25123 | LED36/LINEAR/830/UNV | 36"L*5"W*3.3"H | 3000K SOFT WHITE   | 3160   | 80  | 26   | 25000hrs (22.8yrs) | 120-277 | 121.5          |   |   |
| LR25124 | LED36/LINEAR/840/UNV | 36"L*5"W*3.3"H | 4000K COOL WHITE   | 3160   | 80  | 26   | 25000hrs (22.8yrs) | 120-277 | 121.5          |  |  |
| LR25125 | LED36/LINEAR/850/UNV | 36"L*5"W*3.3"H | 5000K BRIGHT WHITE | 3160   | 80  | 26   | 25000hrs (22.8yrs) | 120-277 | 121.5          |  |  |
| LR25126 | LED48/LINEAR/830/UNV | 48"L*5"W*3.3"H | 3000K SOFT WHITE   | 4200   | 80  | 34   | 25000hrs (22.8yrs) | 120-277 | 123.5          |  |  |
| LR25127 | LED48/LINEAR/840/UNV | 48"L*5"W*3.3"H | 4000K COOL WHITE   | 4200   | 80  | 34   | 25000hrs (22.8yrs) | 120-277 | 123.5          |  |  |
| LR25128 | LED48/LINEAR/850/UNV | 48"L*5"W*3.3"H | 5000K BRIGHT WHITE | 4200   | 80  | 34   | 25000hrs (22.8yrs) | 120-277 | 123.5          |  |  |
| LR25118 | LED96/LINEAR/840/UNV | 96"L*5"W*3.3"H | 4000K COOL WHITE   | 7040   | 80  | 68   | 30000hrs (27.4yrs) | 120-277 | 103.5          |  |                                                                                       |
| LR25119 | LED96/LINEAR/850/UNV | 96"L*5"W*3.3"H | 5000K BRIGHT WHITE | 7040   | 80  | 68   | 30000hrs (27.4yrs) | 120-277 | 103.5          |  |                                                                                       |

24"  
36"  
48"  
96"