


TROFFER

3 CCT CHANGE & WATTAGE SELECT


1X4, 2X2, 2X4

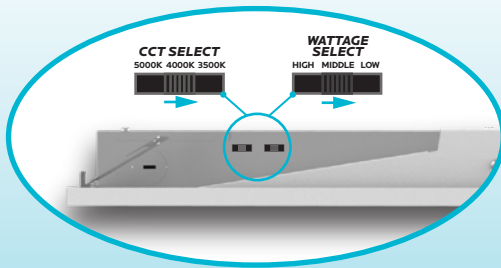

2x4



1x4

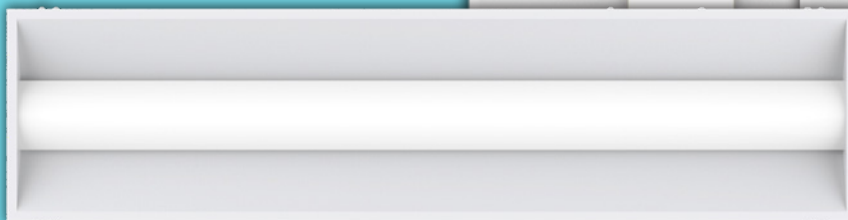

2x2



MAKEUP OF CCT & WATTAGE SELECT TROFFER

FRONT VIEW




BACK VIEW



SIDE MOUNT DRIVER & LOW VOLTAGE BOX FOR DIM +/-, LED +/- WIRES

MOUNTING BRACKETS

SIDE VIEW

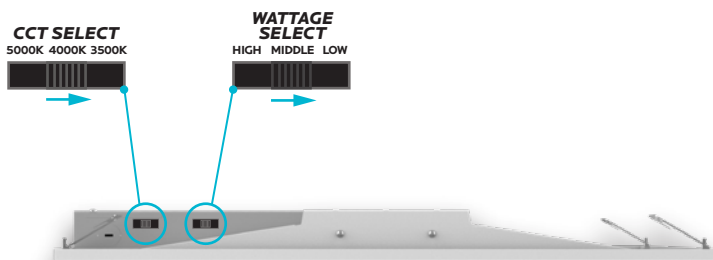

CCT SELECT
5000K 4000K 3500K

WATTAGE SELECT
HIGH MIDDLE LOW

EM OPTION AVAILABLE



EMERGENCY DRIVER

MODEL

DESCRIPTION

LR35122

LED/EMR/8-15W/DC/FC/E

SPECIFICATIONS

ELECTRICAL


	MODEL	DESCRIPTION	POWER	LUMEN	EFFICACY	INPUT VOLTS	DIMMABLE	FREQUENCY	LIFETIME
1X4	LR25135	LED1X4TROF/CB/3WO/3CCT/D	16W	2000	125	120-277V	0-10V	50/60Hz	50,000
			20W	2500					
			30W	3750					
2X2	LR25136	LED2X2TROF/CB/3WO/3CCT/D	20W	2500	125	120-277V	0-10V	50/60Hz	50,000
			30W	3750					
			40W	5000					
2X4	LR25137	LED2X4TROF/CB/3WO/3CCT/D	30W	3750	125	120-277V	0-10V	50/60Hz	50,000
			40W	5000					
			50W	6250					

PHOTOMETRIC


MODEL	COLOR (CCT)	TEMP	CRI	OPERATING TEMP.	CASE SIZE	IP RATING	UL LISTED
LR25135	3500K/4000K/5000K	NATURAL/COOL/BRIGHT	80	-4° - 113°	2	IP-20	YES
LR25136	3500K/4000K/5000K	NATURAL/COOL/BRIGHT	80	-4° - 113°	2	IP-20	YES
LR25137	3500K/4000K/5000K	NATURAL/COOL/BRIGHT	80	-4° - 113°	2	IP-20	YES

GENERAL


DIMENSIONS

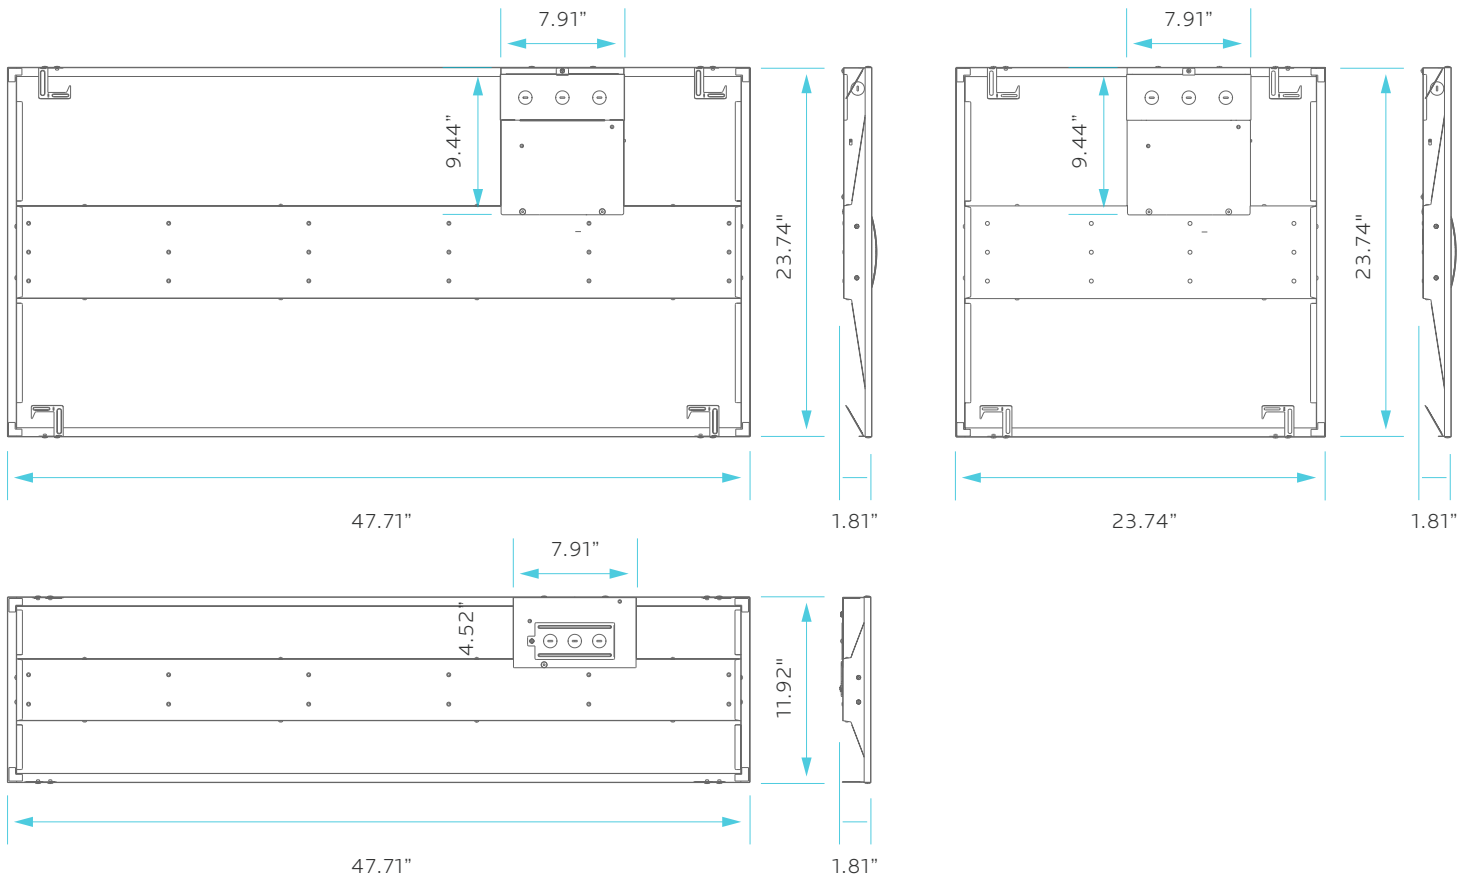

WIRING DIAGRAM

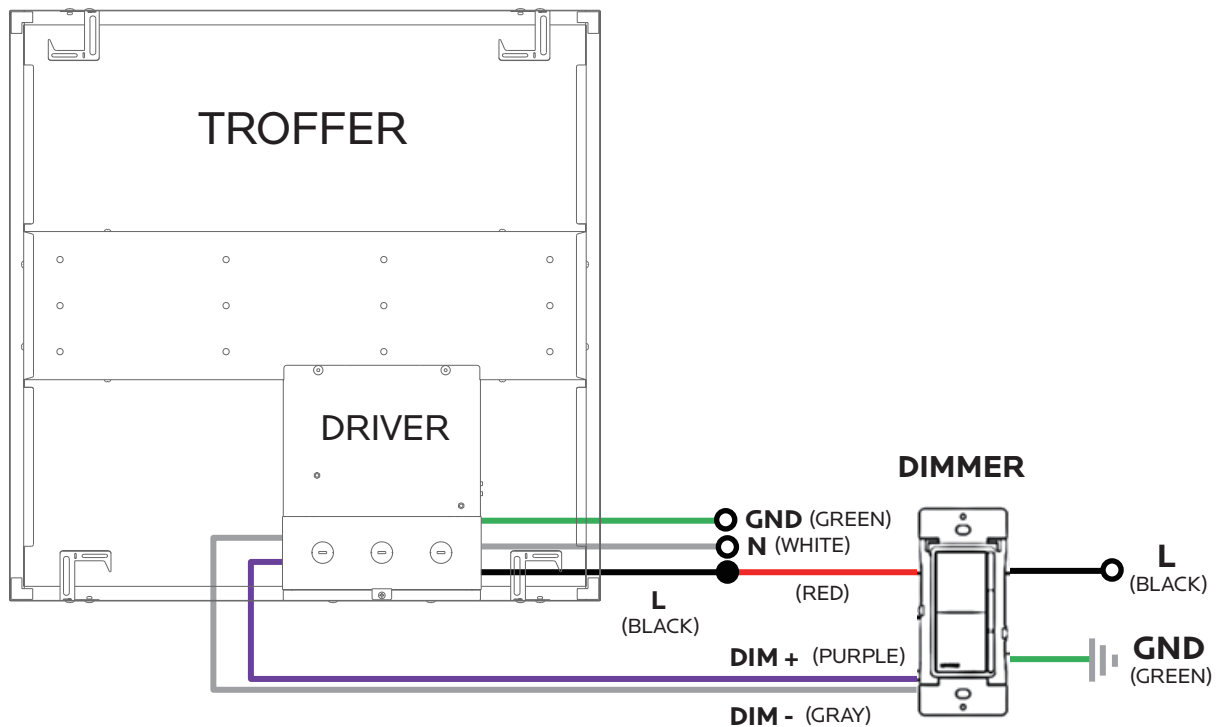

CCT & POWER SWITCH

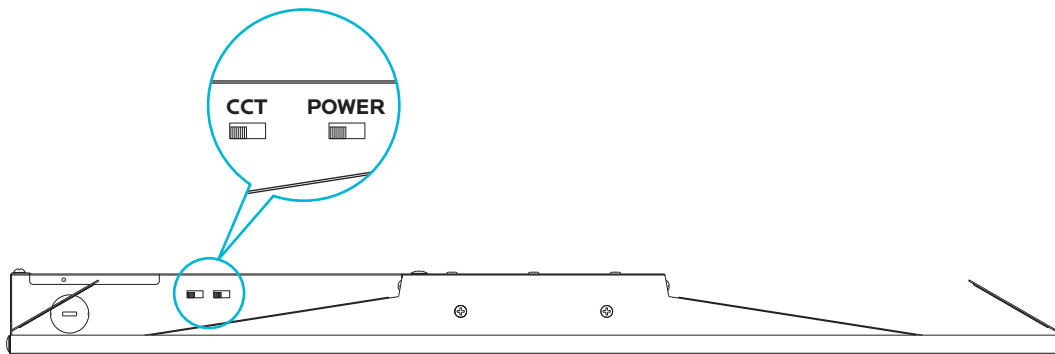

1X4 TROFFER

3500K	16W
4000K	20W
5000K	30W

2X2 TROFFER

3500K	20W
4000K	30W
5000K	40W

2X4 TROFFER

3500K	30W
4000K	40W
5000K	50W