



LED LINEAR STRIP SLIM - HIGH OUTPUT 24", 36" - CCT SELECT

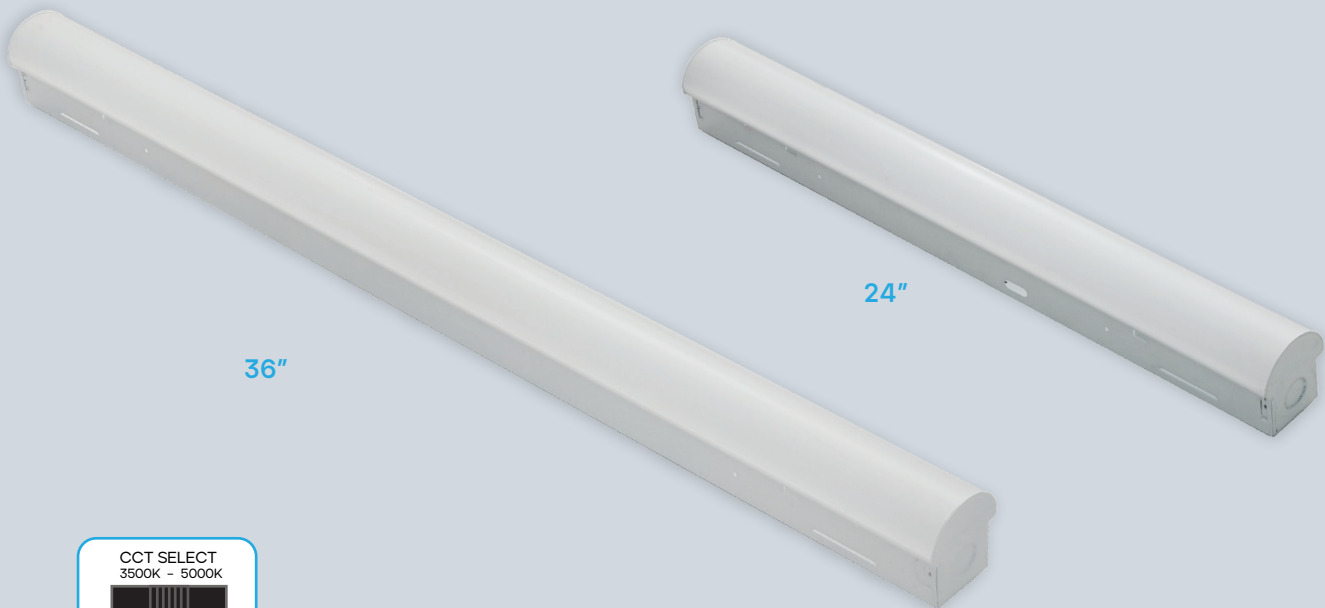

CCT SELECT SWITCH
ON THE SIDE

EMERGENCY OPTION
ALSO AVAILABLE

LR25181+EM
LR25183+EM



**CRI
80**

COLOR SELECTABLE


3500K 4000K 5000K


DIMMABLE

0-10V



*OPTION
AVAILABLE

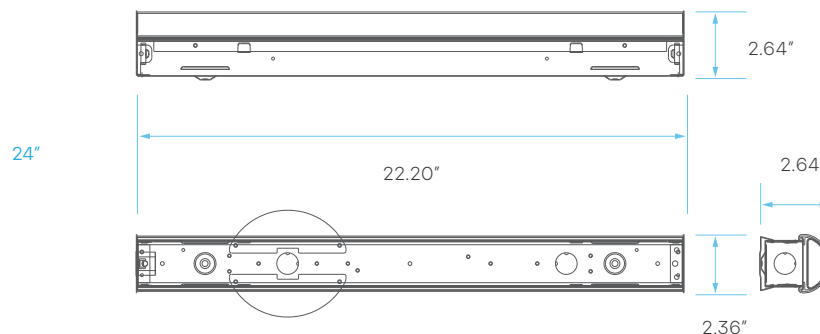

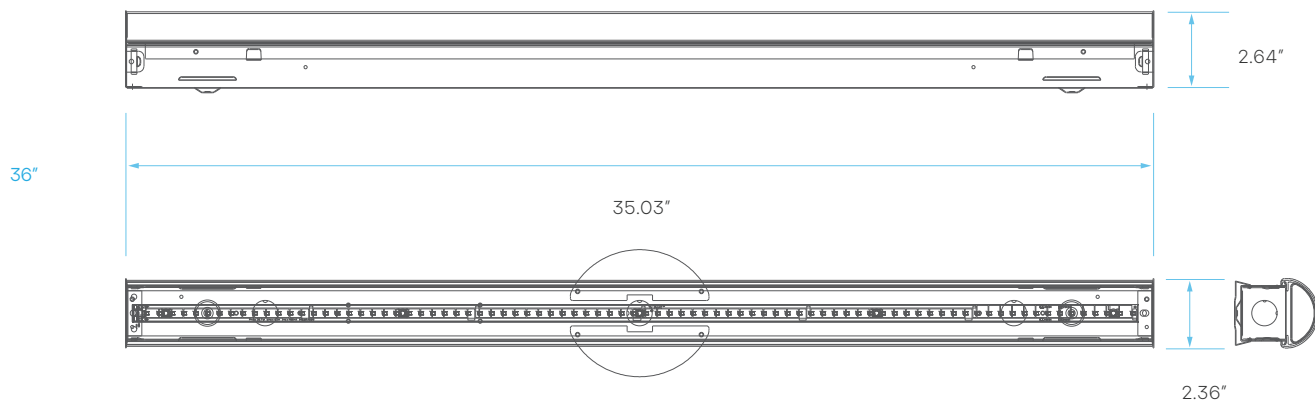

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR	EMERGENCY TIME
24"	LR25181	LED24/LINEAR/3CCT/UNV/D/HO	20	120-277V	130 @ 3500K	50,000	\$ 2.41	
					131 @ 4000K			
					132 @ 5000K			
	LR25181+EM	LED24/LINEAR/3CCT/UNV/D/HO+EM	20	120-277V	130 @ 3500K 131 @ 4000K 132 @ 5000K	50,000	\$ 2.41	90 MINS
36"	LR25183	LED36/LINEAR/3CCT/UNV/D/HO	25	120-277V	138 @ 3500K	50,000	\$ 3.01	
					139 @ 4000K			
					140 @ 5000K			
	LR25183+EM	LED36/LINEAR/3CCT/UNV/D/HO+EM	25	120-277V	138 @ 3500K 139 @ 4000K 140 @ 5000K	50,000	\$ 3.01	90 MINS

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL LISTED
LR25181	LED24/LINEAR/3CCT/UNV/D/HO	3500K/4000K/5000K	CCT SELECT	2600 @ 3500K	80	YES
				2620 @ 4000K		
				2640 @ 5000K		
LR25181+EM	LED24/LINEAR/3CCT/UNV/D/HO+EM	3500K/4000K/5000K	CCT SELECT	2600 @ 3500K	80	YES
				2620 @ 4000K		
				2640 @ 5000K		

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	UL LISTED
LR25183	LED36/LINEAR/3CCT/UNV/D/HO	3500K/4000K/5000K	CCT SELECT	3450 @ 3500K	80	YES
				3475 @ 4000K		
				3500 @ 5000K		
LR25183+EM	LED36/LINEAR/3CCT/UNV/D/HO+EM	3500K/4000K/5000K	CCT SELECT	3450 @ 3500K	80	YES
				3475 @ 4000K		
				3500 @ 5000K		

**COMPATIBLE
WITH:**


LR35120
LR35121
Emergency LED Driver



LR25176
SLIM LINEAR
PENDANT



LR25178
SLIM LINEAR
SUSPENSION KIT



LR35120, LR35121 - SPECIFICATIONS

MODEL	DESCRIPTION	EM POWER	INPUT VOLTS	FREQUENCY	INPUT CURRENT	INPUT POWER	OUTPUT VOLTAGE	RECHARGE TIME	EMERGENCY TIME
LR35120	LED/EMR/8W/DC	8	100-277V	50/60Hz	100mA	7W max	25-48VDC	24Hr	90min
LR35121	LED/EMR/15W/DC	15	100-277V	50/60Hz	100mA	7W max	25-48VDC	24Hr	90min

AMBIENT TEMPERATURE: 32°F ~ 104°F

WIRING DIAGRAM

