


## LED LAY IN

### CENTER BASKET TROFFER - 5CCT & 5 WATTAGE SELECT 2X2', 2X4'

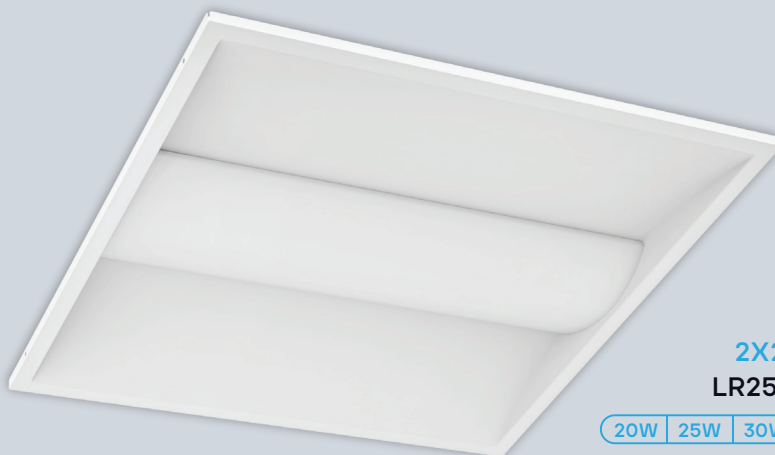

2X2'  
LR25311

20W | 25W | 30W | 35W | 40W



2X4'  
LR25312

30W | 40W | 50W | 60W | 72W

EMERGENCY OPTION  
ALSO AVAILABLE

LR25311+EM  
LR25312+EM



COLOR SELECTABLE

3000K | 3500K | 4000K | 5000K | 6000K

WATTAGE  
SELECTABLE

5 OPTIONS



120-  
277V



\*OPTION  
AVAILABLE





## ELECTRICAL

|     | MODEL      | DESCRIPTION                 | POWER | INPUT VOLTS | EFFICACY | LIFETIME | COST/YR | EMERGENCY TIME |
|-----|------------|-----------------------------|-------|-------------|----------|----------|---------|----------------|
| 2X2 | LR25311    | LED2X2TROF/CB/5WO/5CCT/D    | 20    | 120-277V    | 125      | 50,000   | \$ 4.81 |                |
|     |            |                             | 25    |             |          |          |         |                |
|     |            |                             | 30    |             |          |          |         |                |
|     |            |                             | 35    |             |          |          |         |                |
|     |            |                             | 40    |             |          |          |         |                |
|     |            |                             |       |             |          |          |         |                |
| 2X2 | LR25311+EM | LED2X2TROF/CB/5WO/5CCT/D+EM | 20    | 120-277V    | 125      | 50,000   | \$ 4.81 | 90 MINS        |
|     |            |                             | 25    |             |          |          |         |                |
|     |            |                             | 30    |             |          |          |         |                |
|     |            |                             | 35    |             |          |          |         |                |
|     |            |                             | 40    |             |          |          |         |                |
|     |            |                             |       |             |          |          |         |                |
| 2X4 | LR25312    | LED2X4TROF/CB/5WO/5CCT/D    | 30    | 120-277V    | 125      | 50,000   | \$ 8.67 |                |
|     |            |                             | 40    |             |          |          |         |                |
|     |            |                             | 50    |             |          |          |         |                |
|     |            |                             | 60    |             |          |          |         |                |
|     |            |                             | 72    |             |          |          |         |                |
|     |            |                             |       |             |          |          |         |                |
| 2X4 | LR25312+EM | LED2X4TROF/CB/5WO/5CCT/D+EM | 30    | 120-277V    | 125      | 50,000   | \$ 8.67 | 90 MINS        |
|     |            |                             | 40    |             |          |          |         |                |
|     |            |                             | 50    |             |          |          |         |                |
|     |            |                             | 60    |             |          |          |         |                |
|     |            |                             | 72    |             |          |          |         |                |
|     |            |                             |       |             |          |          |         |                |

## PHOTOMETRIC

| MODEL      | DESCRIPTION                 | COLOR (CCT)                    | TEMP       | FLOOD* | CRI | ETL | DLC LISTED |
|------------|-----------------------------|--------------------------------|------------|--------|-----|-----|------------|
| LR25311    | LED2X2TROF/CB/5WO/5CCT/D    | 3000K/3500K//4000K/5000K/6000K | CCT SELECT | 120°   | 80  | YES | S-9PTXPC   |
| LR25311+EM | LED2X2TROF/CB/5WO/5CCT/D+EM | 3000K/3500K//4000K/5000K/6000K | CCT SELECT | 120°   | 80  | YES | S-9PTXPC   |
| LR25312    | LED2X4TROF/CB/5WO/5CCT/D    | 3000K/3500K//4000K/5000K/6000K | CCT SELECT | 120°   | 80  | YES | S-3LP1DQ   |
| LR25312+EM | LED2X4TROF/CB/5WO/5CCT/D+EM | 3000K/3500K//4000K/5000K/6000K | CCT SELECT | 120°   | 80  | YES | S-3LP1DQ   |

## DIMENSIONS

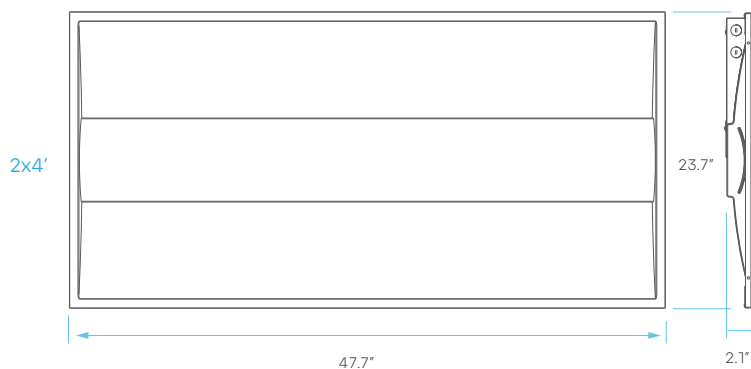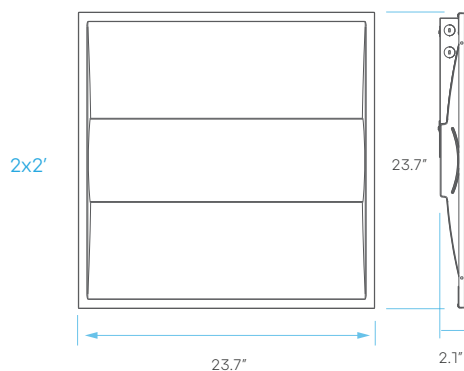



## LR35126 - SPECIFICATIONS

| MODEL   | DESCRIPTION         | EM POWER | INPUT VOLTS | FREQUENCY | INPUT CURRENT | INPUT POWER | OUTPUT VOLTAGE | RECHARGE TIME | EMERGENCY TIME |
|---------|---------------------|----------|-------------|-----------|---------------|-------------|----------------|---------------|----------------|
| LR35126 | LED/EMR/15W/AC/SF/E | 15       | 100-347V    | 50/60Hz   | 100mA         | 12W max     | 170V DC        | 24Hr          | 90min          |

AMBIENT TEMPERATURE: 41°F ~ 122°F

## LR35126 - WIRING DIAGRAM

1. For LED luminaires with 0-10V dimmable LED driver (\*LED Driver input power <100W) Emergency Driver Dim+ (Green), Driver Dim- (Yellow) has to connect with LED Driver DIM+ and DIM-.

