

LED LINEAR STRIP

LINEAR - 5CCT & 4 WATTAGE SELECT

24", 48", 96" - VERY HIGH OUTPUT - SENSOR READY



24"

LR25360

13W 17W 21W 26W

EMERGENCY OPTION
ALSO AVAILABLE

LR25360+EM



48"

LR25364

40W 47W 53W 68W

EMERGENCY OPTION
ALSO AVAILABLE

LR25364+EM




96"

LR25366

80W 94W 106W 136W

EMERGENCY OPTION
ALSO AVAILABLE

LR25366+EM

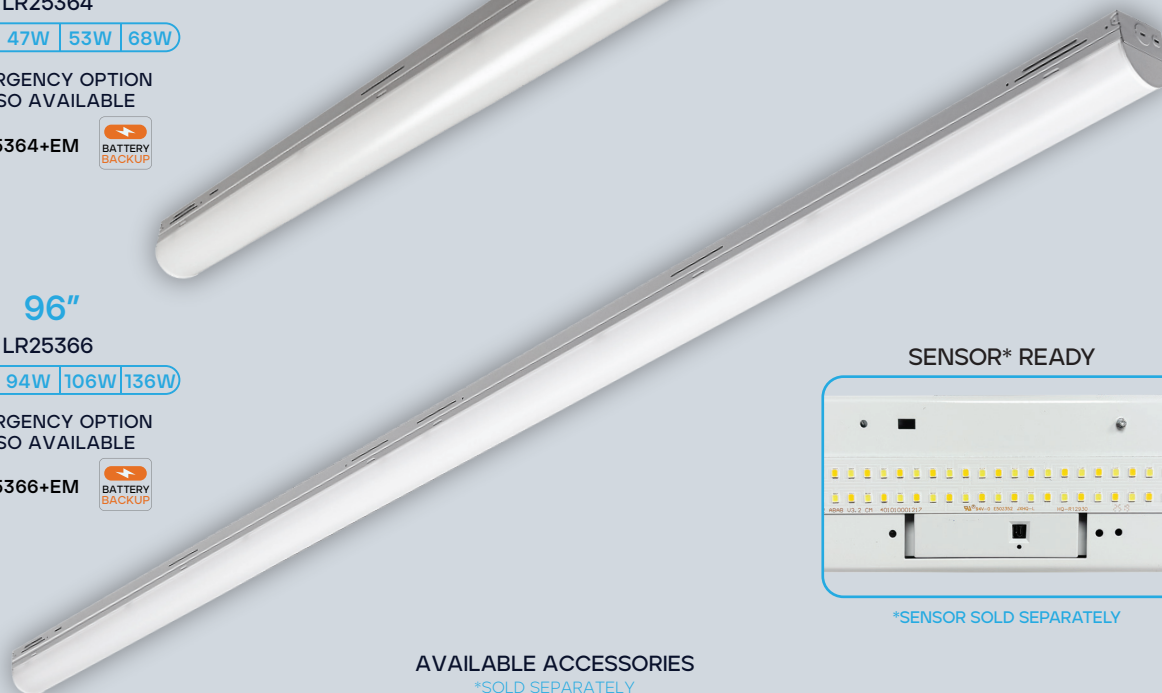

SENSOR* READY




*SENSOR SOLD SEPARATELY


AVAILABLE ACCESSORIES

*SOLD SEPARATELY

LR25367
4' REFLECTOR



LR25371
4' REFLECTOR
STRAIGHT



LR25369
SUSPENSION
MOUNT KIT



LR25370
CHAIN KIT



LR25368
STRAIGHT
CONNECTOR



CRI
80

COLOR SELECTABLE

3000K 3500K 4000K 5000K 6500K

WATTAGE
SELECTABLE

4 OPTIONS

BATTERY
BACKUP

*OPTION
AVAILABLE

SENSOR
READY

DIMMABLE
0-10V

120-
277V

HIGH
OUTPUT

DAMP
LOCATION
RATED

5
YEAR
WARRANTY

ELECTRICAL

	MODEL	DESCRIPTION	INPUT VOLTS	POWER	LUMEN	EFFICACY	LIFETIME	EMERGENCY TIME
24"	LR25360	LED24/LINEAR/5CCT/4WO/UNV/D/VHO	120-277V	13	2,000	150	50,000	
				17	2,500			
				21	3,000			
				26	4,000			
	LR25360+EM	LED24/LINEAR/5CCT/4WO/UNV/D/VHO+EM	120-277V	13	2,000	150	50,000	90 MINS
				17	2,500			
				21	3,000			
				26	4,000			
48"	LR25364	LED48/LINEAR/5CCT/4WO/UNV/D/VHO	120-277V	40	6,000	150	50,000	
				47	7,000			
				53	8,000			
				68	10,000			
	LR25364+EM	LED48/LINEAR/5CCT/4WO/UNV/D/VHO+EM	120-277V	40	6,000	150	50,000	90 MINS
				47	7,000			
				53	8,000			
				68	10,000			
96"	LR25366	LED96/LINEAR/5CCT/4WO/UNV/D/VHO	120-277V	80	13,000	150	50,000	
				94	15,000			
				106	16,000			
				136	20,000			
	LR25366+EM	LED96/LINEAR/5CCT/4WO/UNV/D/VHO+EM	120-277V	80	13,000	150	50,000	90 MINS
				94	15,000			
				106	16,000			
				136	20,000			


PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	CRI	UL	DLC LISTED
LR25360	LED24/LINEAR/5CCT/4WO/UNV/D/VHO	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	STANDARD S-RF7TVD
LR25360+EM	LED24/LINEAR/5CCT/4WO/UNV/D/VHO+EM	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	
LR25364	LED48/LINEAR/5CCT/4WO/UNV/D/VHO	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	PREMIUM S-1XP54S
LR25364+EM	LED48/LINEAR/5CCT/4WO/UNV/D/VHO+EM	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	
LR25366	LED96/LINEAR/5CCT/4WO/UNV/D/VHO	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	PREMIUM S-VBB1DX
LR25366+EM	LED96/LINEAR/5CCT/4WO/UNV/D/VHO+EM	3000K/3500K/4000K/5000K/6500K	CCT SELECT	80	YES	


ACCESSORIES

*SOLD SEPARATELY

LR25367
4' REFLECTOR



LR25371
4' REFLECTOR
STRAIGHT



INSTALLED
ON LR25366
(*NEEDS 2 PCS)



LR25368
STRAIGHT
CONNECTOR



LR25369
SUSPENSION
MOUNT KIT




LR25370
CHAIN KIT



SENSOR COMPATIBILITY


LR25372
AUDIO JACK
STANDARD SENSOR

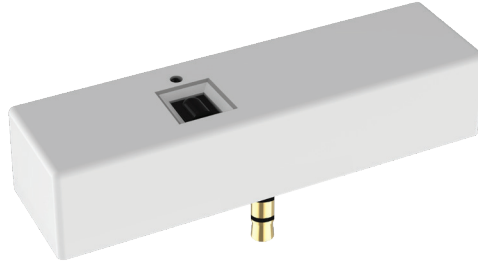

WORKS WITH:
LR25189
MW BI-LEVEL
REMOTE




SENSOR* READY

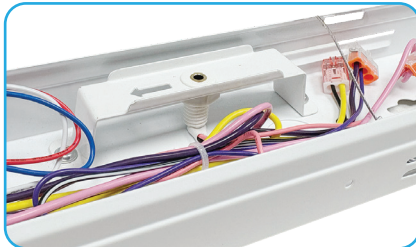

*SENSOR SOLD SEPARATELY

SENSOR INSTALLED

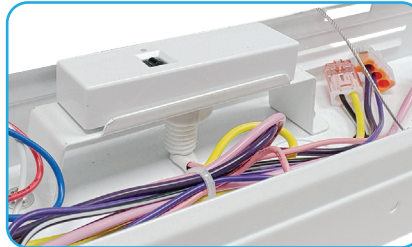


MOTION SENSOR - SPECIFICATIONS

MODEL	DESCRIPTION	POWER	INPUT VOLTS	DIMMING	INSTALL HEIGHT	DETECTION RANGE	DETECTION ANGLE
LR25372	LEDSNS/LINEAR/MW/BILEVEL/1P	<0.3W	12V	0-10V	13.12FT	9FT	30-150°


AMBIENT TEMPERATURE: -13°F ~ 140°F

SENSOR PARAMETER	Detection Area	25%/50%/75%/100%
	Holdtime	Remote control Options : 5s/ 30s/ 1min/ 3min/ 5min/ 10min/ 20min/ 30min APP Control Options : 5s/ 30s/ 1min/ 2min/ 3min/ 5min/ 10min/ 15min/ 20min/ 25min/30min/ 45min/ 60min/ 90min/ 120min
	Daylight Threshold	Disable/400Lux/350Lux/300Lux/250Lux/200Lux/120Lux/ 80Lux/50Lux/30Lux/10Lux/2Lux
	Standby Dimming Level	10%/20%/30%/50%
	Standby Period	Remote control Options : 0s/ 10s/ 30s/ 1min/ 5min/ 10min/ 30min/ 60min/+∞ APP Control Options : 0s/5s/30s/1min/2min/3min/5min/10min/15min/20min/ 25min/30min/45min/60min/+∞
	Dusk/Dawn Sensing/ Photocell	Daylight threshold as 30lux/ 50lux/ 80lux/ 120lux/ 200Lux/ 250Lux/300Lux/ 350Lux/ 400Lux Standby period as +∞ ; Standby dimming level as 10%/20%/30%
	Daylight Harvesting	1. Adjust "daylight" value higher than 50lux 2. Preset "standby period" 0S 3. Press MW/PIR button 3 times till MW/PIR icons both blinking on LCD screen, daylight harvesting function enabled. (With BLE version, press DH button, daylight harvesting function enabled.)


DIMENSIONS

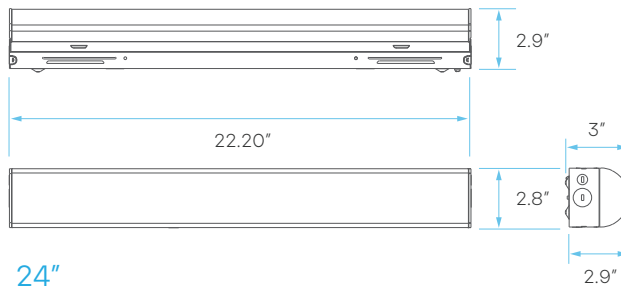

24"

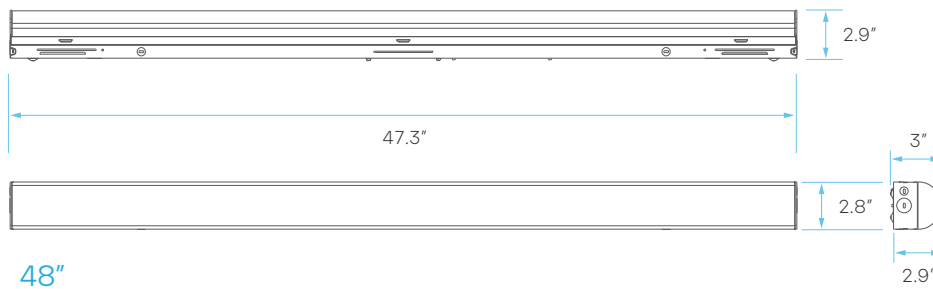

48"

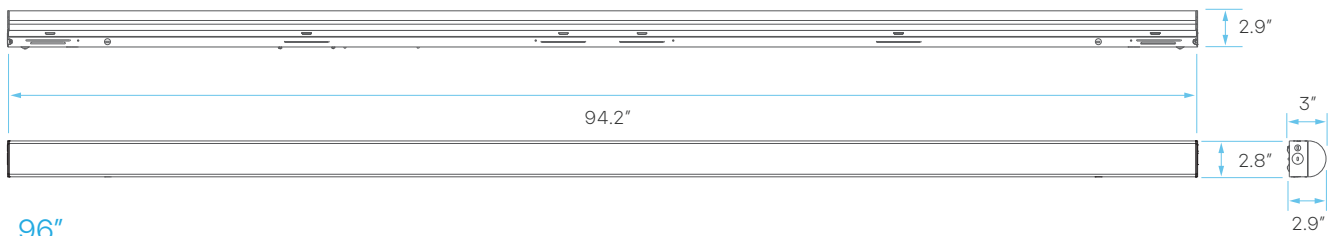

96"