

LED SPOTLIGHT-CANLESS MULTIPLE - MULTILIGHT 1, 2, & 3 HEAD



1 HEAD (12W)



2 HEAD (24W)



3 HEAD (36W)



5 CCT SWITCH
THE BACK



360° ROTATION

15° TILT



COLOR SELECTABLE

2700K 3000K 3500K 4000K 5000K

DIMMABLE



TRIAC

AIR
TIGHT


IC
RATED

WET
LOCATION
RATED


3
YEAR
WARRANTY




1 HEAD CUTOUT: Ø 3.75"

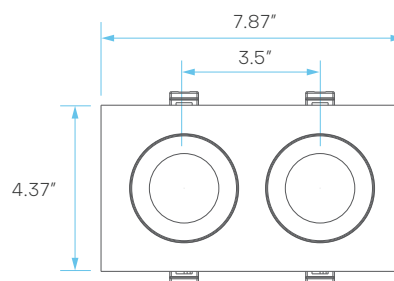

2 HEAD CUTOUT: 7.25" X 3.75"

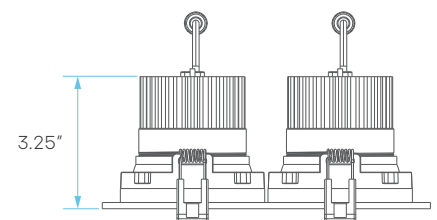

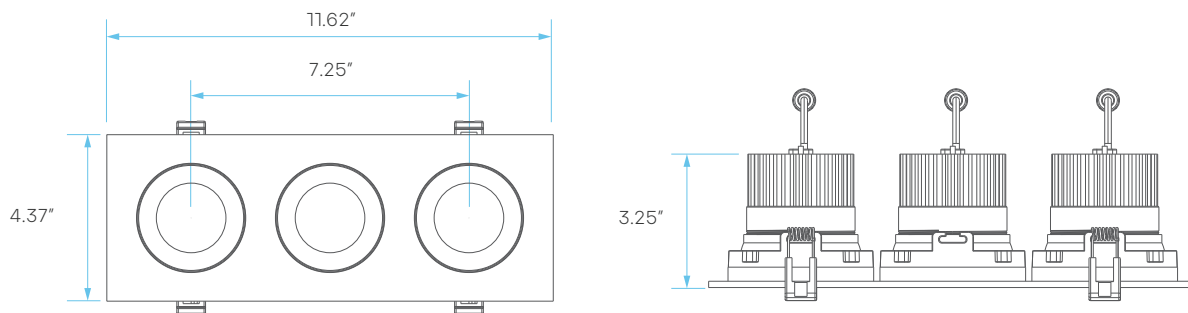

3 HEAD CUTOUT: 10.82" X 3.75"

ELECTRICAL

	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR
1 HEAD	LR32180	LEDMHDL1/5CCT/9/G	12	120V	67	50,000	\$ 1.45
2 HEAD	LR32183	LEDMHDL3/5CCT/9/G	24	120V	58	50,000	\$ 2.89
3 HEAD	LR32185	LEDMHDL4/5CCT/9/G	36	120V	58	50,000	\$ 4.34

PHOTOMETRIC


MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	CRI	FLOOD	ETL	PLATE (KNOCKOUT)
LR32180	LEDMHDL1/5CCT/9/G	2700K/3000K/3500K/4000K/5000K	CCT SELECT	800	90	40°	YES	LR41004 (#2)
LR32183	LEDMHDL3/5CCT/9/G	2700K/3000K/3500K/4000K/5000K	CCT SELECT	1400	90	40°	YES	LR41007 (#0)
LR32185	LEDMHDL4/5CCT/9/G	2700K/3000K/3500K/4000K/5000K	CCT SELECT	2100	90	40°	YES	LR41007 (#1)

COMPATIBLE
WITH:

LR35123
LR35124
Emergency LED Driver



LR41004
New Construction
Mounting Plate



KNOCKOUTS

KNOCKOUT SIZE	
#0	Ø2.125" (Ø54 mm)
#1	Ø2.83" (Ø72 mm)
#2	Ø3.75" (Ø95 mm)
#3	Ø5.19" (Ø132 mm)

LR41007
New Construction
Mounting Plate



KNOCKOUTS

KNOCKOUT SIZE	
#0	7.36"x3.74" (187x95mm)
#1	10.82"x3.74" (275x95 mm)