

HIGHLIGHTS

- UL listed
- Easy installation and replacement
- Choice of CCT:
4000k, 5000k, 6500k
- Available in 8ft, 6ft
- 50,000hr extra-long life
- Best alternative to fluorescent tube

LUXRITE LED

6' & 8'
LED TUBE
SHAPE



3 Year
Warranty



DIRECT
REPLACEMENT

LUXRITE

SPECIFICATIONS

MODEL	CASE	GLASS	CRI	AVERAGE LIFETIME	INPUT VOLTS	POWER FACTOR	FREQUENCY
ALL	25	FROST	80	50000hrs (45.7yrs)	100-277	0.9	50-60Hz


MODEL	DESCRIPTION	SUB TYPE	BASE	WATT	LUMENS	FLOOD	COLOR TEMPERATURE	MOL	LUMEN EFFICIENCY	UL LISTED DIRECT REPLACEMENT
LR34030	LED29T8/40K/72	BYPASS	G13	29	2900	120°	4000K COOL WHITE	1800mm	100.0	
LR34040	LED36T8/40K/96	BYPASS+DIRECT	FA8	36	3600	120°	4000K COOL WHITE	2367mm	100.0	UL
LR34041	LED36T8/50K/96	BYPASS+DIRECT	FA8	36	3600	120°	5000K BRIGHT WHITE	2367mm	100.0	UL
LR34042	LED36T8/65K/96	BYPASS+DIRECT	FA8	36	3600	120°	6500K DAYLIGHT	2367mm	100.0	UL

BYPASS+DIRECT | 8ft.

Working with Ballast



Directly AC Input

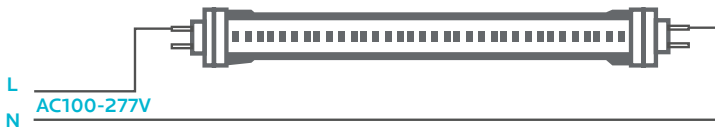

BYPASS | 6ft.

Directly AC Input

