

LED LINEAR FIXTURE

ARCHITECTURAL LINKABLE LINEAR 3CCT/3 WATTAGE/ UP-DOWN SELECTABLE

24", 48", 72", 96" - BLACK & WHITE FINISH



↑ 30/70 ↓ UP/DOWN
↑ 10/90 ↓ LIGHT
100% ↓ DISTRIBUTION
OPTIONS

3 CCT SELECT

3 WATTAGE SELECT

WHITE
FINISH

BLACK
FINISH

INCLUDED IN BOX



STRAIGHT LINK
BRACKET (1)




SUSPENSION KIT &
CANOPY KIT
BLACK/WHITE




5FT POWER FEED
BLACK/WHITE

MULTIPLE CONNECTOR & MOUNTING OPTIONS AVAILABLE




LINKABLE
V60° CONNECTOR

LR42626 LR42627
WHITE FINISH BLACK FINISH



LINKABLE
V120° CONNECTOR

LR42628 LR42629
WHITE FINISH BLACK FINISH




LINKABLE
X-CONNECTOR

LR42620 LR42621
WHITE FINISH BLACK FINISH



LINKABLE
L-CONNECTOR

LR42622 LR42623
WHITE FINISH BLACK FINISH



LINKABLE
T-CONNECTOR

LR42624 LR42625
WHITE FINISH BLACK FINISH

LINKABLE 4", 6", 9", 12" CONNECTOR

LR42617 LR42618
LR42600 LR42601
LR42602 LR42603
LR42607 LR42608
WHITE FINISH BLACK FINISH

24"

LR42605
WHITE FINISH
LR42606
LR42606+EM*
BLACK FINISH

48"

LR42610
LR42610+EM*
WHITE FINISH
LR42611
LR42611+EM*
BLACK FINISH

72"

LR42612
WHITE FINISH
LR42613
BLACK FINISH

96"

LR42615
LR42615+EM
WHITE FINISH
LR42616
LR42616+EM
BLACK FINISH



COLOR SELECTABLE

3500K 4000K 5000K

WATTAGE SELECTABLE

3 OPTIONS

DIMMABLE

0-10V

EM READY

UP-DOWN LIGHT DISTRIBUTION

*OPTION AVAILABLE

120- 277V

DAMP LOCATION RATED

BEAM SPREAD 120°

5 YEAR WARRANTY

ELECTRICAL

		MODEL	DESCRIPTION	POWER	LUMEN	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR	EMERGENCY TIME
24"	WHITE	LR42605	ARCHL24/3CCT/3WO/WT/UPDN	15	1725	120-277V	115	50,000	\$ 3.01	
				20	2300					
				25	2875					
	BLACK	LR42606	ARCHL24/3CCT/3WO/BK/UPDN	15	1725	120-277V	115	50,000	\$ 3.01	
				20	2300					
				25	2875					
48"	WHITE	LR42610	ARCHL48/3CCT/3WO/WT/UPDN	15	1725	120-277V	115	50,000	\$ 3.01	90 MINS
				20	2300					
				25	2875					
	BLACK	LR42611	ARCHL48/3CCT/3WO/BK/UPDN	15	1725	120-277V	115	50,000	\$ 3.01	90 MINS
				20	2300					
				25	2875					
72"	WHITE	LR42612	ARCHL72/3CCT/3WO/WT/UPDN	30	3540	120-277V	115	50,000	\$ 6.02	
				40	4600					
				50	5750					
	BLACK	LR42613	ARCHL72/3CCT/3WO/BK/UPDN	30	3540	120-277V	115	50,000	\$ 6.02	90 MINS
				40	4600					
				50	5750					
96"	WHITE	LR42615	ARCHL96/3CCT/3WO/WT/UPDN	30	3540	120-277V	115	50,000	\$ 6.02	90 MINS
				40	4600					
				50	5750					
	BLACK	LR42616	ARCHL96/3CCT/3WO/BK/UPDN	30	3540	120-277V	115	50,000	\$ 6.02	90 MINS
				40	4600					
				50	5750					


ELECTRICAL

	MODEL	DESCRIPTION	POWER	LUMEN	INPUT VOLTS	EFFICACY	LIFETIME	COST/YR	EMERGENCY TIME
96"	BLACK LR42616+EM	ARCHL96/3CCT/3WO/BK/UPDN+EM	50	5750	120-277V	115	50,000	\$ 9.63	90 MINS
			64	7360					
			80	9200					


PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	FLOOD	CRI	UL LISTED	DLC LISTED
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-69P3BL
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-69P3BL
LR42606+EM	ARCHL24/3CCT/3WO/BK/UPDN+EM	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-69P3BL
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-PRT06N
LR42610+EM	ARCHL48/3CCT/3WO/WT/UPDN+EM	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-PRT06N
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-PRT06N
LR42611+EM	ARCHL48/3CCT/3WO/BK/UPDN+EM	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-PRT06N
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-QXRDDK
LR42615+EM	ARCHL96/3CCT/3WO/WT/UPDN+EM	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-QXRDDK
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-QXRDDK
LR42616+EM	ARCHL96/3CCT/3WO/BK/UPDN+EM	3500K/4000K/5000K	CCT SELECT	120°	80	YES	S-QXRDDK


WIRING

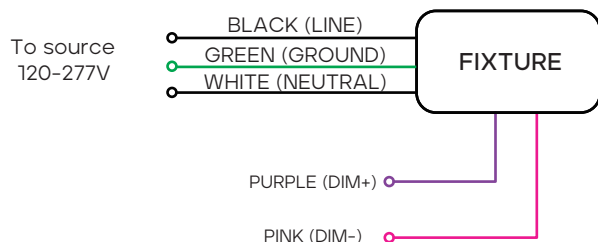


3CCT/WATTAGE/UP-DOWN SWITCH

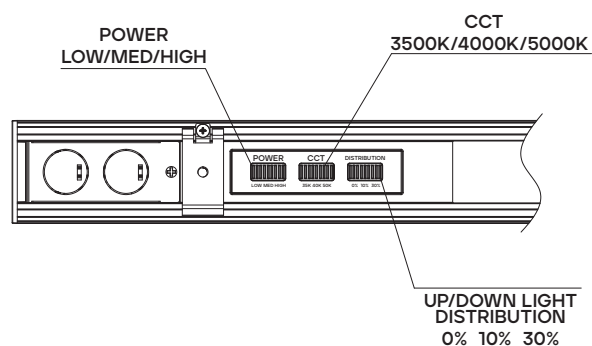

DIMENSIONS

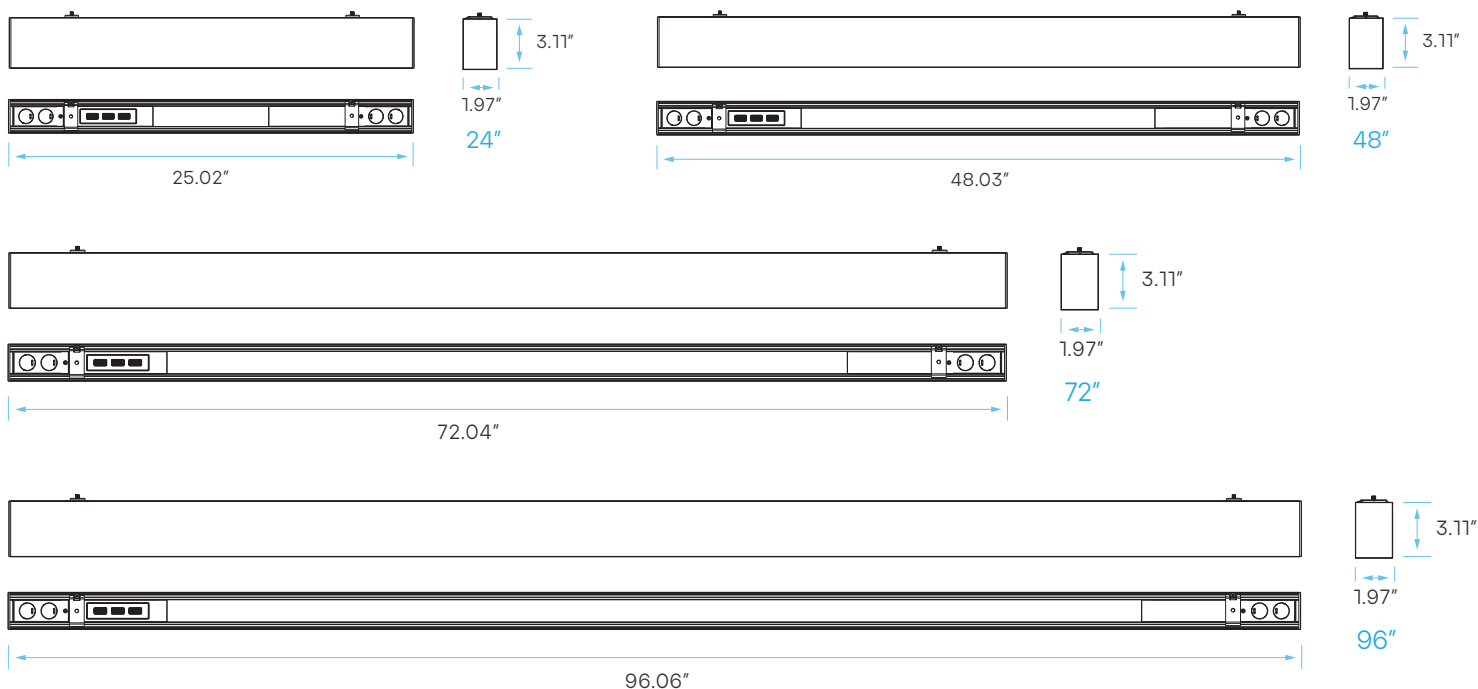

LINKABLE INSTALLATION

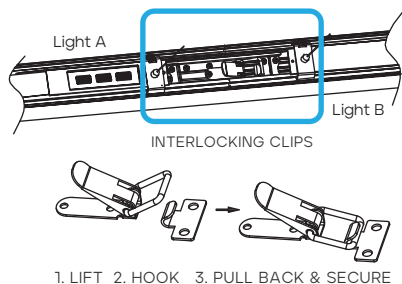

***PLEASE NOTE:**
Under 120V line voltage, connect up to maximum of 40'. If the linking length is over 24', please use the roll out lens LR42644, LR42645 for seamless connection.
Under 277V line voltage, connect up to maximum of 100'. If the linking length is over 24', please use the roll out lens LR42644, LR42645 for seamless connection.

ARCHITECTURAL LINEAR MAX RUN

MODEL	WATTAGE	120V	277V
LR42605	<25W	16 PCS	40 PCS
LR42606	<25W	16 PCS	40 PCS
LR42610	<50W	8 PCS	20 PCS
LR42611	<50W	8 PCS	20 PCS
LR42612	<60W	6 PCS	16 PCS
LR42613	<60W	6 PCS	16 PCS
LR42615	<80W	6 PCS	10 PCS
LR42616	<80W	6 PCS	10 PCS

"V60" CONNECTOR OPTIONS

*SOLD SEPARATELY



LR42626


LR42627

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42626	ARCHL-V60/3CCT/3WO/WT	V60° CONNECTOR
LR42627	ARCHL-V60/3CCT/3WO/BK	V60° CONNECTOR


MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

WORKS WITH:

DIMENSIONS

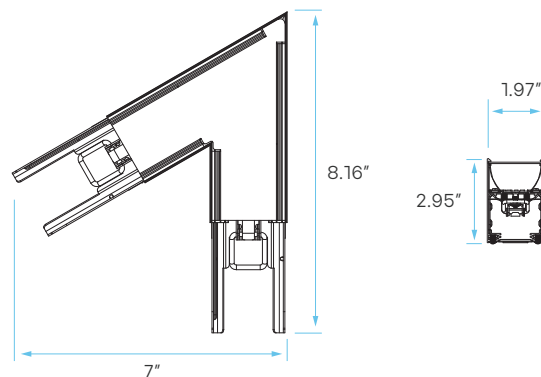

INSTALLATION



"V120" CONNECTOR OPTIONS

*SOLD SEPARATELY



LR42628


LR42629

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42628	ARCHL-V120/3CCT/3WO/WT	V120° CONNECTOR
LR42629	ARCHL-V120/3CCT/3WO/BK	V120° CONNECTOR


MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

WORKS WITH:

DIMENSIONS

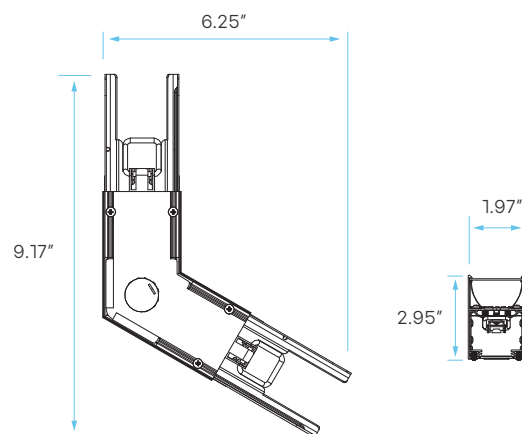


INSTALLATION

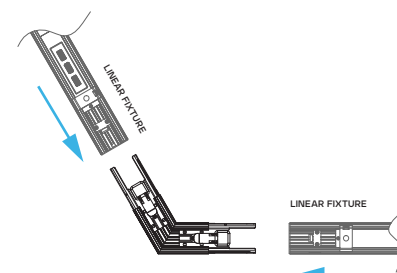

"X" CONNECTOR OPTIONS

*SOLD SEPARATELY



LR42620




LR42621

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42620	ARCHL-X/3CCT/3WO/WT	X-CONNECTOR
LR42621	ARCHL-X/3CCT/3WO/BK	X-CONNECTOR


WORKS WITH:

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

DIMENSIONS

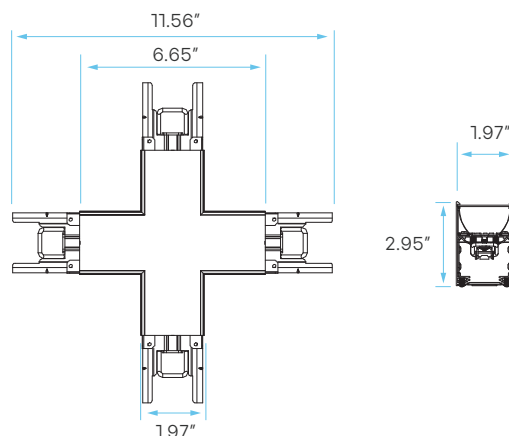

INSTALLATION



"L" CONNECTOR OPTIONS

*SOLD SEPARATELY



LR42622




LR42623

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42622	ARCHL-L/3CCT/3WO/WT	L-CONNECTOR
LR42623	ARCHL-L/3CCT/3WO/BK	L-CONNECTOR


WORKS WITH:

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

DIMENSIONS

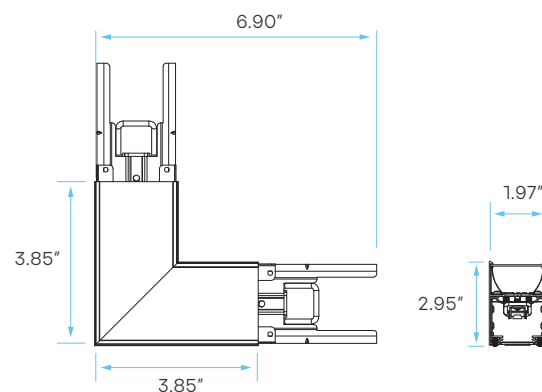


INSTALLATION




"T" CONNECTOR OPTIONS

*SOLD SEPARATELY



LR42624




LR42625

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42624	ARCHL-T/3CCT/3WO/WT	T-CONNECTOR
LR42625	ARCHL-T/3CCT/3WO/BK	T-CONNECTOR


MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

WORKS WITH:

DIMENSIONS

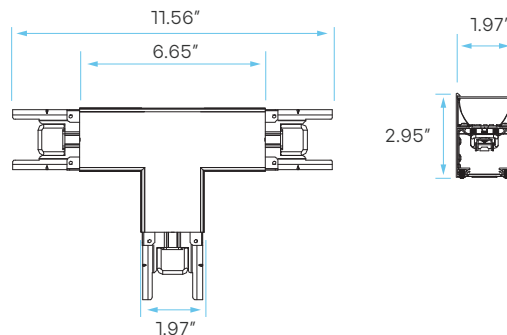

INSTALLATION

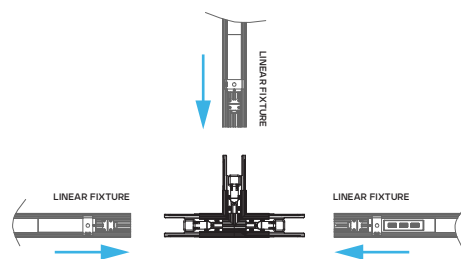


4" CONNECTOR OPTIONS

*SOLD SEPARATELY

LR42617




LR42618

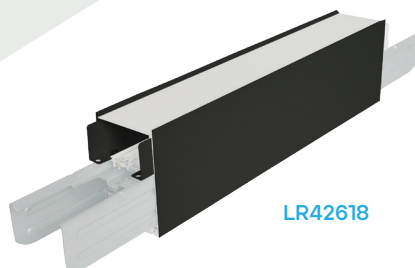

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42617	ARCHL4/3CCT/3WO/WT	4" CONNECTOR
LR42618	ARCHL4/3CCT/3WO/BK	4" CONNECTOR

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

WORKS WITH:

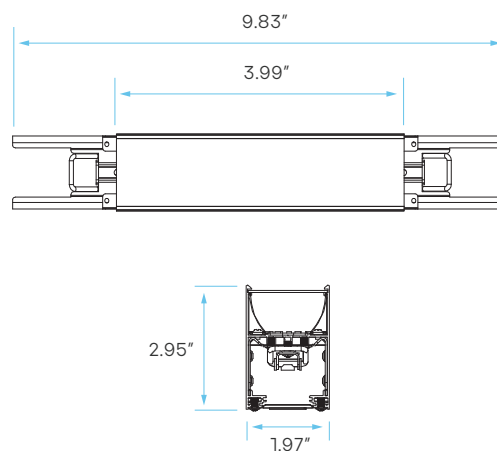


INSTALLATION



6" CONNECTOR OPTIONS

*SOLD SEPARATELY

LR42602


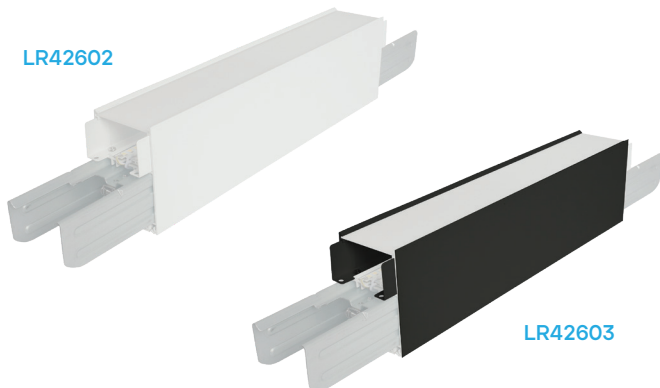


LR42603

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42602	ARCHL6/3CCT/3WO/WT	6" CONNECTOR
LR42603	ARCHL6/3CCT/3WO/BK	6" CONNECTOR

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	

WORKS WITH:

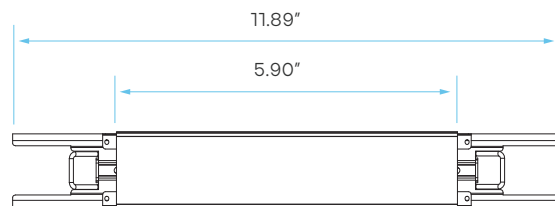


INSTALLATION



9" CONNECTOR OPTIONS

*SOLD SEPARATELY

LR42607


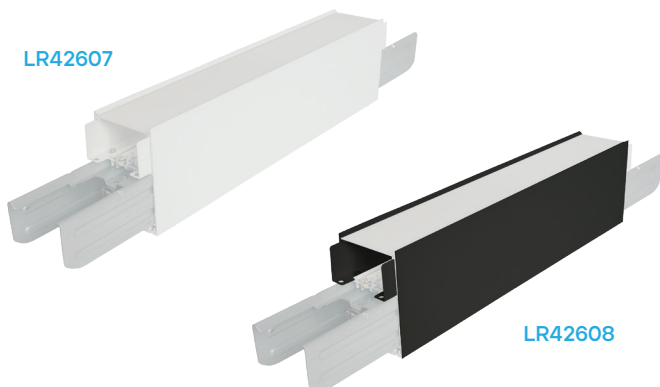


LR42608


MODEL	DESCRIPTION	CONNECTOR TYPE
LR42607	ARCHL9/3CCT/3WO/WT	9" CONNECTOR
LR42608	ARCHL9/3CCT/3WO/BK	9" CONNECTOR

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	

WORKS WITH:

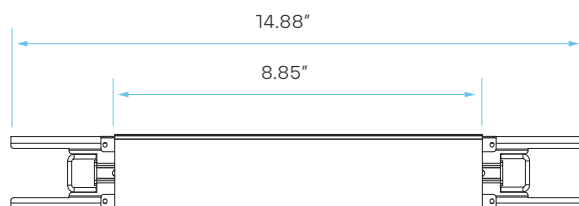


INSTALLATION



12" CONNECTOR OPTIONS

*SOLD SEPARATELY

LR42600


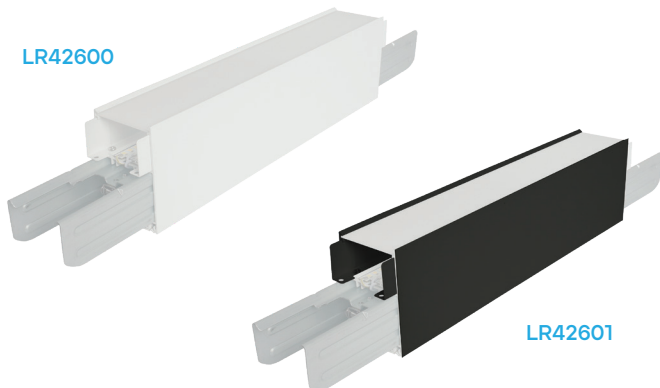


LR42601

MODEL	DESCRIPTION	CONNECTOR TYPE
LR42600	ARCHL12/3CCT/3WO/WT	12" CONNECTOR
LR42601	ARCHL12/3CCT/3WO/BK	12" CONNECTOR

WORKS WITH:

MODEL	DESCRIPTION	TYPE
LR42605	ARCHL24/3CCT/3WO/WT/UPDN	24" LINEAR
LR42606	ARCHL24/3CCT/3WO/BK/UPDN	24" LINEAR
LR42610	ARCHL48/3CCT/3WO/WT/UPDN	48" LINEAR
LR42611	ARCHL48/3CCT/3WO/BK/UPDN	48" LINEAR
LR42612	ARCHL72/3CCT/3WO/WT/UPDN	72" LINEAR
LR42613	ARCHL72/3CCT/3WO/BK/UPDN	72" LINEAR
LR42615	ARCHL96/3CCT/3WO/WT/UPDN	96" LINEAR
LR42616	ARCHL96/3CCT/3WO/BK/UPDN	96" LINEAR

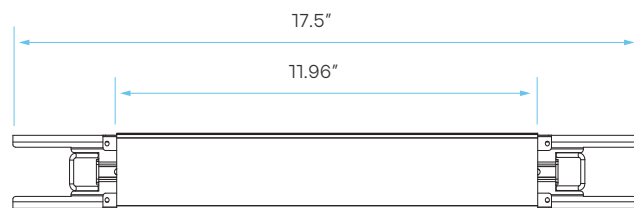


INSTALLATION




MOUNTING OPTIONS

*SOLD SEPARATELY


"L" WALL MOUNT KIT

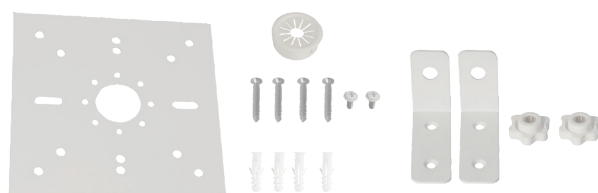


MODEL	DESCRIPTION	TYPE
LR42630	ARCHL/WALL2-KIT	"L" WALL MOUNT KIT

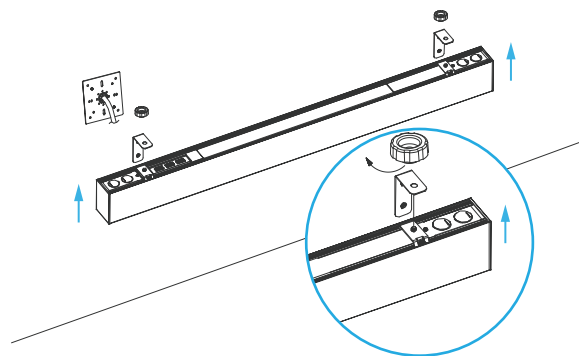

WALL MOUNT KIT





MODEL	DESCRIPTION	TYPE
LR42631	ARCHL/WALL-KIT	WALL MOUNT KIT

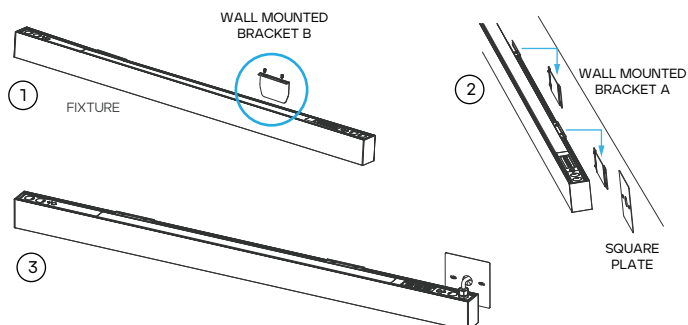

MOUNTING OPTIONS



*SOLD SEPARATELY

SURFACE MOUNT KIT

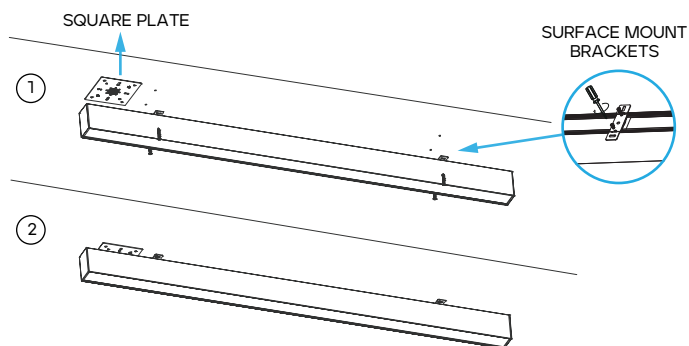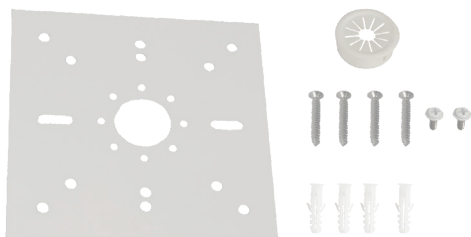


MODEL	DESCRIPTION	TYPE
LR42632	ARCHL/SURF-KIT	SURFACE MOUNT KIT

T-GRID KIT

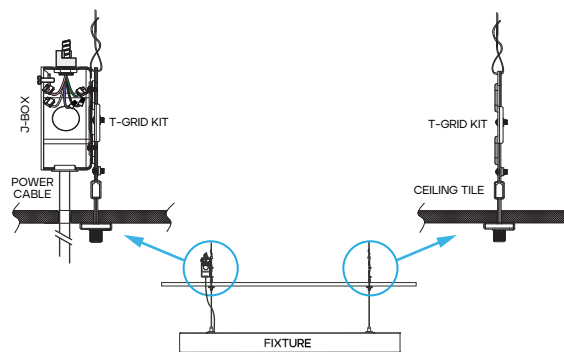

MODEL	DESCRIPTION	TYPE
LR42633	ARCHL/TGRID-KIT	T-GRID KIT

LINK KIT

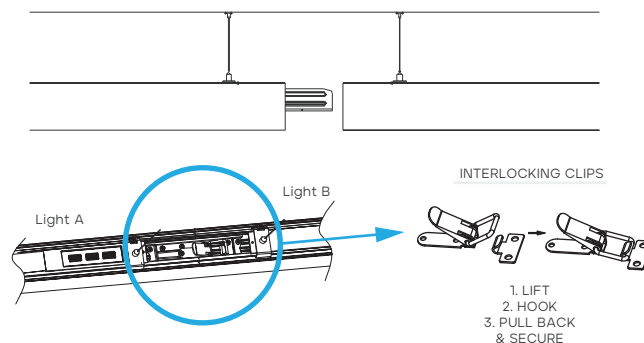


MODEL	DESCRIPTION	TYPE
LR42634	ARCHL/LINK-KIT	LINK KIT

10' WIRE



MODEL	DESCRIPTION	TYPE
LR42635	ARCHL/WIRE10	10' WIRE
LR42637	ARCHL/PWR10/BK	10' WIRE

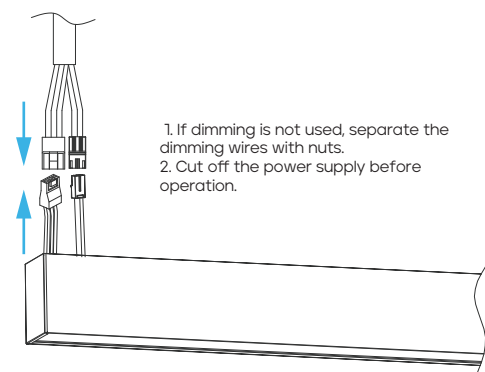

MOUNTING OPTIONS


*SOLD SEPARATELY

MOTION SENSOR CANOPY



ADJUSTABLE
VIA DIP SWITCH

DEFAULT SETTINGS	
SENSITIVITY:	100%
STAND-BY TIME:	1 MIN
STAND-BY LIGHTING	30%
LEVEL:	
HOLD TIME:	1 MIN

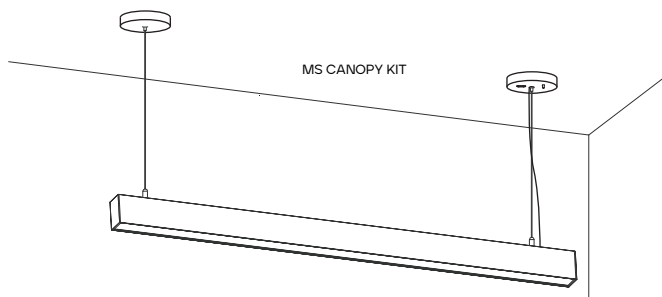

MODEL

DESCRIPTION


TYPE

LR42636

ARCHL/MS-CANOPY

MOTION SENSOR
CANOPY

CONDUIT KIT

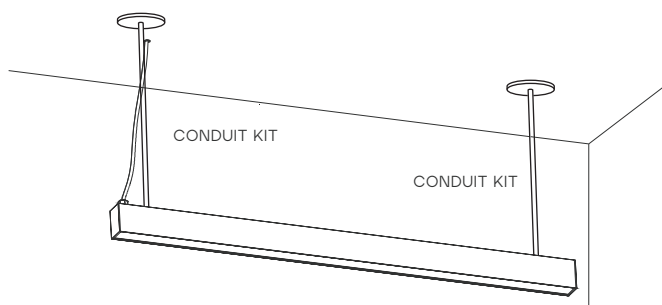

MODEL

DESCRIPTION



TYPE

LR42638

ARCHL/COND-KIT

CONDUIT KIT

SURFACE MOUNT KIT

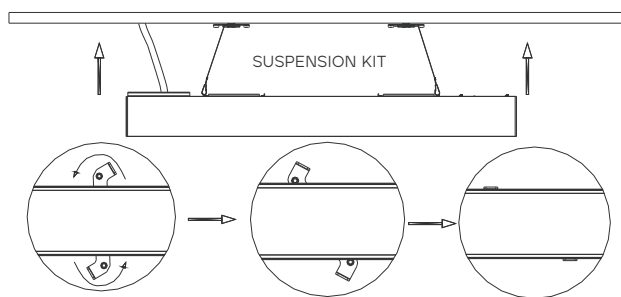

MODEL

DESCRIPTION



TYPE

LR42653

ARCHL/SURF-KIT2/WT

SURFACE MOUNT KIT

SURFACE MOUNT KIT

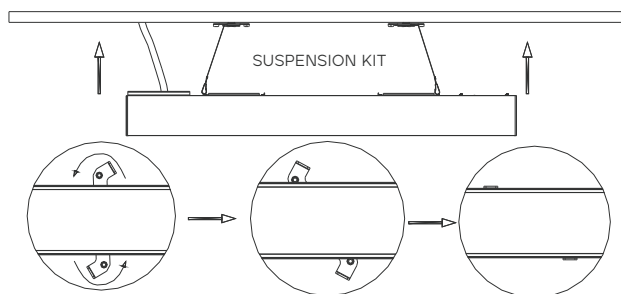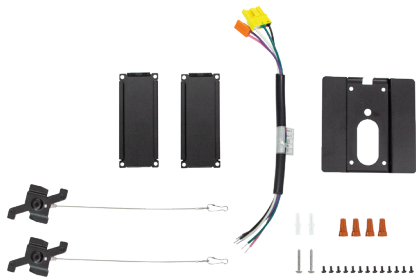

MODEL

DESCRIPTION

TYPE

LR42654

ARCHL/SURF-KIT2/BK

SURFACE MOUNT KIT

MOUNTING OPTIONS


*SOLD SEPARATELY

RECESSED MOUNT KIT





WORKS WITH 4' & 8'

MODEL	DESCRIPTION	TYPE
LR42639	ARCHL/REC-KIT	RECESSED MOUNT KIT

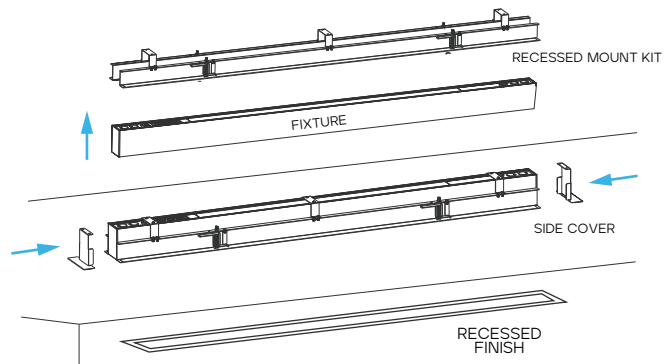


CANOPY KIT

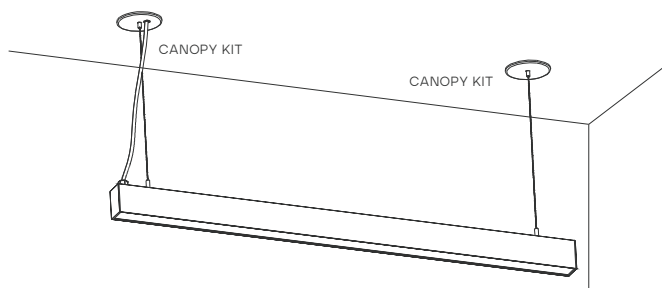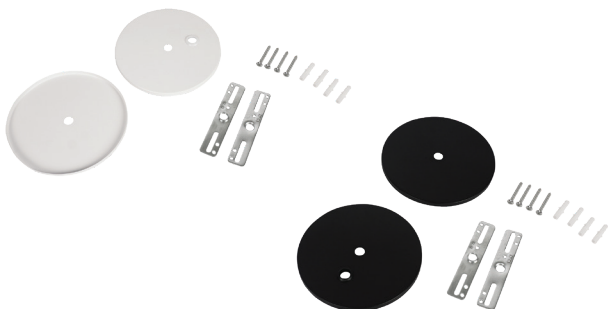


MODEL	DESCRIPTION	TYPE
LR42640	ARCHL/CNPY/WT/WIRE5	WHITE CANOPY KIT
LR42641	ARCHL/CNPY/BK/WIRE5	BLACK CANOPY KIT

10' SUSPENSION KIT

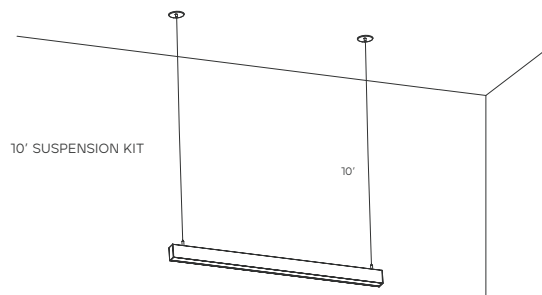

MODEL	DESCRIPTION	TYPE
LR42646	ARCHL/SUSP/KIT/10	10' SUSPENSION KIT

FLEXIBLE COVER

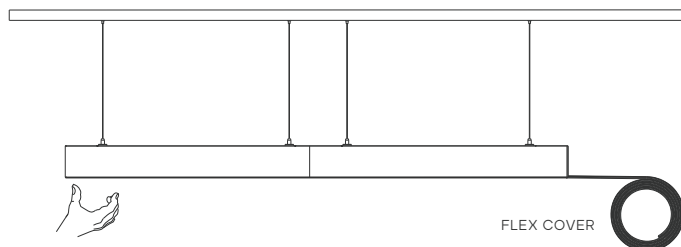

MODEL	DESCRIPTION	TYPE
LR42644	ARCHL/FLEX-CVR25	25' FLEXIBLE COVER
LR42645	ARCHL/FLEX-CVR100	100' FLEXIBLE COVER