




WIRE MANAGEMENT & CONNECTORS

Non-Insulated Ring Terminals

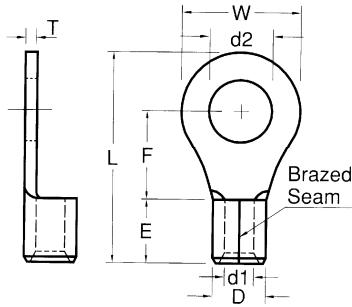

MAXIMUM ELECTRIC CURRENT:

8 AWG: 62 Ampere

6 AWG: 88 Ampere

4 AWG: 115 Ampere

2 AWG: 160 Ampere

TERMINAL MATERIAL: Copper Brazed Seam

Measurement = inches

Cat No.	Wire Size AWG	Stud Size	d2	W	F	L	E	D	d1	T	Bag Qty	Master Bag Qty	Per 100
11076	8	#6	.146	.315	.366	.846	.337	.283	.177	.047	100	1000	
11078	8	#8	.169	.472	.366	.937	.337	.283	.177	.047	100	1000	
11080	8	#10	.209	.472	.366	.937	.337	.283	.177	.047	100	1000	
11082	8	1/4	.252	.472	.366	.937	.337	.283	.177	.047	100	1000	
11084	8	5/16	.331	.591	.543	1.161	.337	.283	.177	.047	100	1000	
11086	8	3/8	.413	.591	.543	1.161	.337	.283	.177	.047	100	1000	
11088	8	1/2	.512	.787	.591	1.319	.337	.283	.177	.047	100	1000	
11090	6	#8	.169	.472	.524	1.173	.413	.354	.228	.059	100	1000	
11092	6	#10	.209	.472	.524	1.173	.413	.354	.228	.059	100	1000	
11094	6	1/4	.252	.472	.524	1.173	.413	.354	.228	.059	100	1000	
11096	6	5/16	.331	.630	.559	1.280	.413	.354	.228	.059	100	1000	
11098	6	3/8	.413	.630	.559	1.280	.413	.354	.228	.059	100	1000	
11100	6	7/16	.453	.866	.780	1.614	.413	.354	.228	.059	100	1000	
11102	6	1/2	.512	.866	.780	1.614	.413	.354	.228	.059	100	1000	
11104	4	#8	.169	.866	.594	1.307	.472	.453	.303	.067	100	1000	
11106	4	#10	.209	.866	.594	1.307	.472	.453	.303	.067	100	1000	
11108	4	1/4	.252	.866	.594	1.299	.472	.453	.303	.067	100	1000	
11110	4	5/16	.331	.650	.531	1.319	.472	.453	.303	.067	100	1000	
11112	4	3/8	.413	.650	.531	1.319	.472	.453	.303	.067	100	1000	
11114	4	7/16	.453	.866	.776	1.661	.472	.453	.303	.067	100	1000	
11116	4	1/2	.512	.866	.776	1.661	.472	.453	.303	.067	100	1000	
11118	2	#10	.209	.602	.685	1.535	.551	.524	.370	.071	100	1000	
11120	2	1/4	.252	.602	.685	1.535	.551	.524	.370	.071	100	1000	
11122	2	5/16	.331	.602	.685	1.535	.551	.524	.370	.071	100	1000	
11124	2	3/8	.413	.602	.685	1.535	.551	.524	.370	.071	100	1000	
11126	2	7/16	.453	.866	.697	1.681	.551	.524	.370	.071	100	1000	
11128	2	1/2	.512	.866	.697	1.681	.551	.524	.370	.071	100	1000	