



Meter Socket #MSIG-100

125 Amp Ring Type 5 Jaw Meter Socket




- 100 Amp Continuous Demand Rating
- Approved for OVERHEAD/UNDERGROUND Cable Entry
- UL Approved Outdoor Enclosure Construction (NEMA 3R)
- Horn Bypass Available as an additional Kit Item
- Con Edison Approved

Specifications	
Phase:	1 Phase
Frequency:	60 Hz
Voltage Rating:	600VAC
Amperage Rating:	125 Amps; 100 AMP Cont.
Construction Type:	NEMA 3R
Size:	12-1/8" x 8-5/8" x 4-1/2"
Cable Entry:	Overhead or Underground
Terminal Type:	Lug Type
Insulation Block:	Polymer Based
Enclosure Material:	ANSI-61 Powder Coated G90 16 GA Galvanized Steel
Jaw Type:	5 Jaw
Bypass:	No Bypass*
Meter Type:	Ring Type
Mounting Style:	Surface Mount
Line Wire Range:	6AWG - 350 kcmil
Load Wire Range:	6AWG - 350 kcmil
*Horn Bypass available as an additional Kit Item	



Consolidated Edison Co. Inc.
Table II
Outdoor/Indoor Box-Type
Watt-Hour Meter Sockets for AC Meters

Manufacturer	Amp Rating	PART# MS-IG-100		PART# MS-IG-100	
		3-Wire 120/208 Volts		120/240 Volts	4-Wire 120/208 Volts
		5-Jaw			7-Jaw
		Top Entry		Bottom Entry	Top or Bottom Entry
		With or Without Hub	1-1/4" Fixed Hub	Closure Plate or Solid End wall	Closure Plate
		Without By-Pass Facilities -- Residential Use ONLY			
Nav-Tech, Inc.	125	PART# MS-IG-100		PART# MS-IG-100	

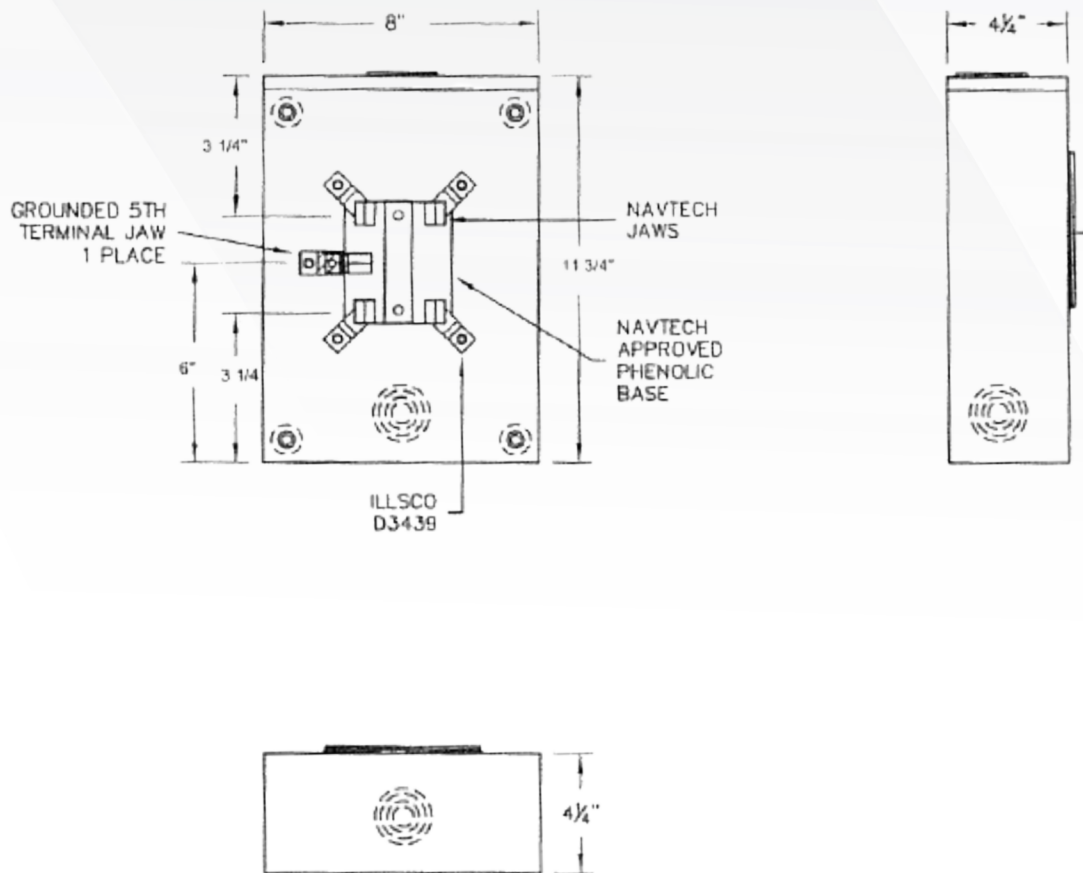

NOTES:
 DIMENSIONS ARE NOMINAL & LISTED WITHOUT COVERS INSTALLED
 CABINET SHALL BE RATED NEMA 3R
 ANSI-61 POWDER COATED G90 16 GA GALVANIZED STEEL