

NM Series – Surface, Update Frames and Rough-ins



NM Series Surface and Update Frames

Frames	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
NF200CAL	Almond	16-1/8"	11-7/8"	–	2-1/2" with 'Master' Station & CD Player	NWH300C
NF200CWH	White	16-1/8"	11-7/8"	–	2-1/2" with 'Master' Station & CD Player	NWH300C
NF200MWH	White	16-5/16"	6-1/4"	–	1-3/16" with 'Master' Station	NWH300
NF100MWH	White	17-1/2"	10-5/8"	–	1-3/16" with 'Master' Station	NWH300
NF100CWH	White	17-1/2"	15-3/16"	–	2-1/2" with 'Master' Station & CD Player	NWH300C
NF300RWH	White	7-1/2"	10"	–	1-1/4" with Remote Station	Replacement installation, use existing rough-in
NRKS200PWH	White	5-7/8"	7-7/8"	–	4-3/8" with Outdoor Station	–
NF300PWH	White	7-1/2"	10"	–	1-1/4" with Remote Station	Replacement installation, use existing rough-in
NES300DBL	Black	5-15/16"	3-13/16"	–	2-3/16" with Door Speaker	–
NES300DWH	White	5-15/16"	3-13/16"	–	2-3/16" with Door Speaker	–
NF300DWH	White	4-7/8"	6-5/8"	–	1-9/16" with Door Speaker	Replacement installation, use existing rough-in
NRKS300R	White	9-7/16"	11"	–	4-5/16" with Remote Station	–

NM Series Rough-ins

Rough-Ins	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
NWH300	Metal	14-3/8"	5-9/16"	3-1/2"	No projection with 1/2" or thicker finish wall surface	–
NWH300C	Metal	14-3/8"	11-1/4"	3-1/2"	No projection with 1/2" or thicker finish wall surface	–
NRKR200R	Metal	5-15/16"	5-3/4"	7/16"	No projection with 1/2" or thicker finish wall surface	–
NRKF200P	Plastic	4-13/16"	4-7/8"	2-13/16"	–	–
NRKR300D	Metal	3-5/8 "	5-3/4"	2-3/8"	–	–

NRKS200PWH – Outdoor Remote Station Surface Mount Frame

The NRKS200PWH Outdoor Remote Station Surface-mount Frame is used to rough-in outdoor remote stations used with an NM200 installation. This plastic frame is compatible with the NPS200WH Outdoor Remote Station.

NF200MWH – ‘Master’ Frame

The NF200MWH ‘Master’ Frame is used in installations where a gap is exposed around the master mounting hole. The frame is designed to fit NM200 and NM100 ‘Master’ Stations.

NF200CWH (White) and NF200CAL (Almond) ‘Master’ and CD Combination Frame

The NF200C ‘Master’ and CD Combination Frame is used in new and retrofit intercom installations. The frame is designed to fit an NM200 and NM100 ‘Master’ Station with an NC300 CD Changer.

NF100CWH – ‘Master’ and CD Combination Retrofit Frame

The NF100CWH ‘Master’ Retrofit Frame (White) is used in retrofit intercom installations when replacing a master only system with an NM100 or NM200 ‘Master’ System in a 6-wire retrofit installation with NC300 CD changer.

NF300RWH – Indoor Remote Station Retrofit Frame

The NF300RWH Indoor Remote Station Retrofit Frame is used in retrofit intercom installations when replacing older indoor remote stations with NRS103, NRS104 or NRS200 Indoor Remote Stations.

NF100MWH – ‘Master’ Retrofit Frame

The NF100MWH ‘Master’ Retrofit Frame (White) is used in retrofit intercom installations when replacing a master only system with an NM100 or NM200 ‘Master’ System in a 6-wire retrofit installation.

NF300DWH – Door Speaker Retrofit Frame

The NF300DWH Door Speaker Retrofit Frame is used in retrofit intercom installations when replacing a non-NM series NuTone door station. This retrofit mounting frame fits the NDB300BB, NDB300AB, NDB300WH and NDB300N Door Speakers.

NM200 and NM100 Accessories

NA3003C – 3-Note Chime Module

The NA3003C 3-Note Chime Module can be installed in either NM100 or NM200 ‘Master’ Stations. To announce a visitor, the intercom system’s door chime sounds when the chime button is pressed on a door speaker connected to the intercom. The module can be set to play one, two, or three notes with a different chime for each door.

NA3008C – 8-Note Chime Module

The NA3008C 8-Note Chime Module can be installed in either NM100 or NM200 ‘Master’ Stations. To announce a visitor, the intercom system’s door chime sounds when the chime button is pressed on a door speaker connected to the intercom. The module can be set to play one, two, four, or eight notes with a different chime for each door.

NW4S – Shielded Cable, 22 gauge


The NW4S Shielded Door Station Cable is 4-conductor, 22 gauge, shielded cable. The cable is supplied in a 75 foot roll. This cable is typically used to connect NM Series door stations to NM200 and NM100 systems.

IA30WH Audio Wall Plate

Interface home audio equipment into the NuTone® intercom system. Allows you to send audio from a CD, MP3, DVD or cassette tape and distribute it through a NuTone® intercom system. White metal audio plate includes two RCA™ female connectors for connecting to your equipment. Mounts on wall behind home audio equipment. Installs and connects to the intercom using IR30K rough-in kit.

IR30K Rough-In Kit

Rough-in housing kit is used to mount and connect IA30WH wall plate. Includes plastic single gang wall box and two 50’ shielded audio cables with RCA™ plugs.

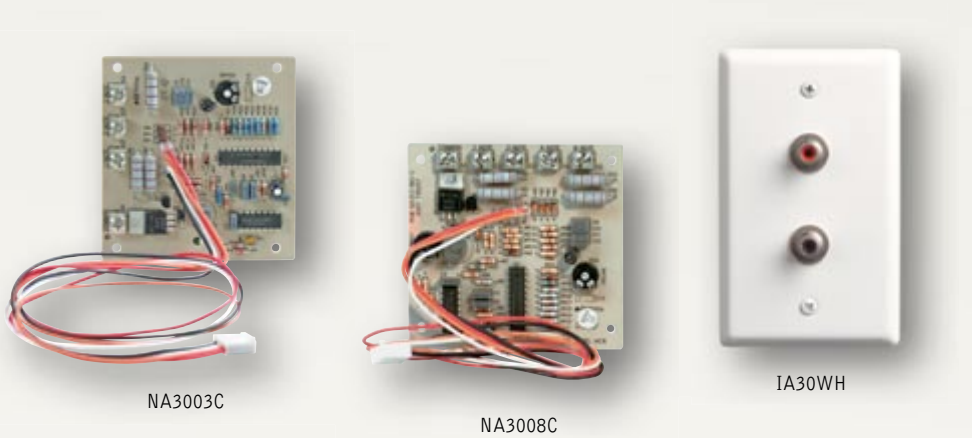

Chime Model Option for: NM100 and NM200

Finish Kit Model No.	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
NA3003C	–	3-1/4"	3-1/4"	Chime module mounts inside 'Master' station		
NA3008C	–	3-1/4"	3-1/4"	Chime module mounts inside 'Master' station		

NM100, NM200 Intercom Accessories

Order Rough-in PLUS finish kit to make a complete unit

Finish Kit Model No.	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
Audio Wall Plate						
IA30WH	Bright White	2-13/16"	4-9/16"	9/16"	9/16"	IR30K
Transformers						
NA200TA	–	6-5/8"	4-5/8"	3-3/4"	–	–
NA300TA	–	6-5/8"	3-3/4"	3-11/16"	–	–
Cable						
NW4S	–	–	–	–	–	–

NM200 Intercom Accessories

Connector mounting inside NM200 Master Station

Finish Kit Model No.	Finish	Width	Height	In-Wall Depth	Projects	Rough-In Model No.
Station Connector						
NA200QC	–	1-3/16"	7/8"	1/2"	–	–

Intercom Options:

See p. 13 for intercom speakers and volume control and p. 14 for update and surface frames.