


4" LINE VOLTAGE R/PAR HOUSINGS + TRIMS MEDIUM BASE

50W R/PAR 20 MAX

All Nora 4" housings are thermally protected, listed for damp location, listed for feed through and include an adjustable socket, 24-1/2" adjustable bar hangers with captive nails and quick connects.

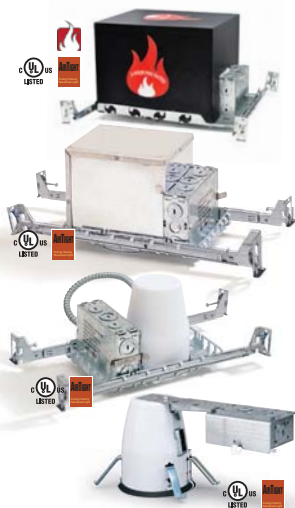

NFBIC-4INCAT* 50W R/PAR20
4" 2-Hour Fire Rated Line Volt Housing
Dia: 4-3/8" Depth: 6-38"

NSIC-401QAT* 50W R/PAR20
4" IC Airtight Double Wall
Line Voltage Housing
Dia: 4-3/8" Depth: 6"

NS-401QAT* 50W R/PAR20
4" Non-IC Airtight Line Voltage Housing
Dia: 4-3/8" Depth: 5-3/4"

NSRIC-404QAT* IC 50W R/PAR20 **NEW!**
NSR-404QAT* Non-IC 50W R/PAR20
4" Airtight Line Voltage Remodel
Dia: 4-3/8" Depth: 6-1/4" (IC), 5-5/8" (Non-IC)

* Can be factory labeled with reduced maximum wattage. Add / and maximum wattage to model number. Example: NSR-404AT/12 - maximum wattage 12W.



Square Trim w/ Baffle
NS-4910WN
BB, BBZ, BCO,
WC, WG, WN, WW



Square Trim w/ Reflector
NS-4914GW
BB, BZBZ, CB, CC, CG,
CW, COCO, GW, HZW, NN



Square Regressed Trim
NS-4857 BB, BBW, BWW,
BZBZ, HZW, NN, WW 35°



Square Trim w/ 1" Pinhole
NS-4940CO
B, BZ, C, CO, G, N, W



Square w/ Frost Flat Lens
NS-4926CO
B, BZ, C, CO, G, N, W



Square Frost/Clear Flat Lens
NS-4927W
B, BZ, C, CO, G, N, W



Square w/ 2" Square Pinhole
NS-4855
BB, BW, BBZ, BN, WW



Square Trim w/ Gimbal
NS-4912W
BZ, CO, N, W 20°



Surface Gimbal 20°
NS-12N
BZ, CO, N, W

CC Custom Combo: Available with custom combinations of reflector and plastic and metal ring finish. See page 26 for details.