

NOX-436

4" Onyx Square LED Retrofit Reflector

Source: 10.5W or 14.5W LED
Up to 900lm

PRODUCT DESCRIPTION

Onyx Retrofit Series is suitable for use with most 4" recessed housings. Die-cast aluminum construction provides clean sharp edges. Deep regressed optics and round aperture delivers even and glare-free illumination. Available in multiple color temperatures and 90+ CRI.

FEATURES

- Up to 900 delivered lumens
- 2700K @ 90+ CRI
- Integral dimmable driver
- Includes medium base socket adapter for easy retrofitting in 4" recessed housings
- Quick connector is compatible with dedicated LED housings
- 5-year limited warranty
- cULus classified for wet locations
- ENERGY STAR certified

SPECIFICATION

Reflector: One piece, die-cast aluminum construction dissipates heat and extends life. Unitized Thermal Management, UTM, provides exceptional cool operation.

Mounting: Two steel, spring mounting blades allow for easy and secure mounting in most 4" housings.

Optics: Nora specified and designed precision-molded lens for optimal lumen output and even distribution. The white polymer lens diffuser evenly distributes the light.

Retrofit: Onyx retrofit series includes medium base screw-socket adapter ([NRA-211SM](#)) for retrofitting into existing medium base downlight housings. GU24 socket adapter is available for use with GU24 housings, must specify [NRA-212SM](#).

ELECTRICAL	(blank)	/9
Input Voltage	120V	
Input Power	10.5W	14.5W
Color Temperature	2700K	2700K
CRI	90+ CRI	
Dimming	Triac / ELV	
Operating Temp.	0° to 45°C	

COMPATIBLE HOUSINGS

Onyx reflectors are compatible with most 4" IC and Non-IC housings by Nora and others.

Fire Box

- [NFBIC-4LMRATA*](#) IC Air-Tight Dedicated LED Firebox
- [NFBIC-427LMRATA*](#) Shallow ICAT Dedicated LED Firebox
- [NFBIC-4INCATA](#) IC Air-Tight Line Voltage Firebox

New Construction

- [NHIC-4LMRAT*](#) IC Air-Tight Dedicated LED
- [NHIC-4LMRAT/277*](#) ICAT Dedicated LED, 277V (includes step-down transformer)
- [NHICCP-4LMRAT*](#) Chicago Plenum Dedicated LED (NHICCP-4LMRAT is not compatible with 1000lm)
- [NHIC-427LMRAT*](#) Shallow IC Air-Tight Dedicated LED (NHIC-427LMRAT is not compatible with 1000lm)
- [NSIC-401QAT](#) IC Air-Tight Line Voltage
- [NS-401QAT](#) Air-Tight Line Voltage
- [NHIC-4G24AT](#) IC Air-Tight GU24

Remodel

- [NHRIC-4LMRAT*](#) IC Air-Tight Dedicated LED
- [NHRIC-427LMRAT*](#) Shallow IC Air-Tight Dedicated LED (NHRIC-427LMRAT is not compatible with 1000lm)
- [NSR-404QAT](#) Air-Tight Line Voltage
- [NSRIC-404QAT](#) IC Air-Tight Line Voltage

* Nora LED Dedicated housings are cULus listed for use only with Nora LED Retrofits.

LABELS AND LISTINGS


- cULus classified for Wet Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- Meets ASTM-E283 Air-Tight requirements
- Certified to the high efficacy requirements of California Title 24 JA8-2022



Type
Project
Catalog No.
Notes

Performance Data			
Part Number	(blank) Lumens	/9 Lumens	CCT
NOX-43627WW	750lm	909lm	2700K
NOX-43630WW	-	-	3000K
NOX-43640WW	-	-	4000K

PRODUCT IMAGES AND DIMENSIONS

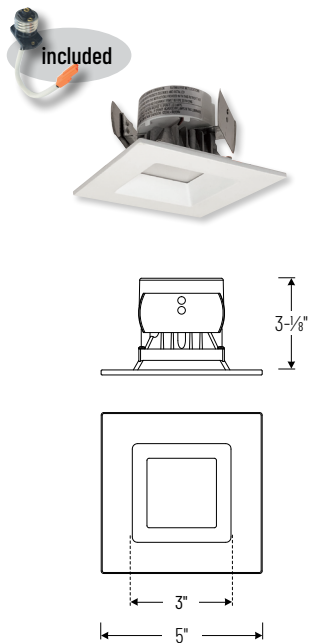

4" Onyx Square Retrofit Reflectors

Lumens / Wattage / Color Temperature	
NOX-43627WW	= 750lm / 10.5W / 2700K
NOX-43627WW/9	= 909lm / 14.5W / 2700K
NOX-43630WW	= 718lm / 10.5W / 3000K (Discontinued, direct replacement: NOXAC-43630WW/HL)
NOX-43630WW/9	= 947lm / 14.5W / 3000K (Discontinued, direct replacement: NOXAC-43630WW/HL)
NOX-43640WW	= 682lm / 10.5W / 4000K (Discontinued, direct replacement: NOXAC-43640WW/HL)
NOX-43640WW/9	= 1040lm / 14.5W / 4000K (Discontinued, direct replacement: NOXAC-43640WW/HL)

Optional Accessories

Description
NRA-211SM = Medium base screw-in socket (included w/ ea)
NRA-212SM = Socket adapter for use with GU24 housings

Example: **NOX-43627WW/9** = 4" Onyx Square Reflector, 909lm / 14.5W LED, 2700K, White Finish