


NS-12 Surface Gimbal Ring

TRIM DIMENSIONS



Trim OD: 5"
Height: 1-5/8"

FEATURES

Trim

Metal trim with gimbal that can be adjusted up to 20°. Adjustable gimbal allows lamp to be mounted flush with trim.

Mounting

Trim includes three trim clips that securely mount trim in housing. Remove socket from plate and mount lamp into gimbal ring.

Compatible Housings

Compatible with Line Voltage housings.
See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

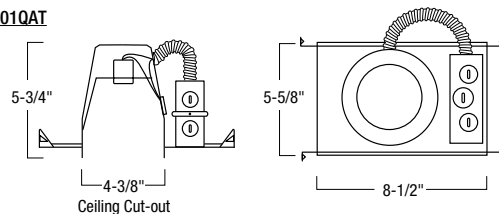

NSIC-401QAT

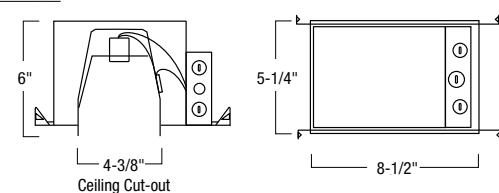

NSR-404QAT

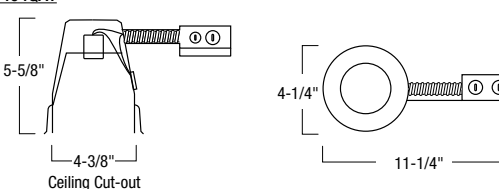

Surface Gimbal Ring

- ☐ NS-12BZ: Bronze Surface Gimbal Ring
- ☐ NS-12CO: Copper Surface Gimbal Ring
- ☐ NS-12N: Natural Metal Surface Gimbal Ring
- ☐ NS-12W: White Surface Gimbal Ring

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
<input type="checkbox"/> NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
<input type="checkbox"/> NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
<input type="checkbox"/> NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

NORALIGHTING

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com