

NUD-68 Series

Bravo FROST 120V LED Linear

Source: 7W LED
500lm/ft

PRODUCT DESCRIPTION

Nora Lighting's low-profile, fixtures provide excellent and even illumination on all surfaces. At only 7 watts per foot, Bravo FROST produces 500 lumens at a crisp sharp 95+ CRI. Each Bravo Frost contains its own driver allowing a 120V feed and longer single runs than low voltage systems. It is one of the most energy efficient products in the market. LED technology eliminates forward heat from the fixture, also no UV or infrared rays to harm artwork or heat sensitive foods.

FEATURES

- Architectural extruded aluminum construction
- Symmetrical internal reflectors produce broad even light
- Frosted lens eliminates LED diode image
- 120V linear system
- 500 lumens / 7 Watts per foot
- 2700K, 3000K, 4000K or 5000K @ 90+ CRI
- Available in 4 different lengths: 12", 18", 24", 32"
- Linkable up to 300 Watts fixtures (about 43')
- Less than 1" in depth.
- Self contained dimmable electronic driver in each unit
- 0° to 90° adjustable mounting brackets included
- Bronze and White finishes
- Rated for 50,000 hours @ L70

INCLUDED WITH EVERY BRAVO FROST

(2) Adjustable mounting clips (0° - 90°) and (1) End-to-End Connector

HOUSING

Extruded aluminum with frosted lens.

MOUNTING

Two adjustable mounting brackets (0° - 90°) are included with each luminaire.

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 500lm / 7W per foot

Color Temperature: Warm White (2700K, 3000K) Cool White (4000K, 5000K)

CRI: 90+ CRI

Life Expectancy: 50,000 hours @ L70

Max Run Length: 300W max.

Dimming: Electronic Low Voltage

LABELS AND LISTINGS

- cULus Listed for Dry Location
- ENERGY STAR® Certified
- Can be used to comply with 2016 Title 24 Part 6 high efficacy LED light source requirements
- 5-Year Limited Warranty




PRODUCT IMAGES AND DIMENSIONS



Dimensions	NUD6812	NUD6818	NUD6824	NUD6832
Length (A)	12-5/6"	18-5/6"	24-1/4"	32-13/16"

0-90° ADJUSTABILITY

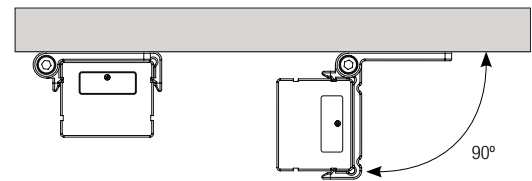

Bravo FROST 120V LED Linear

Catalog No.	Length / Lumen / Wattage	Color Temperature	Finish
NUD-68	12 = 12" / 520lm / 7W	/27 = 2700K	BZ = Bronze
	18 = 18" / 757lm / 10W	/30 = 3000K	W = White
	24 = 24" / 978lm / 13W	/40 = 4000K ¹	
	32 = 32" / 1212lm / 16W	/50 = 5000K ¹	

¹ Available in white finish only

Example: NUD-6812/30W = 12" Bravo FROST, 3000K, White finish

NUD-68 Series

Bravo FROST 120V LED Linear Accessories



Junction Box with On/Off Switch

NUA-602BZ

Bronze

NUA-602W

White

Junction box with on/off switch used to power Bravo FROST using jumper cable or NUA-604 (2-Wire Hardwire Connector)



Junction Box with On/Off Switch & Motion Sensor

NUA-6020CSW

White

Junction box with on/off switch and motion sensor used to power Bravo FROST using jumper cable or NUA-604 (2-Wire Hardwire Connector)



72" 2-Wire Hardwire Connector

NUA-604B

Black

NUA-604W

White

2-Wire connector use to hardwire fixture to NUA-602 (Junction Box)



72" Cord and Plug

NUA-605B

Black

NUA-605W

White

6' Grounded AC power cord to connect fixture to an outlet



Adjustable Mounting Brackets

NUA-609BZ

Bronze

NUA-609WH

White

Set of two brackets used angle fixture between 0° to 90°. Two brackets are included with each fixture.



End-to-End Connector

NUA-603BZ

Bronze

NUA-603W

White

Use to join two fixtures seamlessly together. One included with each fixture.



Jumper Cable

NUA-606B

Black

NUA-606W

White

NUA-612B

Black

NUA-612W

White

NUA-624B

Black

NUA-624W

White

NUA-672B


Black

NUA-672W

White

Used to join two fixtures together or to NUA-602 (Junction Box)

Bravo FROST Sample Layout

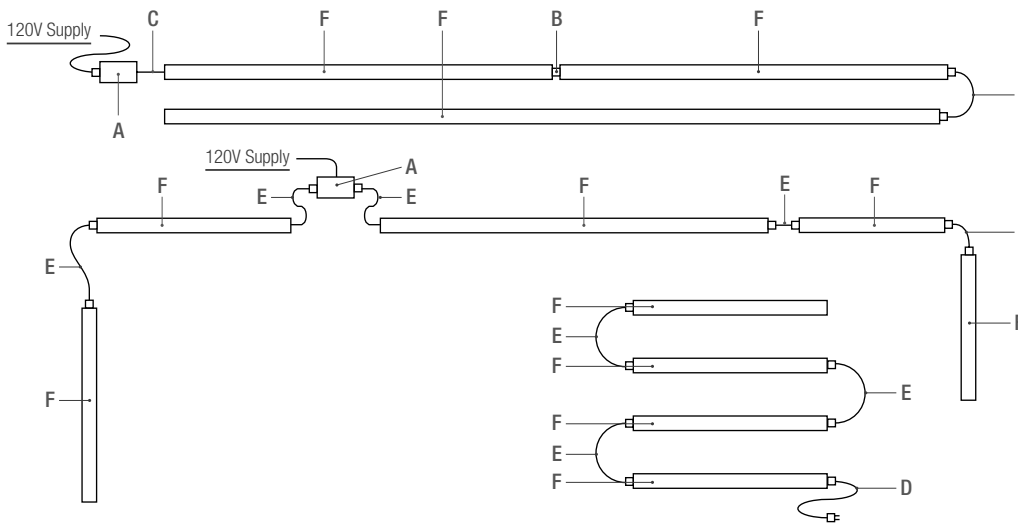

	Catalog No.	Description
A	NUA-602	Junction Box
B	NUA-603	End-to-End Connector (included with luminaire)
C	NUA-604	2-Wire Hardwire Connector
D	NUA-605	72" Cord and Plug
E	NUA-606	6" Jumper Cable
F	NUD-68xx	Bravo FROST