D28 NM Cable Fittings

STAMPED STEEL 1-HOLE RG6U CABLE STRAP

PRODUCT FEATURES

▶ Electroplated Zinc

Cat. No.	Description	Std. Pkg.	Master Ctn.
S1-25	RG6U (Coaxial Cable) 1-Hole Strap	100	1000



STAMPED STEEL 1-HOLE SERVICE **ENTRANCE STRAPS**

PRODUCT FEATURES

- Electroplated Zinc
- Corrosion-Resistant

Cat. No.	Description	Std. Pkg. Master Ctn.
SES1-50	Three #8, #6, #4	100 500
SES1-75	Three #3, #2	100 500
SES1-100	Three #1, #1/0, #2/0	50 250
SES1-200	Three #3/0, #4/0	25 250



STAMPED STEEL 2-HOLE SERVICE **ENTRANCE STRAPS**

PRODUCT FEATURES

- ► Electroplated Zinc
- ► Corrosion-Resistant

Cat. No.	Description	Std. Pkg. Master Ctn.
SES2-50	Three #8, #6, #4	20 100
SES2-75	Three #3, #2	20 100
SES2-100	Three #1, #1/0, #2/0	20 100
SES2-200	Three #3/0, #4/0	20 100



PRE-GALVANIZED STEEL **STUD MOUNTING CABLE SUPPORT**

PRODUCT FEATURES

- Wood or Metal Stud
- Easy to Lock
- Space saving packaging

Cat. No.	Description	Non-Metallic	MC/AC/BX	Std. Pkg.
CS-CJ6	Stud Mounting Cable Support with locking tab	Max. 6	Max. 4	100









Straps, Clamps and Hangers D67

MALLEABLE IRON 1-HOLE RIGID STRAPS

PRODUCT FEATURES

▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn.
SRM1-50	1/2"	100	1000
SRM1-75	3/4"	50	500
SRM1-100	1"	25	250
SRM1-125	1-1/4"	20	200
SRM1-150	1-1/2"	10	100
SRM1-200	2"	10	50
SRM1-250	2-1/2"	-	25
SRM1-300	3"	-	25
SRM1-350	3-1/2"	-	10
SRM1-400	4"	-	10



MALLEABLE IRON CLAMP BACK SPACERS

PRODUCT FEATURES

▶ Electroplated Zinc



Cat. No.	Trade Size	Std. Pkg.	Master Ctn
CBS-50	1/2"	25	250
CBS-75	3/4"	25	250
CBS-100	1"	25	250
CBS-125	1-1/4"	10	100
CBS-150	1-1/2"	10	100
CBS-200	2"	5	50
CBS-250	2-1/2"	-	25
CBS-300	3"	-	10
CBS-350	3-1/2"	-	10
CBS-400	4"	-	10




STAMPED STEEL **NAIL STRAPS**

PRODUCT FEATURES

▶ Electroplated Zinc

NOTES

Varies according to sizes





PRE-GALVANIZED STEEL STUD MOUNTING **CABLE SUPPORT**

PRODUCT FEATURES

- Wood or Metal Stud
- ▶ Easy to Lock
- ▶ Space Saving Packaging

Cat. No.	Description	Non-Metallic	MC/AC/BX	Std. Pkg.
CS-CJ6	Stud Mounting Cable Support with locking tab	Max. 6	Max. 4	100









F10 | Cable & Conduit



SPRING STEEL MC/AC CABLE TO STUD CLIP

PRODUCT FEATURES

- ▶ No tools required to install
- Holes in clip allow it to be screwed into wood stud, concrete or block
- Stabilizer legs provide "wobble-free" support
- Compliant with NEC® Article 300.4(d), allowing cable to be positioned a minimum of 1-1/4" from face of stud
- Compliant with CEC Rule 12-618 for support of MC/AC cable
- Snaps in half, making two clips out of one

Cat. No.	Flange Thickness	MC/AC Size	Std. Pkg.
FMAC2	1/8" MAX	14/2 to 10/3	100





SPRING STEEL MC/AC CABLE TO METAL STUD CLIP

PRODUCT FEATURES

- Easy installation of MC/AC to metal stud
- No tools required to install

Cat. No.	Outer Diameter		Std. Pkg.
MSC	0.429" - 0.531"	14/2 to 12/3	100





STAMPED STEELNAIL STRAPS

PRODUCT FEATURES

▶ Electroplated Zinc

NOTES

Varies according to sizes

			Master Ctn.
1/2"	3/8"	100	1000
3/4"	1/2"	100	1000
1"	3/4"	100	1000
	3/4"	3/4" 1/2"	3/4" 1/2" 100




PRE-GALVANIZED STEEL STUD MOUNTING CABLE SUPPORT

PRODUCT FEATURES

- Wood or Metal Stud
- ► Easy to Lock
- Space saving packing

Cat. No.	Description	Non-Metallic	MC/AC/BX	Std. Pkg.
CS-CJ6	Stud Mounting Cable Support with locking tab	Max. 6	Max. 4	100

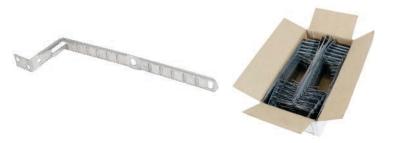







PRE-GALVANIZED STEEL STUD MOUNTING CABLE SUPPORT

PRODUCT FEATURES

- Wood or Metal Stud
- Easy to Lock
- Space Saving Packaging







PLASTIC UNIVERSAL METAL STUD GROMMET

PRODUCT FEATURES

- High Strength, non-conductive polypropylene
- Universal design fits into a standard 1" Trade Size hole and all factory-punched stud holes
- Lightweight material eases installation




Cat. No.DescriptionStd. Pkg.PUSGUniversal Snap-in type bushings for Metal Stud, fit all factory punched metal stud holes100

INSTALLATION INSTRUCTION:

Step 1: Separate the two halves


Step 2: Snap the bushing end and the washer end together through the hole
Step 3: Install cable through the grommet

Description



Cat. No. BMCS

BMCS-CJ6



BOX MOUNTED CONDUIT/	
CABLE SUPPORTS	

PRODUCT FEATURES

- Eliminates need for field installed first means of support
- Attaches directly to any size junction box for a cost-saving solution to first means of support needs
- ▶ Complies with NEC 330.30 (B)
- Eliminates the need for additional bar hangers in the field
- BMCS-CJ6 includes a CS-CJ6 for tool-less cable installation

8	0.0
	اقاقاقا
١	
ı	
	21100

BMCS




Box Mounted Conduit Cable Support

BMCS-CJ6



Box Mounted Conduit Cable Support with CS-CJ6 for tool-less installation

CS-CJ6
Secures up to 4 MC/AC Cables without tools



Std. Pkg.

50

50

Support up to 3 MC/AC Cables without tools







TRADITIONAL METHOD



BMCS-CJ6 installed on box to minimize field work & eliminates need for additional bar hanger





Installed with just one Wafer Head Screw



SSB System | P2

SSB WITH PREASSEMBLED ADJUSTABLE MASON BOX

3-1/2" DEEP

PRODUCT FEATURES

- ▶ SSB Bracket adjust from 15" to 25", rigidity eliminates need for farside back support
- Ships preassembled with box depth set at 5/8", and adjustable up to 1-1/2"
- ▶ Guided-slots on each side allow the box depth to be easily adjusted by simply loosening the screws
- ▶ Built-In Adapter allows Masonry Box to be moved along SSB Bracket until set in final position with a Tek screw
- All Knockouts are Concentric 1/2" & 3/4"

Cat. No.	No. of Gangs	KO Ends	KO Bottom	KO Sides	Cu. Inches	Std. Pkg
SSB-MB3	3	(6) - CKO	(3) - CKO	(4) - CKO	69.3	10
SSB-MB4	4	(8) - CKO	(4) - CKO	(4) - CKO	92.1	10
SSB-MB5	5	(10) - CKO	(5) - CKO	(4) - CKO	116.1	10
SSB-MB6	6	(12) - CKO	(6) - CKO	(4) - CKO	139	10











6-way Adjustability



Ex.: Nurse Call Systems



An ideal solution in Nurse Call systems and Headwall assemblies for healthcare projects.

& Guided Slots

SSB-MB3 SIDE VIEW

Adjustable 5/8" to 1-1/2"

BOX MOUNTED CONDUIT/ CABLE SUPPORT

PRODUCT FEATURES

- ▶ Eliminates need for field installed first means of support
- Attaches directly to any size junction box for a cost-saving solution to first means of support needs
- Complies with NEC 330.30 (B)
- ▶ Eliminates the need for additional bar hangers in the field
- ▶ BMCS-CJ6 includes a CS-CJ6 for tool-less cable installation

Cat. No.	Description	Std. Pkg.
BMCS	Box Mounted Conduit Cable Support	50
BMCS-CJ6	Box Mounted Conduit Cable Support with CS-CJ6 for tool-less installation	50
CS-CJ6	Stud Mounting Cable Support with locking tab	100



BMCS



CS-CJ6



Neat, efficient packaging prevents individual pieces from linking together







TRADITIONAL METHOD



BMCS-CJ6

BMCS-CJ6



Installed with just one Wafer Head Screw

Installed on box to minimize field work & eliminates need for additional bar hanger

FIRST MEANS OF SUPPORT OPTIONS


CS-CJ6

Secures up to 4 MC/AC Cables without tools



Secures to back of junction box with ONE Wafer Head screw!

Insert tab into lower screw hole on junction box



PIN HOLES

Pin holes allow for installation up to 2" straps



FORKS

Support up to 3 MC/AC Cables without tools



