

PB370 Bath Fan w/ 2x Grill

Item #: #45433

Operating Mode: 120V 1~ 60Hz



Remote exhaust fans for single or multiple locations. With or without LED lights.

- Smallest Footprint on Ceiling
- Dimmable Light (select models)
- Outdoor installation (select models)
- UL Listed
- Energy Efficient
- Backdraft Damper Included

[Find more details in our online catalogue](#)

Technical parameters


Nominal data	
Voltage (nominal)	120 V
Frequency	60 Hz
Phases	1~
Input power	106 W
Input current	0.9 A
Impeller speed	2,412 rpm
Air flow	max 389 cfm
Protection/Classification	
Enclosure class, motor	IP44
Insulation class	B
Dimensions and weights	
Duct dimension; Circular, inlet	6 in.
Duct dimension; Circular, inlet	6 in.
Duct dimension; Circular, outlet	6 in.
Weight	17.1 lb
Optional	
Duct connection type	Circular
Motor type	AC

Performances

HVI Certified Rating(s)


Static Pressure (In. Wg.)	Rated Airflow (CFM)	Rated Power (Watts)
0.20	340	106

Dimensions

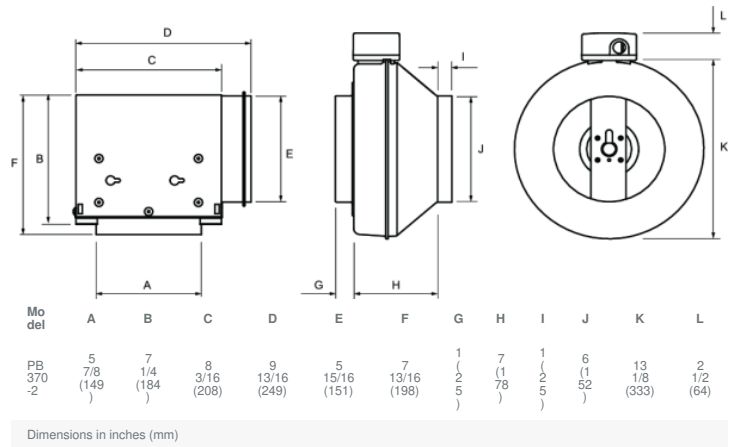


Wiring


Without Motor Speed Controller

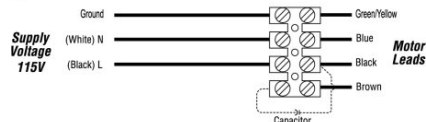

With Motor Speed Controller

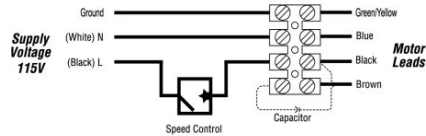


Multiple Location Switching Wiring Diagram

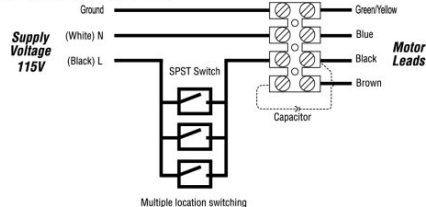

Performance curve

in. wg.

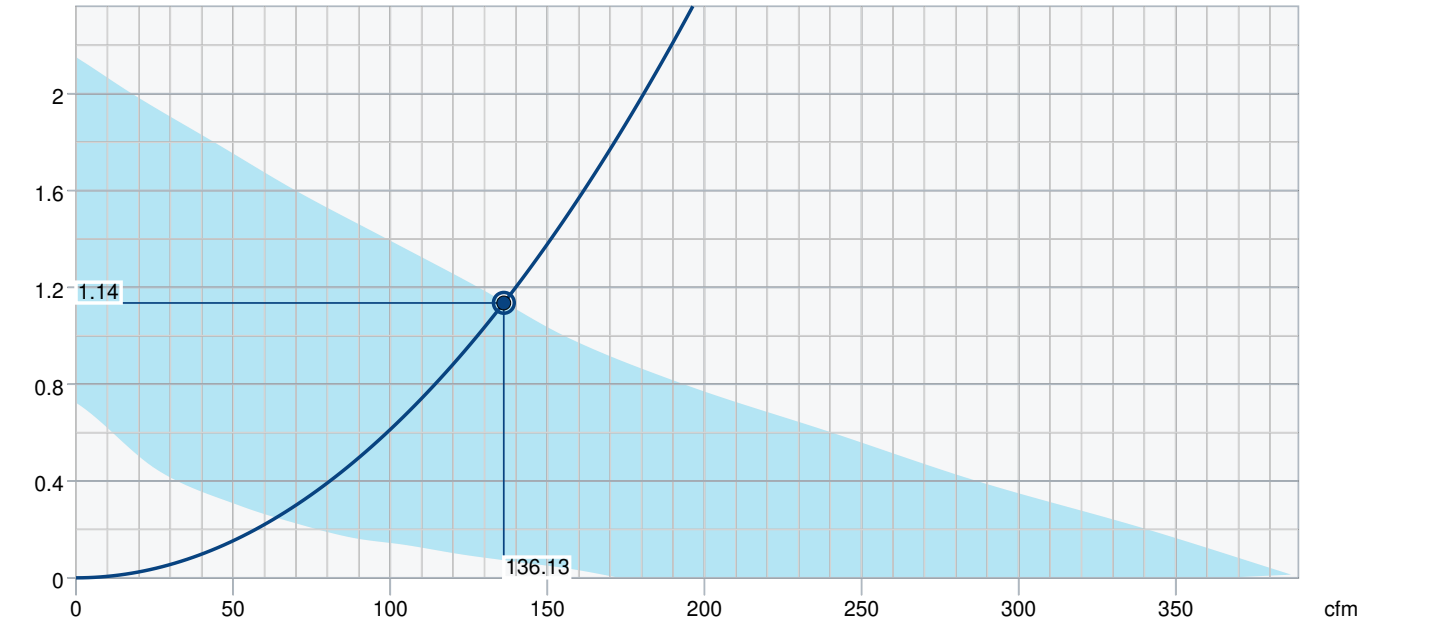

Hydraulic data	
Required air flow	136 cfm
Required static pressure	1.14 in. wg.
Working air flow	136 cfm
Working static pressure	1.14 in. wg.
Air density	0.075 lb/ft³
Power	102 W
Fan control - RPM	2,412 rpm
Airflow efficiency	1.3 cfm/W
Supply voltage	120 V

Accessories

- FD60EM Electronic timer (411386)
- HS 6W External Louver Exhaust (45153)
- DHS 05 Humidity/Fan control (494044)
- FIDT 6 Insulated Flex Duct (411064)
- RC6P Roof Cap (79957)

Documents

- E1575 Bathroom Ventilation Solutions EN
- 484089 PB Series IOM EN FR ES