dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Copa

Indoor/Outdoor Pendant 3000K

Model & Size	*Color Temp & CRI*	*Finish*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Title 24*
❍ PD-W55809 9"	3000K 90	❍ BK/GR Black/Gold Ribbed	17W	853	403	Yes
	3000K 90	❍ WT/GR White/Gold Ribbed	17W	853	403	Yes

Example: **PD-W55809-BK/GR**

DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

FEATURES

• Smooth round exterior with weather-resistant finish, contrast ribbing on interior
• Three 12" and one 6" downrods included (additional rods available)
• Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
• Driver concealed within the fixture
• 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum body with silk screen glass diffuser

REPLACEMENT PARTS

RPL-RDOUT06-886-BK - 6" rod - BK finish
RPL-RDOUT12-886-BK - 12" rod - BK finish
RPL-GLA-W55809 - Glass for PD-W55809
RPL-RDOUT06-886-WT - 6" rod - WT finish
RPL-RDOUT12-886-WT - 12" rod - WT finish

FINISHES

Black/ Gold Ribbed

White/ Gold Ribbed

LINE DRAWING

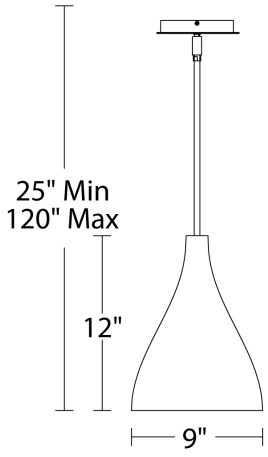

PD-W55809

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2020

dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Copa

Indoor/Outdoor Pendant 3000K

Model & Size	*Color Temp & CRI*	*Finish*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Title 24*
❍ PD-W55813 13"	3000K 90	❍ BK/GR Black/Gold Ribbed	18W	1201	620	Yes
	3000K 90	❍ WT/GR White/Gold Ribbed	18W	1201	620	Yes

Example: **PD-W55813-BK/GR**

DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

FEATURES

- Smooth round exterior with weather-resistant finish, contrast ribbing on interior
- Three 12" and one 6" downrods included (additional rods available)
- Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum body with silk screen glass diffuser

REPLACEMENT PARTS

RPL-RDOUT06-886-BK - 6" rod - BK finish
RPL-RDOUT12-886-BK - 12" rod - BK finish
RPL-GLA-W55813 - Glass for PD-W55813
RPL-RDOUT06-886-WT - 6" rod - WT finish
RPL-RDOUT12-886-WT - 12" rod - WT finish

FINISHES

Black/ Gold Ribbed

White/ Gold Ribbed

LINE DRAWING

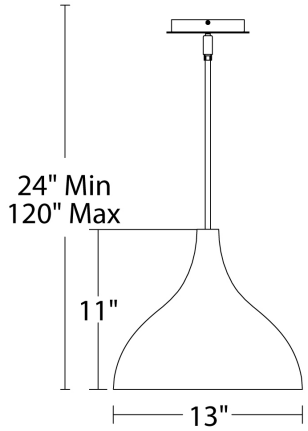

PD-W55813

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2020

dweLED

Fixture Type:

Catalog Number:

Project:

Location:

Copa

Indoor/Outdoor Pendant 3000K

Model & Size	*Color Temp & CRI*	*Finish*	*Watt*	*LED Lumens*	*Delivered Lumens*	*Title 24*
❍ PD-W55817 17"	3000K 90	❍ BK/GR Black/Gold Ribbed	19W	1344	677	Yes
	3000K 90	❍ WT/GR White/Gold Ribbed	19W	1344	677	Yes

Example: **PD-W55817-BK/GR**

DESCRIPTION

The smooth graceful lines of the matte-finished shade contrast with the textured gold interior on this elegant pendant, perfect for dining rooms, kitchens, alcoves, restaurants and hospitality spaces.

FEATURES

- Smooth round exterior with weather-resistant finish, contrast ribbing on interior
- Three 12" and one 6" downrods included (additional rods available)
- Can be mounted on a sloped ceiling, swivel attachment included for seismic protection
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI:	90
Dimming:	ELV: 100 - 5%
Rated Life:	50000 Hours
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard.
Standards:	ETL, cETL, IP65, Title 24 JA8-2016 Compliant, Dark Sky Friendly Wet Location Listed
Construction:	Aluminum body with silk screen glass diffuser

REPLACEMENT PARTS

RPL-RDOUT06-886-BK - 6" rod - BK finish
RPL-RDOUT12-886-BK - 12" rod - BK finish
RPL-GLA-W55813 - Glass for PD-W55817
RPL-RDOUT06-886-WT - 6" rod - WT finish
RPL-RDOUT12-886-WT - 12" rod - WT finish

FINISHES

Black/ Gold Ribbed

White/ Gold Ribbed

LINE DRAWING

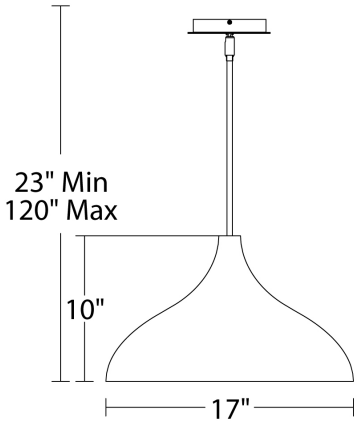

PD-W55817

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. April 2020