
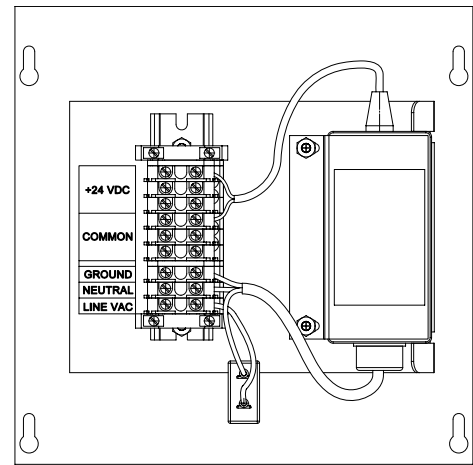


Permanent Install Power Supply

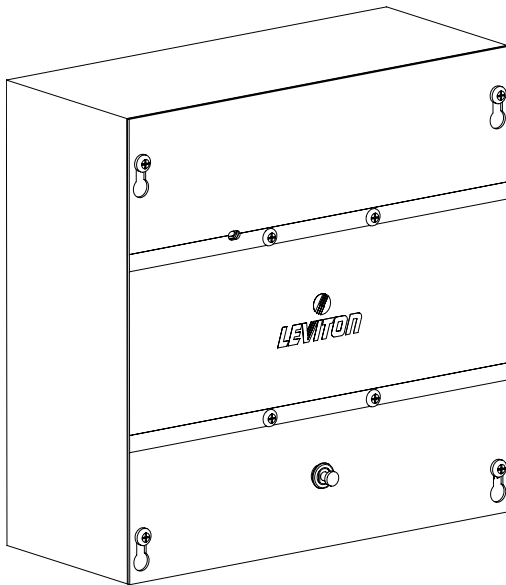

Internal View


This power supply, designed for permanent installation, is used when additional power to peripheral devices is required.

QUICK FACTS

Output Voltage:	+24Vdc
Maximum Output:	2.5a, 60W
Input Voltage:	+90-264Vac, 47-63Hz
Input Current:	<1.6Arms @ +90Vac
Overcurrent Protection:	Voltage Limiting Hiccup mode, auto recovery
Short Circuit Protection:	Hiccup mode, auto recovery
MTBF:	200,000 Hours @ 40C
Dimensions:	10"x10"x4" 25.4cmx24.4cmx10.16cm
Operating Temperature:	0-40C
IP Ratng:	45

APPLICATIONS

- D8000 auxillary power supply
- D4000 auxillary power supply
- Occupancy Sensors auxillary power supply

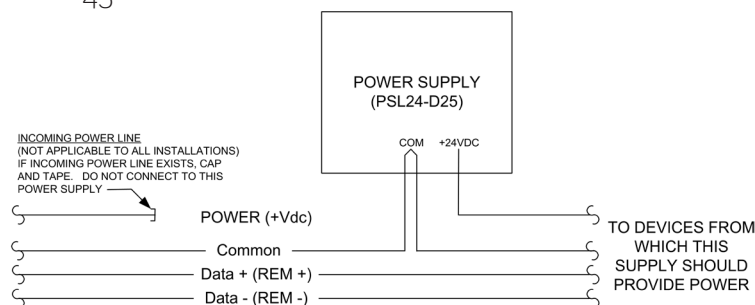

ORDERING INFORMATION

CAT. NO.	DESCRIPTION
PST24-D25	Power Supply, Permanent Install w/Terminals, 24V, 2.5A

Leviton Mfg. Co., Inc. Lighting Management Systems

20497 SW Teton Avenue, Tualatin, OR 97062 1-800-736-6682 Tech Line: 1-800-959-6004 Fax: 503-404-5594 www.leviton.com/lms
© 2009 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.