



Twin 75 Watt Quartz Bullet floods come pre-assembled and pre-wired on C103 Mounting plate. Lamps supplied.

Color: Bronze

Weight: 1.7 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type	T-4
Watts	75W
Shape/Size	N/A
Base	N/A
ANSI	N/A
Hours	1,500
Lamp Lumens	1,500
Efficacy	20 LPW

Ballast Info

Type	N/A
120V	N/A
208V	N/A
240V	N/A
277V	N/A
Input Watts	75W

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Suitable for mounting within 1.2m (4ft) of the ground.

Construction

Housing:

Precision die cast aluminum, 1/2" NPS threaded arm with locking swivel and EZ Grip lock nut fits all standard mounting covers

Lens Gasket:

High-temperature silicone gasket stays in place during relamping

Reflector:

Semi-specular anodized aluminum

Lens:

Thick, tempered glass

Finish:

Formulated for high durability and long-lasting color

Installation:

Twin 75w Flood Kit pre-assembled on C103 plate for easy installation

Electrical

Sockets:

Porcelain bi-pin GY 8 base with gold plated contacts and 250° C socket wires


Other

Replacement Lamps:

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

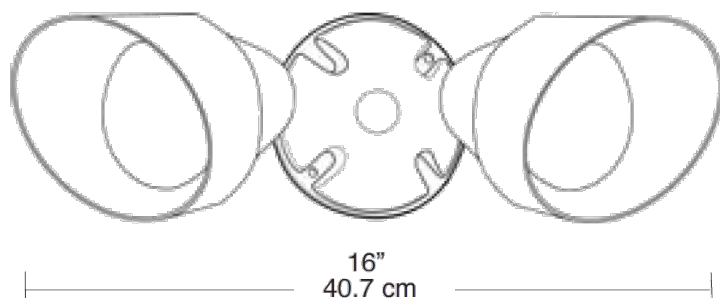

Features

Integra Hood Glare Shield minimizes side glare and hood can be rotated

Highest quality 120 volt quartz lamp included

Thick, tempered glass lens with silicone O-ring gasket

External and internal heat dissipating fins

Arm with locking teeth tightens securely with just finger pressure

Gold contacts prevent lamp and socket fusion due to electrolytic corrosion

Internal and external heat dissipating fins for cooler operation to extend lamp and fixture life