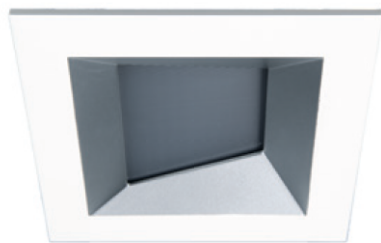


# OCULUX ARCHITECTURAL 3.5" DIM-TO-WARM

Wall Wash - R3CSWT, R3CSWL

WAC LIGHTING

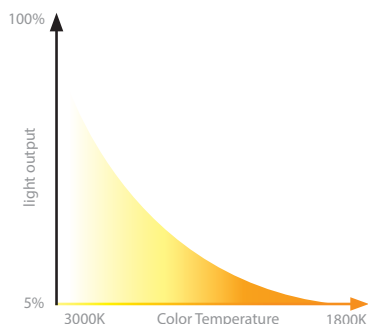


Fixture Type:

Catalog Number:

Project:

Location:



## PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

## FEATURES

- 2 beam angle options included:  
Narrow flood beam pre-installed is optimal optic for wall wash trims
- Non IC and IC-Rated, Airtight, New Construction, Remodel
- Adjustable LED light engine included with housing: Wall Wash Vertical Adjustment to 15°
- Shallow housing under 4" depth
- 5 year warranty

## SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Input Power:** 13W/16W, 120V-277V 50/60Hz
- Dimming:** 100% - 1% TRIAC, ELV  
100% - 5%, 0-10V
- Light Source:** CRI 95 high output COB LED rated life of 50,000 hours
- Mounting:** Retention clips firmly hold trim to housing.  
Cutout: New Construction 4 1/4"x4 1/4", Remodel 3 13/16"x3 13/16"
- Finish:** Powder coated white, haze.
- Ceiling thickness:** 1/2" - 1"
- Operating Temp:** -4°F to 104°F (-20°C to 40°C)
- Standards:** UL & cUL, Wet Location listed, Title 24 JA8-2019 Compliant

Trims (Order Housing Separately)	Model	Power	Beam	Color Temp	Max Lumens	Max CBCP	Finish
<p><b>R3CSWT</b> Square Trim Wall Wash Downlight</p>		13W	Asym	3000K - 1800K	610	N/A	<b>WT</b> White
		16W	Asym		720	N/A	<b>HZWT</b> Haze/White
<p><b>R3CSWL</b> Square Trimless Wall Wash Downlight</p>		13W	Asym		610	N/A	<b>WT</b> White
		16W	Asym		720	N/A	<b>HZ</b> Haze

Example: **R3CSWL-HZ**

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

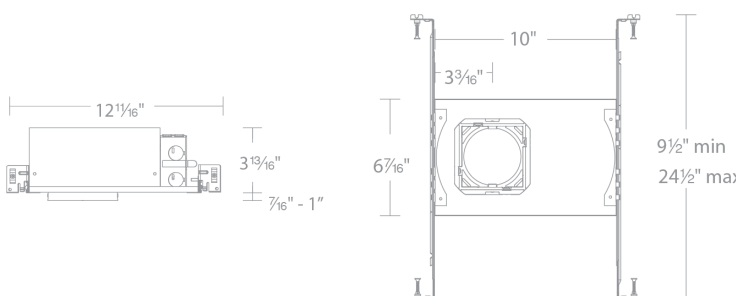
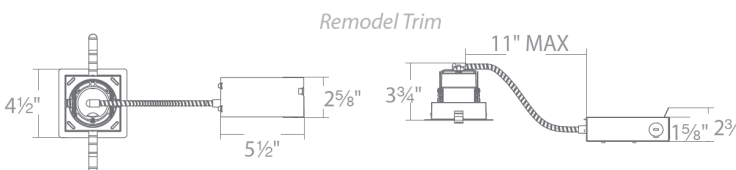
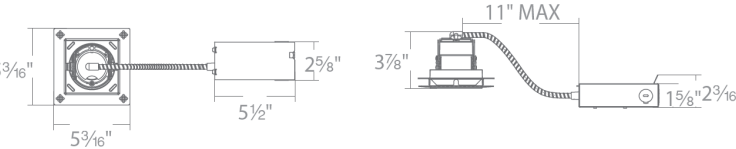
Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

OCULUX ARCHITECTURAL 3.5" DIM TO WARM

Adjustable Downlight - R3CSWT, R3CSWL

WAC LIGHTING

Housing (Required) - Order separately from trims		Model	Power		Color Temp
		<b>R3CSN-13</b> IC-Rated Airtight	13W	WD	3000K-1800K
		<b>R3CSN-16</b> Non IC Airtight	16W		
		<b>R3CSR-16</b> Non IC Airtight	16W	WD	3000K-1800K
		<b>R3CSRL-16</b> Non IC Airtight	16W		

R3CS\_\_-\_\_-WD

Example: R3CSN-13-WD