
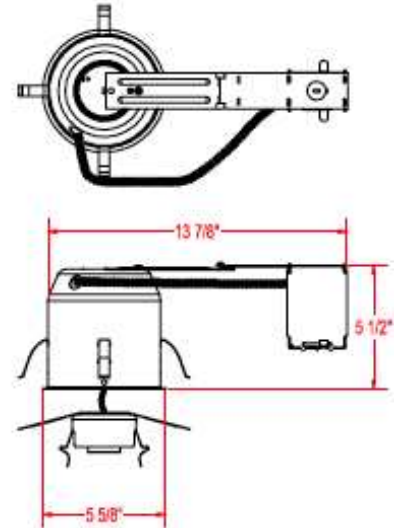


CATALOG NUMBER	TYPE
PROJECT	

5" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING

R5VI-S-R-ICA

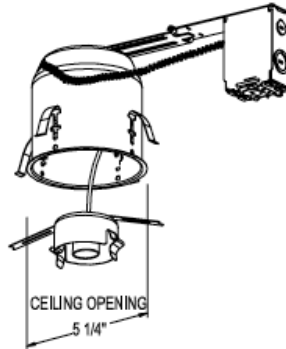

Ordering Matrix

Series	Housing Type
<input type="text"/>	<input type="text"/>
R5VI-S-R – Shallow Depth, Remodel Housing	ICA – Insulation Contact & Air Tight

Ordering Example (series – housing type): R5VI-S-R-ICA

Product Details

Application:	Shallow remodeling housing suitable for insulation contact. Companies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 inch ceiling thickness.
J Box:	Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four integral non-metallic sheathed cable clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.
Mounting:	Housing retained to ceiling with four spring clips. Removable for junction box access.
Material:	20 gauge galvanized steel. Ceramic/nickel-plated socket.
Ratings:	UL & CUL listed.

Specification Features

- Suitable for damp locations.
- 5 year WAC Lighting product warranty.

CATALOG NUMBER	TYPE
PROJECT	

5" PREMIUM LINE VOLTAGE DOWNLIGHT HOUSING

R5VI-S-R-ICA

Compatible Trims (Sold Separately):

R5VT-22 Open Reflector Trim

Finish	Interior	Trim
WT	White	White



R5VT-23 Aperture Cone Trim

Finish	Interior	Trim
SBK	Specular Black	White
SC	Specular Clear	White
WT	White	White



R5VT-24 Step Baffle Trim

Finish	Interior	Trim
BK	Black	White
WT	White	White



R5VT-25 Step Baffle Trim

Finish	Interior	Trim
WT	White	White

