



RAB offers energy efficient fluorescent fixtures for large space lighting including warehouses, factories, and distribution centers. The RBAY delivers the high quality needed for these applications with strong, heavy duty 22 gauge rigid housing with no sharp edges. The superior strong-box protective foam case packaging protects the RBAY so it arrives in perfect shape and ready to install.

Color: N/A

Weight: 15.1 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: T5HO
 Watts: 216W
 Shape/Size: N/A
 Base: N/A
 ANSI: N/A
 Hours: 20,000
 Lamp Lumens: 17,340
 Efficacy: 72 LPW

Ballast Info

Type: Prog. Start
 120V: 2.00A
 208V: 1.20A
 240V: 1.04A
 277V: 0.90A
 Input Watts: 241W
 Efficiency: 90%

Technical Specifications

Listings

UL Listing:

Dry Locations Only. Ceiling Mount Only.

Construction

Housing:

Heavy duty 22 gauge steel housing and wiring box with 1/2" NPS knockouts. Painted white. Easy wiring and maintenance access panel. Includes "Y" hooks.

Reflector:

Aluminum High Performance brilliant bevel segmented reflectors.

Ballast Minimum Starting Temperature:

0°F.

Base:

Medium Bi Pin.

Reflector:

Alanod 320G-E with reflectivity of ≥86%.

Optical

Lamp:

T5HO (not supplied).

Electrical

Ballast:

Programmed Start, High Ambient, Universal Voltage 120 - 277V (suitable for use with occupancy sensors).

Total Watts:

4x54W.

Input Volts:

120-277V.

Input Amps:

.2.0/.85.

Ballast Factor:

1.00.

Other


CRI:

85

Mounts:

Surface or Chain (Y Hooks included).

Dimensions

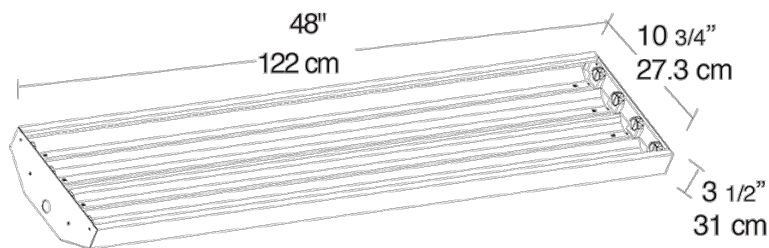

Features

- Qualifies for EPA Act 2005 incentives
- Post-painted, high reflective gloss white powder coat finish
- High Performance, brilliant bevel segmented reflectors
- Easy wiring and maintenance access panel
- Rotary locking lamp holders for vibration security and easy relamping
- Heavy duty 22 gauge steel Rigid strong housing with no sharp edges