

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE — SBL LED wraparound provides a digital lighting platform to deliver general ambient lighting for surface-mount applications. The SBL provides a similar look to that of an existing fluorescent wrap with all of the excellent benefits of LED: energy savings, long life, and maintenance savings. Ideal for closets, storage rooms, and offices.

CONSTRUCTION — Linear side prisms control brightness, pyramidal bottom prisms minimize lamp image. Continuous side flanges on fixture body provide light trap and continuous diffuser support to prevent accidental opening and simplify maintenance. Full depth, white enamel end plates.

Die-formed from code gauge cold-rolled steel. Channel cover snaps into place without the use of tools. Full end cap factory installed to reduce job site labor.

OPTICS — The translucent white diffuser reduces glare and pixilation without impacting performance.

ELECTRICAL — Long-life LEDs, coupled with high-efficiency drivers, provide superior quantity and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000). The LEDs have a CRI of 82.

eldoLED driver options deliver choice of dimming range and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI.

Pair the SBL with the fixture mount Sensor Switch LSXR sensor for additional energy savings when the space is unoccupied. The LSXRHL sensor dims the fixture down to a low-level setting when there is no occupancy. This option is ideal for stairwells, back rooms, and closets due to the low occupancy level in those spaces.

Optional nLight® embedded controls continuously monitor system performance, allow for constant lumen management / compensation function, facilitate simple "plug-and-play" network and controls upgrading via Cat-5 cable. Ballast disconnect provided where required to comply with US and Canadian codes.

LISTINGS — CSA certified to meet U.S. and Canadian standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

Damp listed.

WARRANTY — 5-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.


All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Square-basket LED Wraparound

SBL4

4'
LED

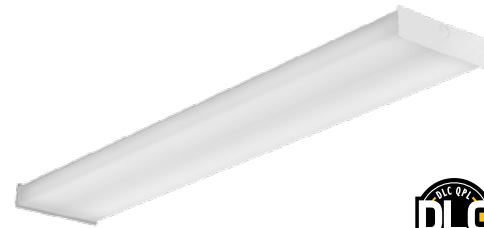

eldoLED®

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: SBL4 40L EZ1 LP840


SBL4							
Series	Lumens ¹	Voltage	Driver	Color temperature	Control	Options	Finish
SBL4 4' LED wrap	30L 3000 lumens	(blank) MVOLT (120-277)	EZ1 eldoLED dims to 1%, 0-10V	LP830 3000 K	(blank) No controls	EL7L LED Emergency battery pack (nominal 700 lumens) ⁵	(blank) White
	40L 4000 lumens	347 347V ²	SLD Step-level dimming ³	LP835 3500 K	N80 nLight with 80% (L80) lumen management	EL14L LED Emergency battery pack (nominal 1400 lumens) ⁵	
	48L 4800 lumens		EOHN eldoLED non-dimming, on/off ³	LP840 4000 K	N80EMG nLight with 80% (L80) lumen management for use with generator supply EM power		
	60L 6000 lumens			LP850 5000 K	N100 nLight without lumen management		
	72L 7200 lumens				N100EMG nLight without lumen management for use with generator supply EM power		
				LSXRHL Sensor Switch® fixture mount sensor with High/Low occupancy operation ⁴			
				LSXR10 Sensor Switch fixture mount sensor with on/off occupancy operation			

Notes

- 1 Approximate lumen output.
- 2 Not available with EL7L, EL14L, or SLD driver.
- 3 Not available with control options.
- 4 Dims to approximately 10% light output when unoccupied. See sensor details on next page.
- 5 Not available with the 72L lumen package.

SBL4 LED Wraparound


Performance Data				
Lumen	Package	Lumens	Input Watts	LPW
30L	LP830	3,104.4	27	115.0
30L	LP835	3,168.7	27	117.4
30L	LP840	3,194.1	27	118.3
30L	LP850	3,234.8	27	119.8
40L	LP830	4,450.0	39	114.1
40L	LP835	4,542.1	39	116.5
40L	LP840	4,578.6	39	117.4
40L	LP850	4,636.9	39	118.9
48L	LP830	5,164.3	48	107.6
48L	LP835	5,271.2	48	109.8
48L	LP840	5,313.6	48	110.7
48L	LP850	5,381.2	48	112.1
60L	LP830	6,187.8	55	112.5
60L	LP835	6,315.9	55	114.8
60L	LP840	6,366.6	55	115.8
60L	LP850	6,447.7	55	117.2
72L	LP830	7,330.3	70	104.7
72L	LP835	7,482.0	70	106.9
72L	LP840	7,542.1	70	107.7
72L	LP850	7,638.2	70	109.1

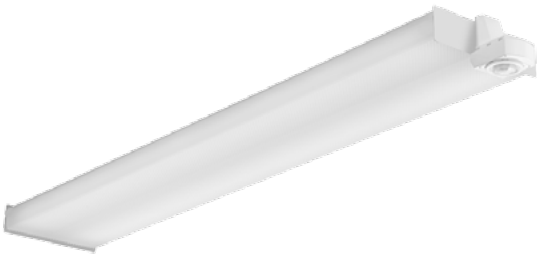

Sensor Switch LSXRHL Sensor	
Lens type:	10 - Low Mount 360° coverage
Dimming:	HL - High/Low Occupancy operation
Min Dim Level:	3V - approximately 10% light output when unoccupied
Time Delay:	5M - 5 minutes

PHOTOMETRICS

SBL4 48L EZ1 LP840, 5313.6 delivered lumens, test no. LTL27402P10, tested in accordance to IESNA LM-79.

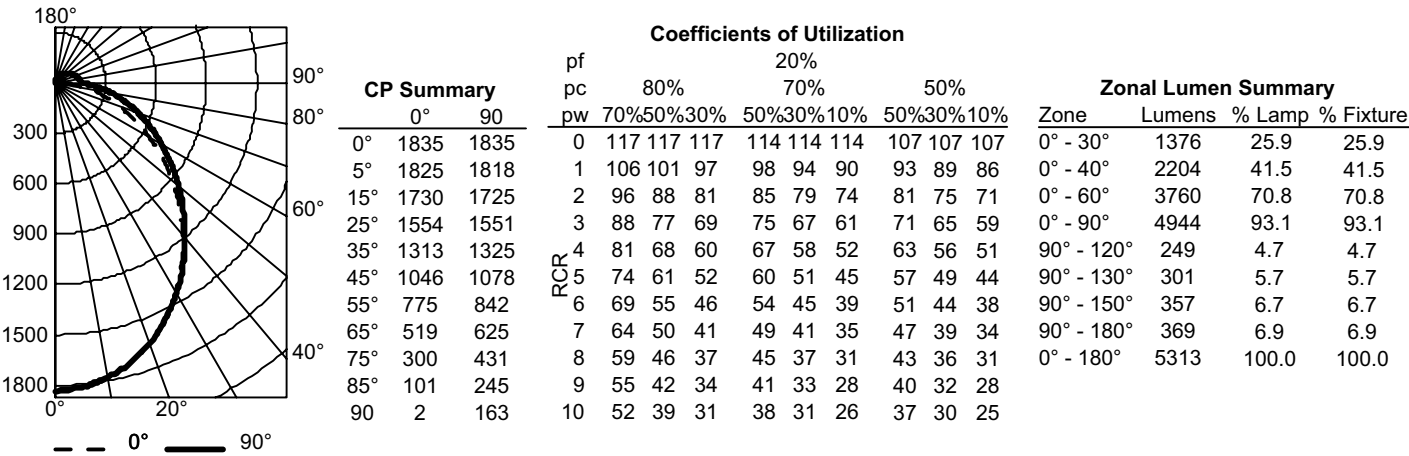

SBL4 LED Wraparound


MOUNTING DATA

Suspension Kit Ceiling Types: F1 for use with most T-bar and screw slot grid ceiling applications. Designed for on-grid and off-grid installations.
F2 for use with recessed or surface-mount horizontal J-box applications.
For unit or row installation; surface or suspend mounting.
Individual installation — One double-stem or two single-stem hangers required.
For aircraft cable, one STACG_, STACGF_, or STACGE_ required for each suspension point.
Note: 2' configurations with emergency option cannot be stem mounted.
See ACCESSORIES below for hanging devices.



DIMENSIONS

All dimensions are inches (centimeters) unless otherwise noted.

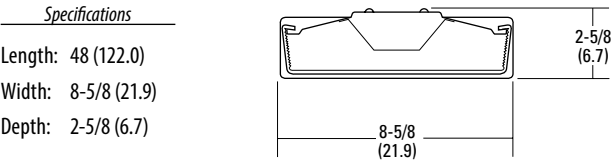

All dimensions are inches (centimeters) unless otherwise indicated.