

Steel Setscrew Connectors



Features/Industry Standards

- UL listed for use with EMT conduit sizes 1/2"-2" only
- UL Listed for use with EMT/IMC/Rigid conduit sizes 2-1/2" - 4"
- High quality tubular steel construction
- Durable, one piece assembly
- UL Listed "concrete tight when taped" sizes 1/2" - 4"
- Connectors available with and without insulated throats
- UL Standard 514B, UL Listed File # E-164116, E-172239, E164116, E172239
- CSA C22.2 No: 18.3
- C-UL Listed for Canada
- Federal Specification A-A-50553




Specification/Ordering Information

Uninsulated Throat

—PRODUCT CODE	CATALOG NUMBER	WEIGHT PER/C	TRADE SIZE	DIMENSION IN INCHES			CARTON COUNT	
				A	B	C	INNER	MASTER
0402-24-00	SC-50	8	1/2"	1.083	0.354	1.142	50	500
0403-22-00	SC-75	12	3/4"	1.547	0.535	1.346	25	250
0404-20-00	SC-100	20	1"	1.823	0.424	1.713	20	200
0405-10-00	SC-125	40	1-1/4"	2.331	0.600	1.685	10	100
0406-10-00	SC-150	40	1-1/2"	2.638	0.650	1.902	10	100
0407-05-00	SC-200	60	2"	2.856	0.650	2.374	5	50
0408-08-00	SC-250	125	2-1/2"	3.268	0.748	3.150	*	8
0409-06-00	SC-300	150	3"	3.740	0.827	3.780	*	6
0410-04-00	SC-350	225	3-1/2"	4.055	0.945	4.291	*	4
0411-04-00	SC-400	250	4"	4.252	0.984	4.791	*	4

Insulated Throat

0412-24-00	SCI-50	8	1/2"	1.083	0.354	1.142	50	500
0413-22-00	SCI-75	12	3/4"	1.547	0.535	1.346	25	250
0414-20-00	SCI-100	20	1"	1.823	0.424	1.713	20	200
0415-10-00	SCI-125	40	1-1/4"	2.331	.0600	1.685	10	100
0416-10-00	SCI-150	40	1-1/2"	2.638	0.650	1.902	10	100
0417-05-00	SCI-200	60	2"	2.856	0.650	2.374	5	50
0418-08-00	SCI-250	125	2-1/2"	3.268	.0748	3.150	*	8
0419-06-00	SCI-300	150	3"	3.740	0.827	3.780	*	6
0420-04-00	SCI-350	225	3-1/2"	4.055	0.945	4.291	*	4
0421-04-00	SCI-400	250	4"	4.252	0.984	4.791	*	4

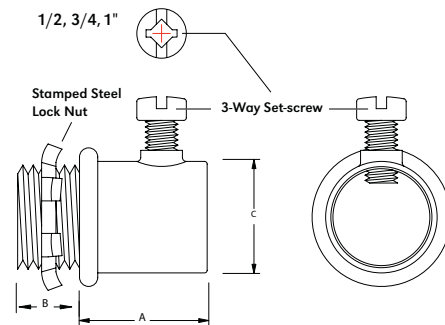

4-Way Set-screw includes 5/8" Hexnut