

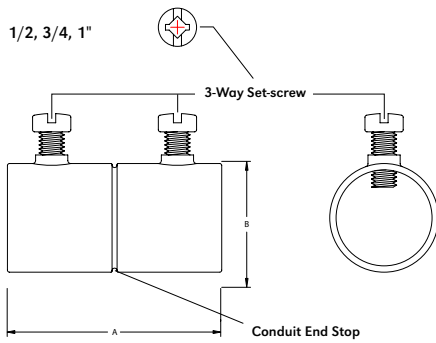


Steel Setscrew Couplings



Features/Industry Standards

- UL listed for use with EMT conduit sizes 1/2"-2" only
- UL Listed for use with EMT/IMC/Rigid conduit sizes 2-1/2" - 4"
- High quality tubular steel construction
- Durable, one piece assembly
- UL Listed "concrete tight when taped" sizes 1/2" - 4"
- UL Standard 514B, UL Listed File # E-164116
- CSA C22.2 No:18.3
- C-UL Listed for Canada
- Federal Specification A-A-50553

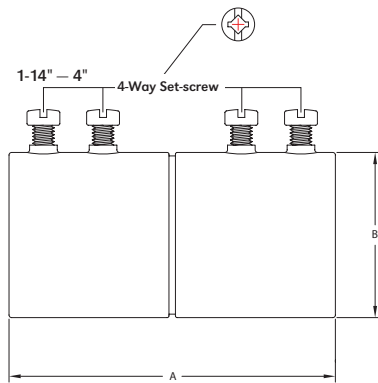

4-Way Set-screw includes 5/8" Hexnut

Specification/Ordering Information

PRODUCT CODE	CATALOG NUMBER	WEIGHT PER/C	TRADE SIZE	DIMENSION IN INCHES		CARTON COUNT	
				A	B	INNER	MASTER
0502-24-00	SK-50	8	1/2"	1.772	0.846	50	500
0503-22-00	SK-75	12	3/4"	2.008	1.083	25	250
0504-20-00	SK-100	25	1"	2.480	1.339	20	200
0505-10-00	SK-125	50	1-1/4"	3.252	1.685	10	100
0506-10-00	SK-150	50	1-1/2"	3.752	1.902	10	100
0507-05-00	SK-200	60	2"	4.000	6.311	5	50
0508-08-00	SK-250	150	2-1/2"	4.252	3.150	*	8
0509-06-00	SK-300	183	3"	4.488	3.780	*	6
0510-04-00	SK-350	225	3-1/2"	4.724	4.291	*	4
0511-04-00	SK-400	275	4"	4.961	4.791	*	4