



Features

- Smoothly mimics the dimming of traditional incandescent
- 3000K temperature at full brightness dims down to 1800K
- 90+ color rendering index
- Up to 262Lm per foot performance
- Cuttable every 3.94" (100mm) and 20ft max run
- Easy installation featuring 3M adhesive backing
- IP54 rating with nano-coating protective layer
- Dimmable (5-100%) with most ELV I TRIAC dimmers
- cULus Listed for indoor dry/damp locations
- 50,000 hours rated life

Available CCT



1800K-3000K

Control Options

- Primary Side Dimming
- Single Color Controls
- Spektrum+™ Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ Standard Grade Warm Dim

Our Warm-To-Dim tape light smoothly mimics the dimming of an incandescent lamp as it is dimmed. At full brightness, the warm dim tape light has a CCT of 3000K and as the light is dimmed, the color changes to an ultra deluxe tone reaching as low as 1800K. Simply control by using a 24V dimmable power supply and compatible dimmer switch - No additional controls required.

Technical Information

Series	STLWD
Input Voltage	24V DC
CCT	1800K-3000K
CRI	90+
Wattage	3W per foot
Lumens	Up to 262Lm per foot
Max Run	20ft
Cuttable	Every 3.94in (100mm)
IP Rating	IP54 - Unjacketed
Dimmable	TRIAC / ELV (5-100%)
Rating	cULus Listed
Rated Life	50,000 hrs

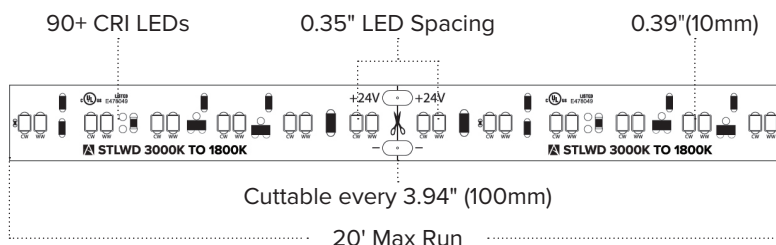



STLWD SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STLWD-3018-16	24V DC	1800K-3000K	16.4ft	262Lm/ft	3W/ft	IP54	90+	3.94" (100mm)
STLWD-3018-CC	24V DC	1800K-3000K	Custom Cut	262Lm/ft	3W/ft	IP54	90+	3.94" (100mm)

STLWD (IP54) 16.4ft Reels include: Attached 3' lead wires | (3) TL-BLKS | (3) TL-CONKITS | (3) TL-2PWR-HD

WARM DIM ACCESSORIES


ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPKPL-REC-TB-5CH	Spektrum+™ Smart Receiver (App Controlled)
LVS-2PIN	2pin Low-Voltage Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Building a Variable CCT Trulux™ System?

See pages (103-104) for compatible Variable CCT controllers & accessories

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light

Smart Receiver Set-up



Smart Device

and / or



Smart Switch
Control



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Smart Receiver



24V Tape Light