


## Fixture Locknuts

### Steel



#### Features

- Shapes available to suit multiple applications

#### Applications

- Secures stem fixtures and threaded conduit


#### Standard Material

- Steel

Catalog Number	UPC	Size	Unit Carton	Ship Case	Weight/Case	A	B
<b>278</b>	11710	<b>1/8"</b>	100	1000	1	.625	.20
<b>279</b>	11720	<b>1/4"</b>	100	1000	1	.715	.20
<b>280</b>	12290	<b>3/8" Square - Heavy</b>	---	200	5	1	.22

## Flexible Fixture Hangers

### 20° Swing from Vertical



#### Features

- Supports weight up to 50 lbs.
- Ball type swivel/swing
- For overhead suspensions
- Protects fixture against wind and vibration damage
- Includes 1/2" & 3/4" reducing bushing to accommodate 1/2" & 3/4" conduit

#### Applications

- Suitable for damp locations
- Permits fixture to swing freely; allows easy disconnect and removal


#### Standard Material

- Steel

Catalog Number	UPC	Size	Ship Case	Weight/Case	
<b>33R</b>	10071	<b>1/2" or 3/4" Round</b>	25	15	Fits 4" Octagon Box
<b>34S</b>	10072	<b>1/2" or 3/4" Square</b>	25	18	Fits 4" Square Box

## All Purpose Connectors

### Twin Screw

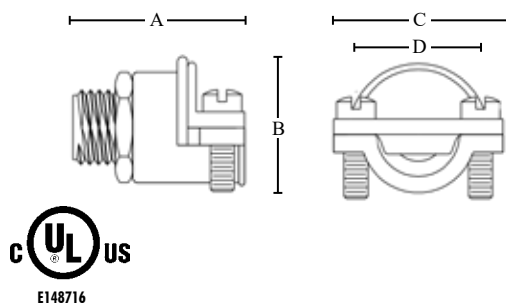

#### Features

- Securely holds cable in low profile fixtures with 1/4" knockouts
- Concrete tight when taped

#### Applications

- For use with non-metallic, AC, MC, sheathed, flexible metal conduit cable both steel and aluminum jacketed
- Mainly used with low silhouette fluorescent fixtures, additional connectors are needed when multiple fixtures are wired in

#### Standard Material

- Zinc die cast

Catalog Number	UPC	Size	KO	Unit Carton	Ship Case	Weight/Case	A	B	Cable Range	End Stop Diameter
<b>NC25</b>	86972	<b>3/8"</b>	1/4"	50	500	31	1.04	.92	.225-.612	.38