



VERSABAR CORPORATION


FLAT FITTINGS

Standard Fitting Dimensions

Width:	1-5/8"	(41.3 mm)
Thickness:	1/4"	(6.3 mm)
Hole Diameter:	9/16"	(14.3 mm)
Hole Spacing On Center:	1-7/8"	(47.6 mm)
Hole Spacing From Ends:	13/16"	(20.6 mm)
Metrics in Parenthesis		
•Unless Otherwise Specified•		

VF-1101

Wt/ea .19 Lbs.
(.086 kg.)




Part Number	Hole Size	Bolt Size
-------------	-----------	-----------

VF-1101-1/4	11/32 (8.7)	1/4 or 5/16
VF-1101-3/8	13/32 (10.3)	3/8
VF-1101-1/2	9/16 (14.3)	1/2
VF-1101-5/8	21/32 (16.7)	5/8
VF-1101-3/4	13/16 (20.6)	3/4
VF-1101-7/8	15/16 (23.8)	7/8

VF-1101-N

Wt/ea .19 Lbs.
(.086 kg.)




Part Number	Hole Size	Bolt Size
-------------	-----------	-----------

VF-1101-N-1/4	11/32 (8.7)	1/4 or 5/16
VF-1101-N-3/8	13/32 (10.3)	3/8
VF-1101-N-1/2	9/16 (14.3)	1/2
VF-1101-N-5/8	21/32 (16.7)	5/8
VF-1101-N-3/4	13/16 (20.6)	3/4

VF-1107

Wt/ea .22 Lbs.
(.10 kg.)




Part Number	U.S. Standard Thread
-------------	----------------------

VF-1107-A	3/8"-16 (9.52)
VF-1107-B	1/2"-13 (12.7)
VF-1107-C	5/8"-11 (15.8)

VF-1102

Wt/ea .16 Lbs.
(.072 kg.)




Part Number	Thread Clearance For Bolt Size "A"
-------------	------------------------------------

VF-1102-3/8	3/8"-16 (9.52)
VF-1102-1/2	1/2"-13 (12.7)
VF-1102-5/8	5/8"-11 (15.8)


VF-1201

Wt/ea .4 Lbs.
(.182 kg.)




VF-1204

Wt/ea .35 Lbs.
(.158 kg.)




VF-1211

Wt/ea .5 Lbs.
(.227 kg.)




VF-1203

Wt/ea .5 Lbs.
(.227 kg.)




VF-1302

Wt/ea .56 Lbs.
(.250 kg.)




VF-1306

Wt/ea .5 Lbs.
(.230 kg.)




VF-1310

Wt/ea .73 Lbs.
(.330 kg.)




VF-1316

Wt/ea .8 Lbs.
(.363 kg.)

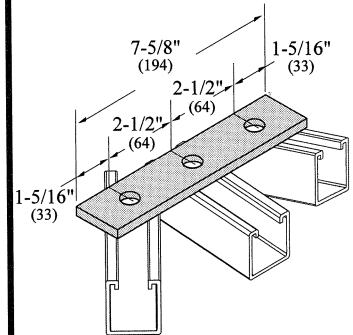


VF-1301

Wt/ea .58 Lbs.
(.263 kg.)




VF-1301-B

Wt/ea .4 Lbs.
(.180 kg.)



VF-1304

Wt/ea .7 Lbs.
(.318 kg.)



VF-1305

Wt/ea .7 Lbs.
(.318 kg.)

