



Large size ceiling mount fixture: 26 - 52 Watt compact fluorescent. Reflector is die formed heavy gauge steel in white finish with clear polycarbonate refractor. Lamp supplied.

Color: N/A

Weight: 6.3 lbs

Project:

Type:

Prepared By:

Date:

Lamp Info

Type: 32w Triple
Watts: 32W
Shape/Size: N/A
Base: N/A
ANSI: N/A
Hours: 12,000
Lamp Lumens: 2,400
Efficacy: 67 LPW

Ballast Info

Type: Elec HPF QT
120V: 0.31A
208V: 0.25A
240V: 0.26A
277V: 0.13A
Input Watts: 36W
Efficiency: 89%

Technical Specifications

Listings

UL Listing:

Suitable for wet locations. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

Electrical

Sockets:

Plug-in type, thermoplastic.

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts.

Optical

Reflector:

Injection molded polycarbonate, designed for maximum structural strength.

Construction

Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

Ballast Minimum Starting Temperature:

0°F.

Other

Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel.

Country of Origin:

Designed by RAB in New Jersey and assembled in the USA by RAB's IBEW Local 3 workers.

Buy American Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Buy American Act.

Recovery Act (ARRA) Compliant:

This product complies with the 52.225-21 "Required Use of American Iron, Steel, and Manufactured Goods-- Buy American Act-- Construction Materials (October 2010).


Trade Agreements Act Compliant:

This product is a COTS item manufactured in the United States, and is compliant with the Trade Agreements Act.

GSA Schedule:

Suitable in accordance with FAR Subpart 25.4.

Dimensions

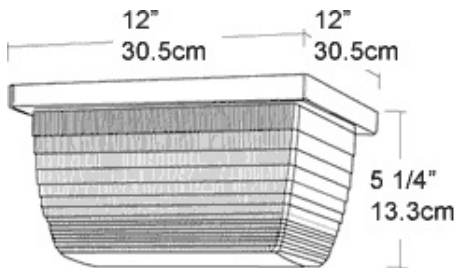

Features

Backboxes available for conduit entry

Both Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractor