

Large size ceiling mount fixture. Vertical lamp HID. Adjustable, 4-way glare guard & "No Bend" conduit entrance. Excellent heat control eliminates heat problems. Housing is die cast aluminum with clear vandalproof polycarbonate refractor. Lamps supplied.

Color: Bronze Weight: 16.4 lbs

Project:	Туре:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type	ED17	Type	R-NPF 120V
Watts	150W	120V	4.5/3.2A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	N/A
Hours	24,000	Input Watts	170W
Lamp Lumens	16,000	Efficiency	88%
Efficacy	94.1 LPW	-	
,			

# **Technical Specifications**

#### Listings

# **UL Listing:**

Suitable for wet locations. Covered Ceiling Mount Only. Fixtures can be wired with 90°C supply wiring if supply wires are routed 3" away from ballast.

## Electrical

#### Sockets:

Medium base 4kv Pulse Rated Glazed porcelain

# HID Quartz restrike:

Add suffix "/QR" to Van3 (50w restrike) or Van5 (100w restrike) for HOT restrike. Provides immediate illumination in case of momentary power failure.

### Optical

#### Refractor:

Injection molded polycarbonate, designed for maximum structural strength

### Construction

### Housings:

Die cast aluminum with powder coat bronze or white finish

# Screws:

Tamperproof center pin Torx-head and slotted Phillips head stainless steel screws provided. Be sure to order your Torx screwdriver (Catalog # VANDRIVER).

#### Reflectors / Backplate:

Heavy gauge cold rolled steel with high reflectance baked white enamel


#### Other

## Patents:

The unique RAB VAN5 is protected by U.S. Patent D547,484; China Patent ZL200630133218.0; Taiwan Patent D121,295 and Canada Patent D115,523.

### **Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

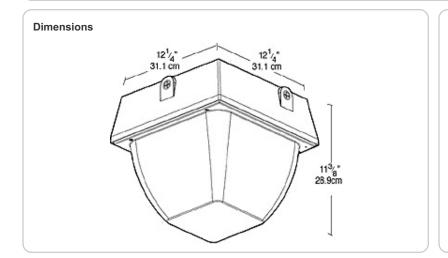

#### **Features**

Vertical lamp for better light disbursement and heat dissipation

Adjustable 4 way Glare Guard

Glare Stopper shield, Vandal proof Center Pin Torx and slotted Phillips head screws supplied

Tough polycarbonate refractor with Die cast aluminum housing

Electronic Fluorescent Ballast with 0°F Starting Temperature

Improved Heat Control