



VERSABAR CORPORATION

FLAT and RIGHT ANGLE FITTINGS

Standard Fitting Dimensions


Width:	1-5/8"	(41.3 mm)
Thickness:	1/4"	(6.3 mm)
Hole Diameter:	9/16"	(14.3 mm)
Hole Spacing On Center:	1-7/8"	(47.6 mm)
Hole Spacing From Ends:	13/16"	(20.6 mm)

Metrics in Parenthesis

•Unless Otherwise Specified•


VF-1506

Wt/ea .94 Lbs.
(.424 kg.)




VF-1602

Wt/ea 1.75 Lbs.
(.791 kg.)




VF-1603

Wt/ea 1.66 Lbs.
(.750 kg.)

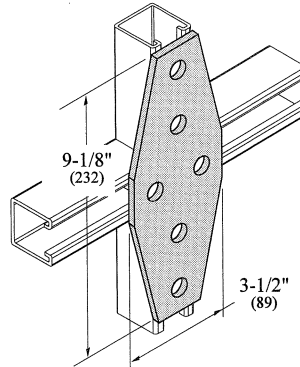


VF-1704

Wt/ea 2.4 Lbs.
(1.08 kg.)

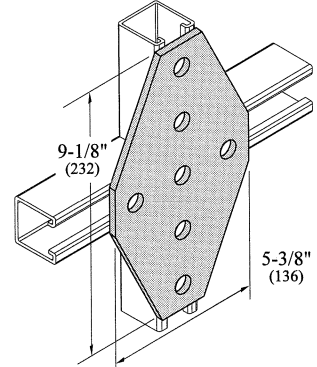


VF-1205

Wt/ea .66 Lbs.
(.30 kg.)




VF-2121 to VF-2124



Part Number	Dim "A" In.	mm	Wt. Each
VF-2121	3-7/8"	(98)	0.61 (.275) kg
VF-2122	5-7/8"	(149)	0.86 (.388) kg
VF-2123	7-7/8"	(200)	1.07 (.483) kg
VF-2124	9-7/8"	(250)	1.34 (.605) kg


VF-2201

Wt/ea .4 Lbs.
(.180 kg.)




VF-2202

Wt/ea .4 Lbs.
(.180 kg.)




VF-2202-T

Wt/ea .4 Lbs.
(.18 kg.)




VF-2209-N

Wt/ea .37 Lbs.
(.17 kg.)




VF-2204-N

Wt/ea .34 Lbs.
(.15 kg.)




VF-2205-A to -C



Part Number	Dim "A"	Wt. Ea.
VF-2205-A	3" (76.2)	.50 # (.226) kg
VF-2205-B	3-1/2" (88.9)	.56 # (.253) kg
VF-2205-C	4" (102)	.63 # (.285) kg


VF-2304

Wt/ea .62 Lbs.
(.280 kg.)




VF-2304-B

Wt/ea .59 Lbs.
(.266 kg.)



VF-2305

Wt/ea .62 Lbs.
(.280 kg.)



VF-2307

Wt/ea .62 Lbs.
(.280 kg.)

