



VERSABAR CORPORATION


WING and SPLICE FITTINGS

Standard Fitting Dimensions

Width:	1-5/8"	(41.3 mm)
Thickness:	1/4"	(6.3 mm)
Hole Diameter:	9/16"	(14.3 mm)
Hole Spacing On Center:	1-7/8"	(47.6 mm)
Hole Spacing From Ends:	13/16"	(20.6 mm)
Metrics in Parenthesis		
•Unless Otherwise Specified•		


VF-3807

Wt/ea 2.26 Lbs.
(1.03 kg.)



VF-2420-L * VF-2420-R

Wt/ea 1.7 Lbs.
(.768 kg.)




Collar section fits:
VA-1, VA-2 & VA-12

* Left Hand Version Illustrated, Right Opp.

VF-3304-R* VF-3304-L


Wt/ea 1.7 Lbs.
(.768 kg.)



* Right Hand Version Illustrated, Left Opp.


VF-7802

Wt/ea 2.2 Lbs.
(.996 kg.)




VF-3805-L

Wt/ea 2.42 Lbs.
(1.09 kg.)



VF-3805-R


Wt/ea 2.42 Lbs.
(1.09 kg.)



VF-5409

Wt/ea .63 Lbs.
(.284 kg.)


Allows splicing of channel
through P1.5 perforations



VF-5409-4


Wt/ea .41 Lbs.
(.185 kg.)

Allows splicing of channel
through P1.5 perforations

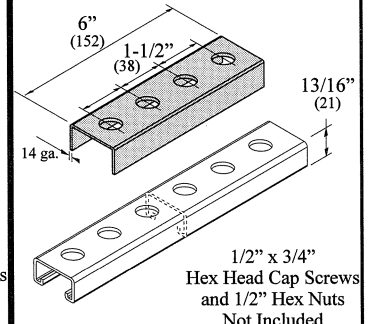

VF-5304-4


Wt/ea 1.3 Lbs.
(.587 kg.)



Fits VA-4, VA-5 & VA-13 channels

VF-5304


Wt/ea 1.95 Lbs.
(.881 kg.)



Fits VA-1 & VA-2 channels

VF-5204-4


Wt/ea .85 Lbs.
(.384 kg.)



Fits VA-4, VA-5 & VA-13 channels

VF-5204


Wt/ea 1.29 Lbs.
(.583 kg.)



Fits VA-1 & VA-2 channels

VF-5204-3


Wt/ea 1.72 Lbs.
(.777 kg.)



Fits VA-3 channel

VF-5704-B


Wt/ea 1.11 Lbs.
(.502 kg.)



Fits VA-1P1.5 & VA-2P1.5 channels

VF-5402-4


Wt/ea 1.75 Lbs.
(.791 kg.)



Fits VA-4, VA-5 & VA-13 channels

VF-5402

Wt/ea 2.65 Lbs.
(1.19 kg.)

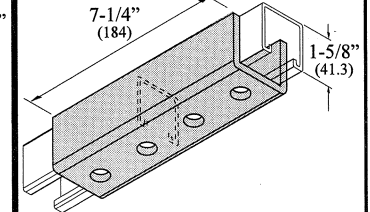

Fits VA-1 & VA-2 channels