





VP-9000 UNIVERSAL Series Clamps "ASSEMBLED STYLE"

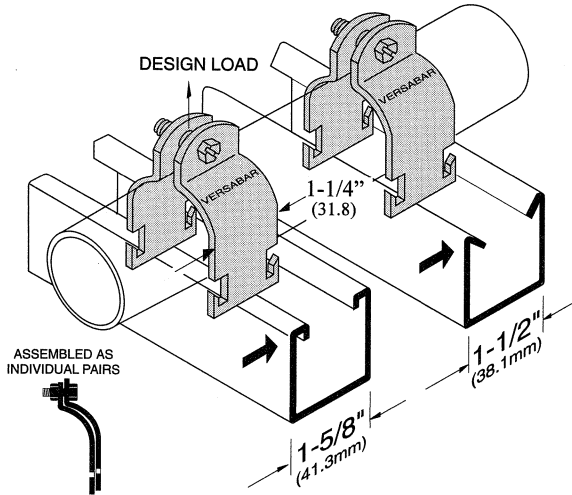

Fits 1-5/8" (41.3) & 1-1/2" (38.1) Wide Channels
Fits Rigid, E.M.T. & I.M.C. of the same size

Part #	Nominal Size	Material Thickness	Wt / C Pr.		Load Rating	
			Lbs.	kg	Lbs.	kN
VP-9037	3/8"	16 ga. (1.5)	11.0	(5.0)	400	(1.8)
VP-9050	1/2"	16 ga. (1.5)	12.2	(5.5)	400	(1.8)
VP-9075	3/4"	16 ga. (1.5)	12.5	(5.7)	400	(1.8)
VP-9100	1"	14 ga. (1.9)	18.5	(8.4)	600	(2.7)
VP-9125	1-1/4"	14 ga. (1.9)	19.2	(8.7)	600	(2.7)
VP-9150	1-1/2"	14 ga. (1.9)	19.5	(8.9)	600	(2.7)
VP-9200	2"	14 ga. (1.9)	25.0	(11.4)	600	(2.7)
VP-9250	2-1/2"	12 ga. (2.6)	39.0	(17.7)	800	(3.6)
VP-9300	3"	12 ga. (2.6)	44.0	(20.0)	800	(3.6)
VP-9350	3-1/2"	11 ga. (3.0)	60.0	(27.2)	1000	(4.4)
VP-9400	4"	11 ga. (3.0)	62.0	(28.1)	1000	(4.4)

VP-9000-UA UNIVERSAL Series Clamps "UNASSEMBLED STYLE"

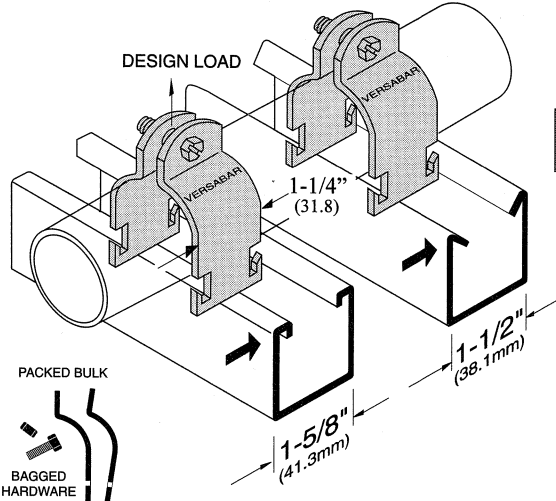


Fits 1-5/8" (41.3) & 1-1/2" (38.1) Wide Channels
Fits Rigid, E.M.T. & I.M.C. of the same size

Part #	Nominal Size	Material Thickness	Wt / C Pr.		Load Rating	
			Lbs.	kg	Lbs.	kN
VP-9037-UA	3/8"	16 ga. (1.5)	11.0	(5.0)	400	(1.8)
VP-9050-UA	1/2"	16 ga. (1.5)	12.2	(5.5)	400	(1.8)
VP-9075-UA	3/4"	16 ga. (1.5)	12.5	(5.7)	400	(1.8)
VP-9100-UA	1"	14 ga. (1.9)	18.5	(8.4)	600	(2.7)
VP-9125-UA	1-1/4"	14 ga. (1.9)	19.2	(8.7)	600	(2.7)
VP-9150-UA	1-1/2"	14 ga. (1.9)	19.5	(8.9)	600	(2.7)
VP-9200-UA	2"	14 ga. (1.9)	25.0	(11.4)	600	(2.7)
VP-1250/9250-UA	2-1/2"	12 ga. (2.6)	39.0	(17.7)	800	(3.6)
VP-1300/9300-UA	3"	12 ga. (2.6)	44.0	(20.0)	800	(3.6)
VP-1350/9350-UA	3-1/2"	11 ga. (3.0)	60.0	(27.2)	1000	(4.4)
VP-1400/9400-UA	4"	11 ga. (3.0)	62.0	(28.1)	1000	(4.4)

VP-1000 RIGID Series Pipe Clamps

Fits All 1-5/8" (41.3) Wide Channels

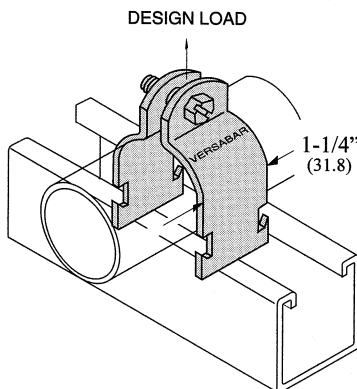

Also Available: SS 304 / 316, Alum., and HDGA

Part #	Pipe Size	Actual O.D.		Material Thickness	Wt / C Pr.		Load Rating	
		In.	mm		Lbs.	kg	Lbs.	kN
VP-1037	3/8"	.675"	(17.1)	16 ga. (1.5)	9.5	(4.3)	400	(1.8)
VP-1050	1/2"	.840"	(21.3)	16 ga. (1.5)	10.5	(4.8)	400	(1.8)
VP-1075	3/4"	1.050"	(26.7)	14 ga. (1.9)	14.5	(6.6)	600	(2.7)
VP-1100	1"	1.315"	(33.4)	14 ga. (1.9)	16.5	(7.5)	600	(2.7)
VP-1125	1-1/4"	1.660"	(42.2)	14 ga. (1.9)	19.0	(8.6)	600	(2.7)
VP-1150	1-1/2"	1.900"	(48.3)	12 ga. (2.6)	30.0	(13.6)	800	(3.6)
VP-1200	2"	2.375"	(60.3)	12 ga. (2.6)	33.0	(15.0)	800	(3.6)
VP-1250/9250-UA	2-1/2"	2.875"	(73.0)	12 ga. (2.6)	39.0	(17.7)	800	(3.6)
VP-1300/9300-UA	3"	3.500"	(88.9)	12 ga. (2.6)	44.0	(20.0)	800	(3.6)
VP-1350/9350-UA	3-1/2"	4.000"	(101.6)	11 ga. (3.0)	60.0	(27.2)	1000	(4.4)
VP-1400/9400-UA	4"	4.500"	(114.3)	11 ga. (3.0)	62.0	(28.1)	1000	(4.4)
VP-1450	4-1/2"	5.000"	(127.0)	11 ga. (3.0)	72.0	(32.7)	1000	(4.4)
VP-1500	5"	5.563"	(141.3)	11 ga. (3.0)	78.0	(35.4)	1000	(4.4)
VP-1600	6"	6.625"	(168.3)	10 ga. (3.4)	96.0	(43.6)	1000	(4.4)
VP-1800	8"	8.625"	(219.1)	10 ga. (3.4)	118.0	(53.6)	1000	(4.4)