




VX-7042 VX-7042-A

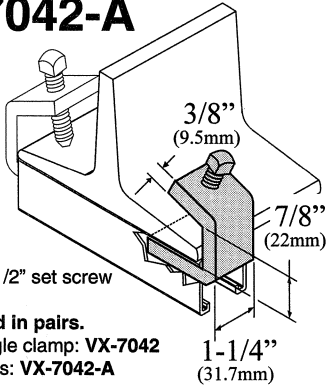

Steel Clamp
with 1/2" x 1-1/2" set screw


Must be used in pairs.

Part # for single clamp: **VX-7042**

Part # for pairs: **VX-7042-A**

| Design Load used in pairs | Wgt. "C" Lbs. kg |
|------------------------------|---------------------|
| 1000# (4.5 kN) | 60# (27.2) |

VF-2102 VF-2102-AL



Steel Clamp

Must be used in pairs.

Part # without mounting hardware: **VF-2102**


Part # with mounting hardware: **VF-2102-AL**

*(1/2" x 1-1/2" HHCS and VN-1050 included)

| Design Load Used in pairs | Mounted On | Wgt. "C" Lbs. kg |
|------------------------------|--------------|---------------------|
| 600# (2.7 kN) | VA-1 or VA-3 | 25# (11) |
| 500# (2.2 kN) | VA-2 | |

VX-7002-AL


Steel clamp with
1/2" x 1-1/2"
Set Screw

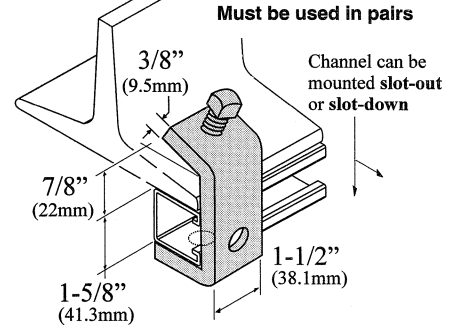

Maximum Beam
Flange Thickness
is 7/8" (22)

| Design Load used in pairs | Wgt. "C" Lbs. kg |
|------------------------------|---------------------|
| 500# (2.2 kN) | 110# (50) |

VX-7043 & VX-7043-A

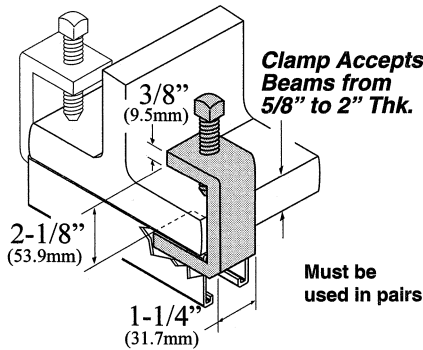

Part # for single clamp: **VX-7043**

Part # for pair of clamps: **VX-7043-A**

Steel Clamp
with 1/2" x 2"
set screw


| Design Load used in pairs | Wgt. "C" Lbs. kg |
|------------------------------|---------------------|
| 1000# (4.5 kN) | 80# (36) |

VX-7044-1/2

Wt "C" 91 Lbs.
(.41kg.)

Heavy Beam 1/2" Rod Suspension Clamp


Clamp Accepts
Beams from
5/8" to 2" Thk.

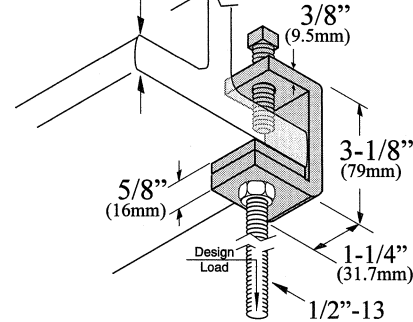

Steel clamp with 1/2"-13 threaded base
Design Load 800 lbs. (3.6kN)
1/2" x 2" set screw

VX-7037 Series

Load Rating
Used in pairs:
400# (1.8 kN)

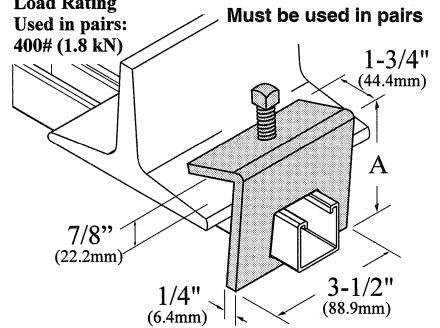


Steel Clamp with 1/2" x 1-1/2" Set Screw

| Part # | For Channel | Dim "A" In mm | Wgt. "C" Lbs. kg |
|-------------|-------------|------------------|---------------------|
| VX-7037-A | VA-1 or 2 | 3-1/2" (88.9) | 110# (50) |
| VX-7037-A-4 | VA-4 or 5 | 2-11/16" (68.3) | 100# (45) |
| VX-7037-A-3 | VA-3 | 4-3/8" (111) | 120# (54) |

VX-7038-A (short) VX-7038-B (long)


3/8"-16 Threaded U-Bolt and Hex Nuts Included

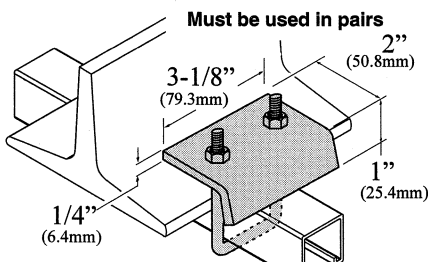

Design Load 1000# When used in pairs

| Part # | Fits Channel Depths | Wgt. "C" Lbs. kg |
|-----------|------------------------|---------------------|
| VX-7038-A | Up to: 1-5/8" (41.3) | 85# (39) |
| VX-7038-B | Over : 1-5/8" (41.3) | 85# (39) |

VX-7050-A (short) VX-7050-B (long)

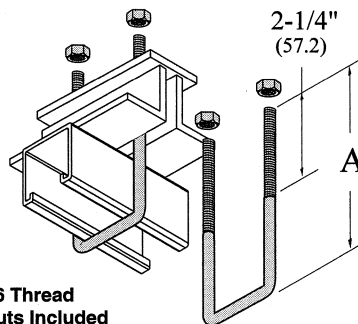


3/8"-16 Thread
Hex Nuts Included

| Part # | Dim "A" In mm | Wgt. "C" Lbs. kg |
|-----------|------------------|---------------------|
| VX-7050-A | 3-1/2" (89) | 24# (10.8) |
| VX-7050-B | 5" (127) | 34# (15.4) |


VX-7715-A

Wt "C" 120 Lbs.
(.54 kg.)

Sold as a "set"



Design Load for Slip
800# (3.6 kN)



Column mounts are sold as a matched pair. Jacking screw provides pressure to hold channel between beam flanges. Hardened tips on pin side bite into opposite side. Channel can be mounted with slot facing up, down or out.