



Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	15W
120V	0.14A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	1,500 lm
Input Watts	15W	Efficacy	100

Technical Specifications			
Performance		Electrical	
Product Type: Deep Regress Wafer		THD: ≤20%	
Description: Deep regress remote driver downlight looks like a traditional recessed retrofit but without the need of a traditional downlight housing.		Power Factor: ≥0.9	
Wattage Equivalency: 120W Incandescent		Dimmable: Yes, dims down to 10% on compatible TRIAC/ELV systems. See Dimmer Compatibility List on rablighting.com.	
Input Wattage: 15W		Input Voltage: 120V 120-277V when paired with HAD6/D10 driver, sold separately	
Lumens: 2700K @ 1,525lm; 3000K @ 1,562lm; 3500K @ 1,627lm; 4000K @ 1,662lm; 5000K @ 1,685lm		Operating Frequency: 60 Hz	
Efficacy: 2700K @ 108lm/W; 3000K @ 112lm/W; 3500K @ 118lm/W; 4000k @ 119lm/W; 5000K @ 118lm/W		Input Current @ 120V (mA): 137mA	
L70 Lifespan: 50,000-Hour LED lifespan based on IES LM-70 results		Operating Temperature: -4°F to 104°F (-20°C to 40°C)	
Driver: Constant Current, Class 2, 60 Hz, 120V: 0.14A		Flicker: 5%	
		Optical	
		Beam Angle: 90°	
		LED Characteristics	
		Color Temperature: Field adjustable via dip switch 2700K/3000K/3500K/4000K/5000K	
		Color Accuracy (CRI): >90 CRI	
		R9 Value: High color performance with R9 greater than or equal to 50	
		Color Consistency: 4-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color	
		Color Stability: LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period	
		Color Uniformity: RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.	

Technical Specifications (continued)

Installation

Mounting:

Utilizes a remote driver with built-in junction box and quick disconnect; Eliminates the need for traditional downlight housings

Construction

Size:

6"

Shape:

Round

Finish:

White

Enclosure Material:

Metal

Trim Style:

Regressed Smooth

Remote Driver/ Junction Box:

Aluminum driver / junction box with captive hinged junction box cover.

Listed for (6) #12 AWG 90°C splice conductors, 2-in, 2-out plus (2) ground.

Integral keyhole mounting slots facilitate direct mounting to building structure or new construction mounting frame.

Lens:

Polycarbonate light diffuser distributes light evenly and smoothly for general lighting applications

Cut Out Template Size:

6 5/16"

Air Tight:

Housing certified Air Tight as per ASTM E283

Compliance

Listings:

UL Listed

Environment:

Suitable for use in dry, damp, and wet environments.

IC Rated:

Suitable for direct contact with insulation.

Type IC inherently protected, suitable for direct contact to air permeable insulation and cULus listed for damp locations. Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013.

Energy Star Approved:

This product is ENERGY STAR® Version 2.2 Certified.

Energy Star ID:

2508118

Certification Model Number:

DLW0101(WFD6)

T20 Compliant:

No, this product does not meet California Title 20 requirements.

California Title 24 JA8 Compliant:

Can be used to conform with the requirements of California Title 24 Part 6

California Energy Commission (CEC) Status:

Lawful for Sales in California

NEC Compliant:

Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

RoHS:

Mercury and UV free. RoHS-compliant components.

FCC:

Complies with Part 15 of the FCC Rules

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Other

Accessories:

[DLPLATE/WFR3468/NB](#)

Mounting Plate w/nailer bar

[DLPLATE/WFR3456](#)

Mounting plate for 3", 4", 5" and 6"

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Note:

All values are typical (tolerance +/- 10%)

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

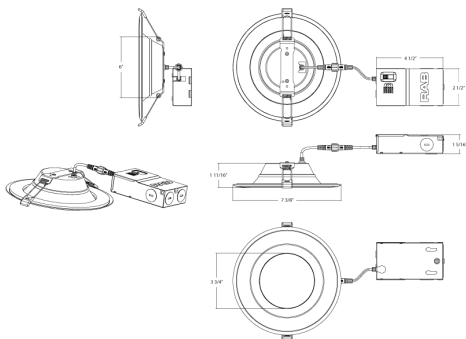

Features

- 5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)
- No recessed housing or j-box required
- Dimmable on TRIAC/ELV, see Dimmer Compatibility List
- Suitable for indoor and outdoor use in dry, damp, and wet environments
- 50,000 hr lifespan and 5-year no-compromise warranty

Ordering Matrix

Family	Size (Wattage)	Shape	CRI/Color Temp	Voltage	Finish	Trim
WFD	6					
	4 = 4" (13W) 6 = 6" (15W)	Blank = Round	Blank = 90CRI, 2700K/3000K/3500K/4000K/5000K CCT Adjustable	Blank = 120V	Blank = White	Blank = Smooth B = Baffle