



Project:	Type:
Prepared By:	Date:

Driver Info Type Constant Current 120V N/A 208V N/A 240V N/A 277V N/A Input Watts 9W	LED Info Watts 9W Color Temp 2700K/3000K/3500K/4000K/5000K Color Accuracy 90 CRI L70 Lifespan 50,000 Hours Lumens 550 lm Efficacy 61.11111111
--	--

Technical Specifications

Performance

Description:
This 4-inch canless wafer downlight has an ultra low-profile design and 5 field adjustable color temperatures making them a flexible solution for both new construction and retrofit applications. The remote driver box has quick connectors, knockouts, and plenty of space for daisy chain wiring or adding an emergency backup unit.

Product Type:
Recessed Downlights

Input Wattage:
9W

Lumens:
550lm

L70 Lifespan:
50,000-Hour LED lifespan based on IES LM-70 results

Dimming:
Yes, See Dimmer Compatibility List

Compliance
UL Listed:
Suitable for wet locations

NEC Compliant:
Suitable for use in closets. Compliant with NEC Sec. 410.16 (A)(1) and 410.16 (C3).

Trade Agreements Act Compliant:
This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical
THD:
≤20%

Power Factor:
0.9

Operating Frequency:
60 Hz

Construction
Material:
Plastic

Trim Style:
Baffle

Shape:
Square


Mounting:
Recessed ceiling

Operating Temperature Range:
-20°C - 40°C (-4°F - 104°F)

Other
Warranty:
RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Buy American Act Compliance:
RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

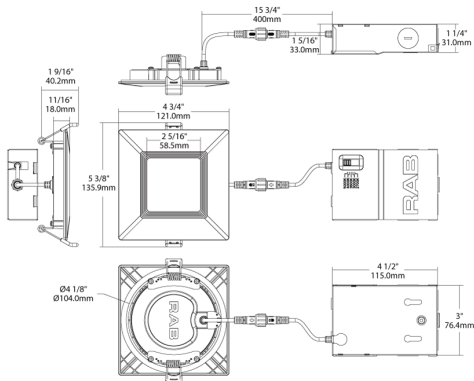

Features

- 5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)
- Super slim Edge-lit fixture for thin fixture depth
- No recessed housing or J-box required
- New construction or retrofit applications
- UL wet location rated
- Smooth diffused uniform light distribution
- Dimmable down to 5% on compatible dimmers
- Spring loaded retention clips
- Robust, die cast aluminum construction
- IC and airtight rated
- 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Voltage	Finish	Trim	Depth
WFRL	4	S	9	9FA	120	W	B	
	3 = 3"	R = Round	6 = 6W	9FA = 90 CRI, 2700K/3000K/3500K/4000K/5000K	120 = 120V	W = White	B = Baffle	Blank = Standard
	4 = 4"	S = Square	9 = 9W	9CCT = 90 CRI, 2700K/3000K/3500K/4000K/5000K	D = 120V/277V		S = Smooth	S = Shallow
	5 = 5"		10.5 = 10.5W					
	6 = 6"		12 = 12W					
	8 = 8"		13 = 13W					
			14 = 14W					
			23 = 23W					