

WP2H175QT



JOB NAME: _____

DATE: _____

TYPE: _____

DESCRIPTION

Mid sized wallpack for 70 to 150 watts HPS, 70-175 watts Metal Halide, or 84 watts (2x24) Compact Fluorescent. All aluminum precision die cast construction with tempered glass refractor. Lamp included.

SPECIFICATIONS

Cutoff Lens:

Tempered glass.

Finish:

Chip and fade resistant epoxy powder coating.

Housing:

Die cast aluminum, 1/2" NPS tapped holes top, both sides and back for conduit or photocontrol. Hinged refractor frame. Continuous silicone rubber gasket.

Reflector:

Specular anodized aluminum, removable for installation. Symmetrical light pattern maximizes distance between fixtures.

Refractor:

Prismatic optics designed to minimize glare and throw light down and out. Heat resistant borosilicate glass.

UL Listing:

Suitable for wet locations. HID fixtures can be wired with 90° C supply wiring if supply wires are routed 3" away from ballast.

Patents:

RAB sensor and fixture designs are protected under U.S. and International Intellectual Property laws

Quad Tap:

Fixture works with 120, 208, 240 and 277 Volts


Color:

Bronze

Weight:


18.45

DIMENSIONS

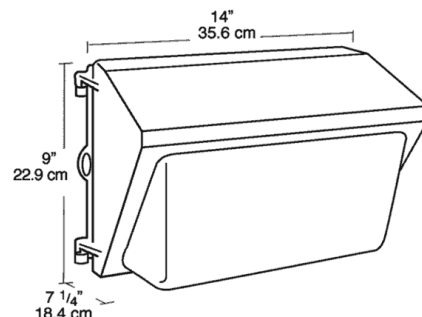

PHOTOMETRICS

150w HPS @10' Mounting Height

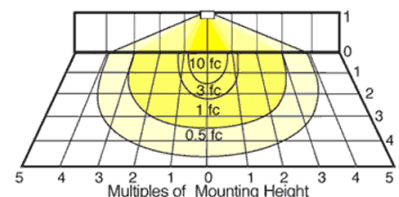

Mounting Height	Multiplier	Watts	Multiplier	HPS	MH	CFL
8'	1.6	175		.9		
10'	1.0	150PS		.9		
12'	.7	150	1.0	.8		
16'	.4	125PS		.7		
20'	.25	100	.6	.6		
		70	.4	.4		
		42		.2		
		84		.4		

ORDERING INFORMATION

Metal Halide

Lamp supplied with fixture

Total Watts	Lamp Type	Lamp Base	Ballast	Starting Amps/ Operating Amps	Input Watts	LAMP ANSI	Initial Lumens	Lamp Hours
175	ED17	Medium	CWA HPF QT	120V 1.3/1.8 208V .8/1.1 240V .7/1.9 277V .6/1.8	210	M57	13500	10000

Factory Installed Options

Add suffix to Catalog Number

Tamperproof screws (/TP)

Swivel Photocontrol (/PCS)

Single fusing for 120 and 277 volt (/F)

Double fusing for 208 and 240 volt (/FF)

Button Photocontrol wired for 208 - 277 volt (/PC2)

Button Photocontrol (/PC)

Note: Specifications may change without notice

RAB Lighting, Inc. • 170 Ludlow Ave • Northvale, NJ 07647 • Tel: 888 RAB-1000 • Fax: 888 RAB-1232 • www.rabweb.com

© 2007