

ELEMENTUM – model: WS-72 (120V)

dwelLED™ LED Vanity



WAC LIGHTING
Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

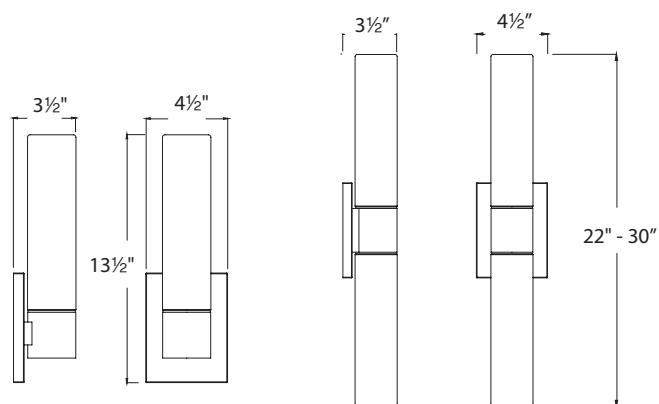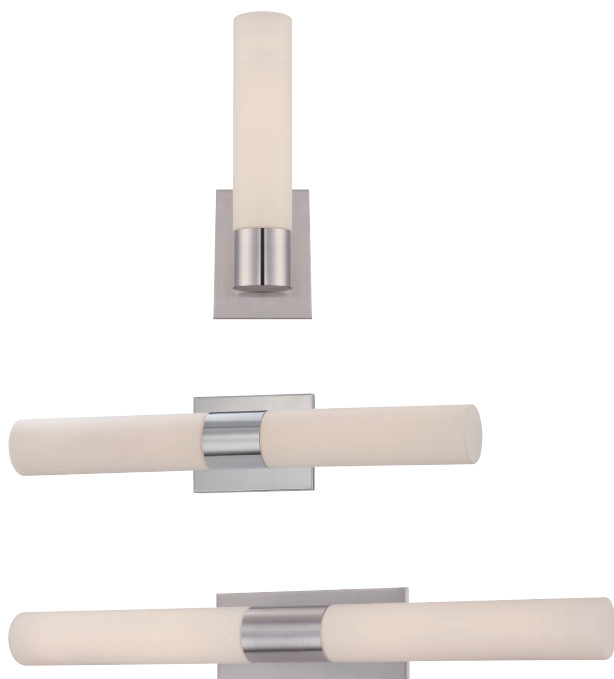

PRODUCT DESCRIPTION

The uniform cylinder transitions from cased etched opal glass to perfectly plated metal seamlessly. Wall mounted vertically on either side of a mirror or place one horizontally above for flattering diffused illumination.

FEATURES

- IP65 rated, ETL & cETL wet location listed for indoor application
- Mouth blown etched triplex glass
- Vertical or horizontal mount
- ADA Compliant
- Meets 2013 California Title 24 Efficiency
- No driver or transformer needed
- Smooth and continuous ELV dimming
- 80,000 hour rated life
- Color Temp: 2700K (3000K and 3500K available as special order)
- 90 CRI

SPECIFICATIONS

- **Construction:** Steel

ORDERING NUMBER

Model#	Voltage	Length	Watt	LED Lumens	Delivered Lumens	Finish
WS-7213	120V	13"	15.5W	1118	730	BN Brushed Nickel CH Chrome
WS-7222	120V	22"	30.5W	2236	1505	
WS-7230	120V	30"	39.5W	2925	1955	



Example: **WS-7222-BN**

For alternate color temperature, special order adding 30 or 35: **WS-7222-30-BN**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

ELEMENTUM – model: WS-72F(277V)

dwelLED™ LED Vanity

WAC LIGHTING
Responsible Lighting®

WS-7213F

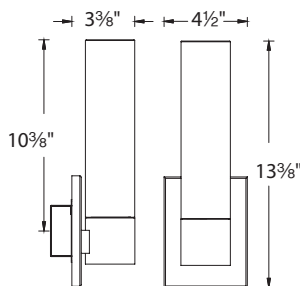


Fixture Type:

Catalog Number:



Project:

Location:

WS-7222F

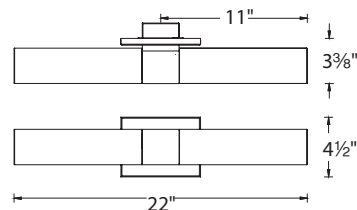

WS-7230F

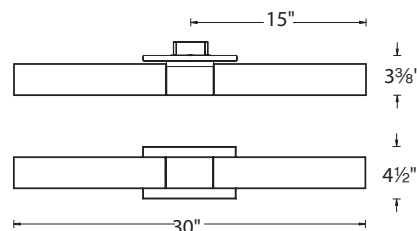

PRODUCT DESCRIPTION

The uniform cylinder transitions from cased etched opal glass to perfectly plated metal seamlessly. Wall mounted vertically on either side of a mirror or place one horizontally above for flattering diffused illumination.

FEATURES

- IP65 rated, ETL & cETL wet location listed for indoor application
- Mouth blown etched triplex glass
- Vertical or horizontal mount
- ADA Compliant
- Meets 2013 California Title 24 Efficiency
- Driver located in junction box.
- Smooth and continuous ELV dimming
- 80,000 hour rated life
- Color Temp: 2700K (3000K and 3500K available as special order)
- 90 CRI

SPECIFICATIONS

- **Construction:** Steel
- **Driver size:** WS-7213F/WS-7222F - 2 3/4" x 1 1/4" x 1 1/4"
WS-7230F - 3" x 1 7/8" x 1 1/4"

ORDERING NUMBER

Model#	Voltage	Length	Watt	LED Lumens	Delivered Lumens	Finish
WS-7213F	277V	13"	15.5W	1110	865	BN Brushed Nickel CH Chrome
WS-7222F	277V	22"	30W	2125	1575	
WS-7230F	277V	30"	42W	2871	2018	

 -

Example: **WS-7222F-BN**

For alternate color temperature, special order adding 30 or 35: **WS-7222F-30-BN**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760