


BURNDY® Underground Products for Network and Residential Distribution

MOLE™ COMPRESSION CONE

TYPE Z

For use with Socket and Nut assembly shown on page 32; the Z cone is machined to close tolerances to provide maximum secureness in gripping a wide range of cable sizes. Annular grooves in the inner barrel of the cone serve to further accomplish this result.

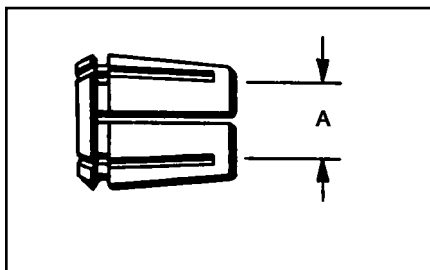

Cable Size	For Use with Socket and Nut Assembly. See Page 32	Catalog Number	A	App. Ship Wt. in Lbs. per C
			Inches	
#6 Str.	Z28NR	Z6C28	.183	8.0
#4 Str.		Z4C28	.231	7.5
#2 Str.		Z2C28	.291	7.0
1/0 Str.		Z2528	.373	6.0
3/0 Str.		Z2728	.470	4.3
4/0 Str.		Z2828	.528	3.3
#6 Str.	Z29NR	Z6C29	.183	9.5
#4 Str.		Z4C29	.231	9.3
#2 Str.		Z2C29	.291	8.5
#1 Str.		Z1C29	.330	8.0
1/0 Str.		Z2529	.373	7.0
2/0 Str.		Z2629	.416	6.3
4/0 Str.		Z2829	.528	3.8
250 kcmil		Z2929	.575	3.3
300 kcmil		Z3030	.630	6.3
#6 Str.	Z30NR	Z6C30	.183	16
#4 Str.		Z4C30	.231	15
#2 Str.		Z2C30	.291	14
#1 Str.		Z1C30	.330	14
1/0 Str.		Z2530	.373	13
2/0 Str.		Z2630	.416	12
3/0 Str.		Z2730	.470	11
4/0 Str.		Z2830	.528	9.3
250 kcmil		Z2930	.575	8.0
300 kcmil		Z3030	.630	6.3
#2 Str.	Z32NR	Z2C32	.291	21
#1 Str.		Z1C32	.330	20
1/0 Str.		Z2532	.373	19
2/0 Str.		Z2632	.416	18
3/0 Str.		Z2732	.470	17
4/0 Str.		Z2832	.528	15
250 kcmil		Z2932	.575	14
300 kcmil		Z3032	.630	12
350 kcmil		Z3132	.681	9.8
400 kcmil		Z3232	.728	8.0
#2 Str.	Z34NR & Z34NRB	Z2C34	.291	29
#1 Str.		Z1C34	.330	28
1/0 Str.		Z2534	.373	27
2/0 Str.		Z2634	.416	26
3/0 Str.		Z2734	.470	25

Cable Size	For Use with Socket and Nut Assembly. See Page 32	Catalog Number	A	App. Ship Wt. in Lbs. per C
			Inches	
4/0 Str.	Z34NR & 34NRB	Z2834	.528	22
250 kcmil		Z2934	.575	21
300 kcmil		Z3034	.630	19
350 kcmil		Z3134	.681	17
400 kcmil		Z3234	.728	15
450 kcmil		Z3334	.772	13
500 kcmil	Z36NR	Z3434	.814	11
250 kcmil		Z2936	.575	32
300 kcmil		Z3036	.630	30
350 kcmil		Z3136	.681	28
400 kcmil		Z3236	.728	26
450 kcmil		Z3336	.772	23
500 kcmil		Z3436	.814	21
550 kcmil	Z40NR & Z40NRA	Z3536	.855	19
600 kcmil		Z3636	.893	17
250 kcmil		Z2940	.575	49
300 kcmil		Z3040	.630	47
350 kcmil		Z3140	.681	44
400 kcmil		Z3240	.728	41
450 kcmil		Z3340	.772	39
500 kcmil		Z3440	.814	36
550 kcmil		Z3540	.855	33
600 kcmil		Z3640	.893	31
650 kcmil	Z44NR	Z3740	.929	29
700 kcmil		Z3840	.964	25
750 kcmil		Z3940	.998	23
800 kcmil		Z4040	1.031	21
500 kcmil		Z3444	.814	55
550 kcmil		Z3544	.855	51
600 kcmil		Z3644	.893	49
650 kcmil		Z3744	.929	47
700 kcmil		Z3844	.964	43
750 kcmil		Z3944	.998	40
800 kcmil		Z4044	1.031	38
850 kcmil		Z4144	1.062	35
900 kcmil		Z4244	1.093	32
950 kcmil		Z4344	1.123	28
1000 kcmil		Z4444	1.152	24