



CATALOG NUMBER

TYPE

PROJECT

LEDme™ Button Light Power Supply

MODEL LED-350MA03-RB

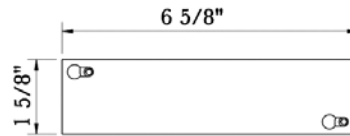

Ordering Matrix

Model	Finish
LED-350MA03-RB	BK

Ordering Example (Model-Finish) : LED-350MA03-RB

Product Details

<b>Description:</b>	Compact and reliable class 2 constant current LED power supply for up to four HR-LED85 button lights
<b>Input Voltage:</b>	120V AC
<b>Input Current:</b>	0.2A
<b>Output Voltage:</b>	12V DC
<b>Output Current:</b>	350mA DC constant current
<b>Load:</b>	3W Maximum
<b>Loading Wire:</b>	22 AWG. 6ft maximum length
<b>Listing:</b>	UL & CUL Listed.



Specification Features

- U.L. 60950 listed LED driver.
- Low profile as 1 1/8" thickness
- 350mA Constant Current for LED's optimized and stable performance.
- "Plug and Play" terminal blocks for wiring up to four HR-LED85 LED button lights
- Surge protection
- Short circuit protection to protect
- 5 year WAC Lighting product warranty

<b>CATALOG NUMBER</b>	<b>TYPE</b>
<b>PROJECT</b>	

**LEDme™ Button Light POWER SUPPLY**

**MODEL LED-350MA09-RB**

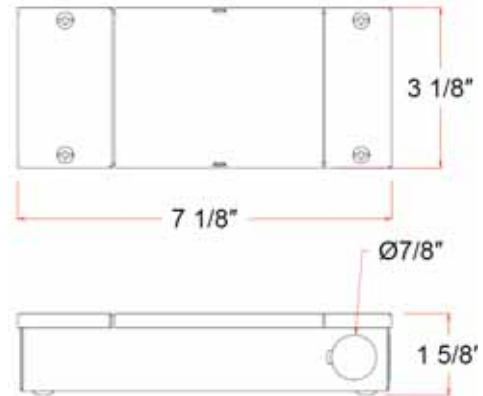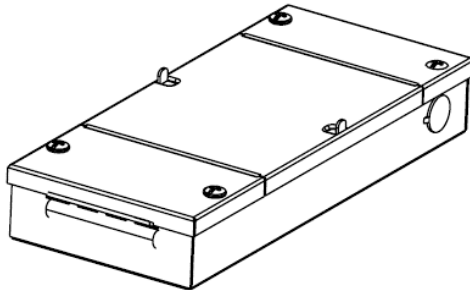

**Ordering Matrix**

Model	Finish
<input type="text"/>	<input type="text"/>
LED-350MA09-RB	BK

Ordering Example (Model-Finish) : LED-350MA09-RB

**Product Details**

<b>Description:</b>	Compact and reliable class 2 constant current LED power supply for up to four HR-LED85 button lights
<b>Input Voltage:</b>	120V AC
<b>Input Current:</b>	0.15A
<b>Output Voltage:</b>	24V DC
<b>Output Current:</b>	350mA DC constant current
<b>Load:</b>	9W Maximum
<b>Loading Wire:</b>	22 AWG. 6ft maximum length
<b>Listing:</b>	UL & CUL Listed.

**Specification Features**

- U.L. 60950 listed LED driver.
- Low profile as 1 1/8" thickness
- 350mA Constant Current for LED's optimized and stable performance.
- "Plug and Play" terminal blocks for wiring up to four HR-LED85 LED button lights
- Surge protection
- Short circuit protection to protect
- 5 year WAC Lighting product warranty