


NS-40 / NL-41 Stepped Baffle with Ring

TRIM DIMENSIONS



Trim OD: 5"
Aperture: 3-1/2"
Height: 1-7/8"

FEATURES

Trim

Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare. Non-reflective painted finishes. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

Mounting

Trim includes three trim clips that securely mount trim in housing.

Compatible Housings

Compatible with Line Voltage and Compact Fluorescent housings. See individual specification sheets for more information.

Lamp

Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

Compact Fluorescent

13W Quad/Triple (NS-406Q; NS-406EL; NSR-408Q; NSR-408EL)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

Stepped Baffle with Ring

- ☐ **NS-40:** White Stepped Baffle with White Metal Ring
- ☐ **NS-40BZBZ:** Bronze Stepped Baffle with Bronze Metal Ring
- ☐ **NS-40C:** White Stepped Baffle with Chrome Metal Ring
- ☐ **NS-40CO:** Copper Stepped Baffle with Copper Metal Ring
- ☐ **NS-40G:** White Stepped Baffle with Gold Metal Ring
- ☐ **NS-40N:** Natural Metal Stepped Baffle with Natural Metal Ring
- ☐ **NS-40P:** White Phenolic Stepped Baffle with White Plastic Ring
- ☐ **NS-41:** Black Stepped Baffle with White Metal Ring
- ☐ **NS-41B:** Black Stepped Baffle with Black Metal Ring
- ☐ **NS-41C:** Black Stepped Baffle with Chrome Metal Ring
- ☐ **NS-41G:** Black Stepped Baffle with Gold Metal Ring
- ☐ **NS-41N:** Black Stepped Baffle with Natural Metal Ring
- ☐ **NS-41P:** Black Phenolic Stepped Baffle with White Plastic Ring

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NS-401QAT

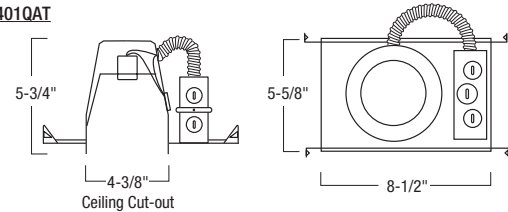


NSIC-401QAT

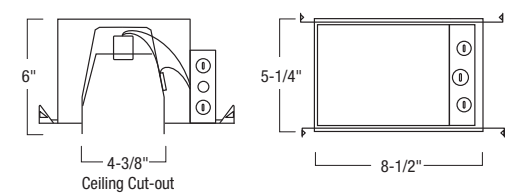


NSR-404QAT

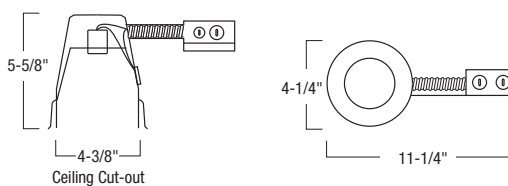

NS-406Q / NS-406EL

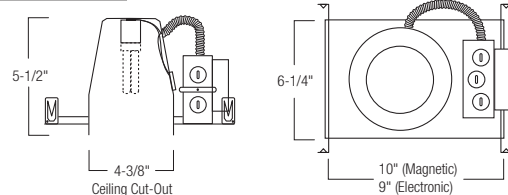

NSR-408Q / NSR-408EL

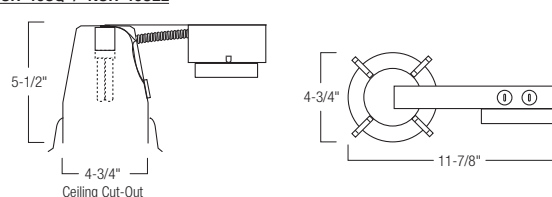

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
☐ NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
☐ NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
☐ NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

COMPACT FLUORESCENT

☐ NS-406Q	Non-IC New Constr., Magnetic	13W Quad	W: 6-1/4" L: 10" H: 5-1/2"
☐ NS-406EL	Non-IC New Constr., Electronic	13W Quad/Triple	W: 6-1/4" L: 9" H: 5-1/2"
☐ NSR-408Q	Non-IC Remodel, Magnetic	13W Quad	W: 4-3/4" L: 11-7/8" H: 5-1/2"
☐ NSR-408EL	Non-IC Remodel, Electronic	13W Quad/Triple	W: 4-3/4" L: 11-7/8" H: 5-1/2"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com

Page 1 of 1